

C-profile Type 2991


C-profile, slot width 22 mm, perforated

2991/300 FL

EAN Code: 4013339193806

Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

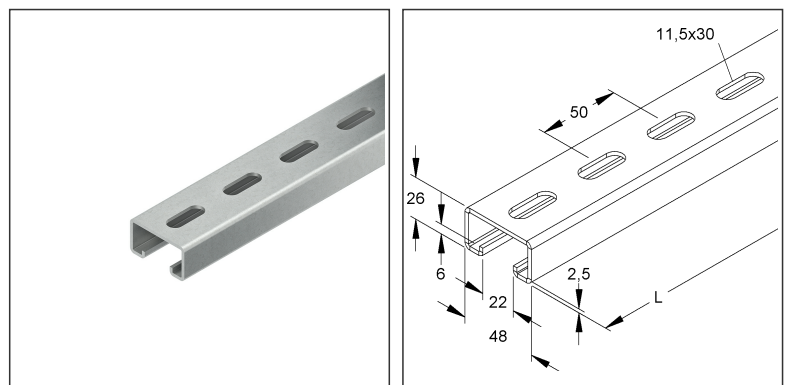

Article Description

C-profile, slot width 22 mm, 48x26x300 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461

Weight

Weight per quantity unit	721 g / pcs.
Weight in kg per 100	72 kg / 100pcs.

Physical Article Dimensions

Height	26.00 mm
Width	48.00 mm
Depth/length	300 mm

Additional Price Information

Article group	N13
quantity unit	pcs.

Technical Datasheet

Niedax rails

2991/300 FL

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	300 mm	Width	48.00 mm	Height	26.00 mm
Gross weight	0,72 kg	Volume	0,000 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

C-profile model 2991, perforated.
Suitable U-clamps (BU... and BUK...).

In personal danger zones the protective cap SKC 2991 must be fitted.
To ensure that the protective cap can be fitted without problems, a distance of at least 50 mm from the profile end must be kept free.
For use in function maintenance, please observe additional instructions!

Dimensions (approx. dimensions)
Height H x width W x material thickness t : 26 x 48 x 2.5 mm
Slot width : 22 mm
Profile perforation : 11.5 x 30 mm
central distance : 50 mm
Delivery length L : 300 mm
Material : steel, hot dip galvanised acc. to DIN EN ISO 1461
NIEDAX model no. : 2991/300 FL
EP material_____ EP wage_____
Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098