


C-profile Type 2991

C-profile, slot width 22 mm, perforated

2991/3 FL

EAN Code: 4013339193202
Smallest packaging unit: 5 x 3 m
quantity unit: m M

the photorealistic images are to be considered as reference images

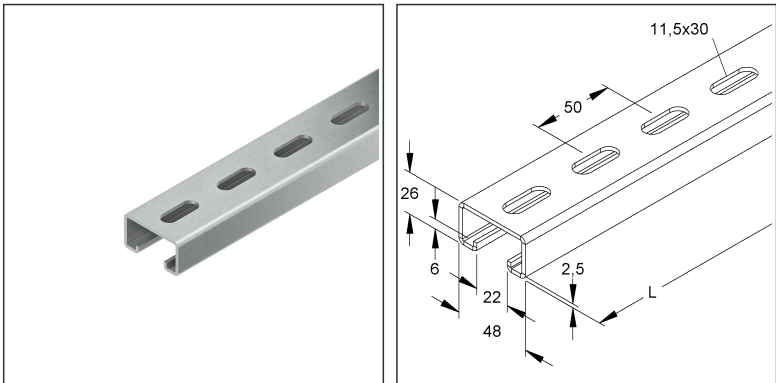

Article Description

C-profile, slot width 22 mm, 48x26x3000 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461

Weight

Weight per quantity unit	2,403 kg / m
Weight in kg per 100	240 kg / 100m

Physical Article Dimensions

Height	26.00 mm
Width	48.00 mm
Depth/length	3000 mm

Additional Price Information

Article group	N13
quantity unit	m

Technical Datasheet

Niedax rails

2991/3 FL

the photorealistic images are to be considered as reference images

Packing Dimension

3 meters = 1 piece

✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU

Lenght	3000 mm	Width	48.00 mm	Height	26.00 mm
Gross weight	7,21 kg	Volume	0,004 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

15 meters = 1 bundle

Lenght	3000 mm	Width	90.00 mm	Height	70.00 mm
Gross weight	36 kg	Volume	0,019 m³		
Min. Quantity	15.00 m	Max. Quantity	15.00 m		

600 meters = 1 rack

Lenght	3000 mm	Width	850 mm	Height	670 mm
Gross weight	1529 kg	Volume	1,708 m³		
Min. Quantity	600.00 m	Max. Quantity	600.00 m		

Tender Text

C-profile model 2991, perforated.
Suitable U-clamps (BU... and BUK...).

In personal danger zones the protective cap SKC 2991 must be fitted.
To ensure that the protective cap can be fitted without problems, a distance of at least 50 mm from the profile end must be kept free.

Dimensions (approx. dimensions)
Height H x width W x material thickness t : 26 x 48 x 2.5 mm
Slot width : 22 mm
Profile perforation : 11.5 x 30 mm
central distance : 50 mm
Delivery length L : 3000 mm
Material : steel, hot dip galvanised acc. to DIN EN ISO 1461
NIEDAX model no. : 2991/3 FL
EP material_____ EP wage_____
Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098