

C-Profile Type 2996Z

C-profile, slot width 22 mm, perforated

2996Z/6 FL




EAN Code: 4013339960699

Smallest packaging unit:6 m

quantity unit:m M



the photorealistic images are to be considered as reference images

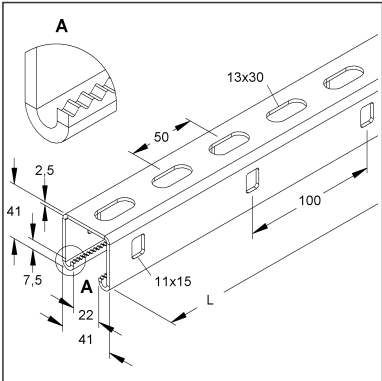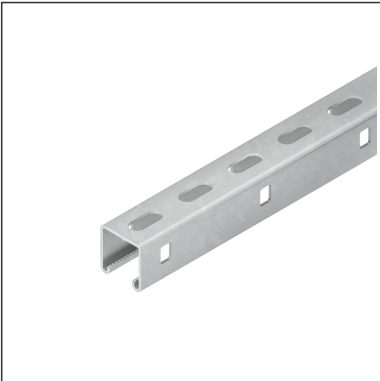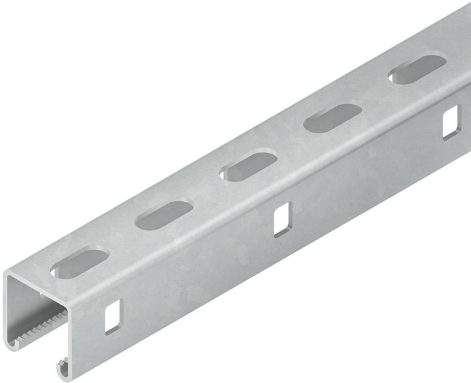

Article Description

C-profile, slot width 22 mm, 41x41x6000 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461, interlocked

Weight

Weight per quantity unit	2,653 kg / m
Weight in kg per 100	265 kg / 100m

Physical Article Dimensions

Height	41.00 mm
Width	41.00 mm
Depth/length	6000 mm

Technical Datasheet

Niedax rails

2996Z/6 FL

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N13
quantity unit	m

Packing Dimension

6 meters = 1 piece		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	6000 mm	Width	41.00 mm	Height	41.00 mm
Gross weight	16 kg	Volume	0,010 m³		
Min. quantity	6.00 m	Max. Quantity	6.00 m		

300 meters = 1 bundle					
Lenght	6000 mm	Width	220 mm	Height	220 mm
Gross weight	796 kg	Volume	0,290 m³		
Min. Quantity	300.00 m	Max. Quantity	300.00 m		

Tender Text

C-profile model 2996Z with toothing, bottom and sides continuously perforated. Sliding nut GMZ M...-22 F and screws or hammer head bolt HMZ M.../... F please order separately.
Suitable U-clamps (BU... and BUK...).

The protective cap SKC 88/96 must be fitted in personal danger areas. To ensure that the protective cap can be fitted without problems, a distance of at least 30 mm from the end of the profile must be maintained.

Dimensions (approx. dimensions)
Height H x width W x material thickness t : 41 x 41 x 2.5 mm
Slot width : 22 mm
Profile bottom perforation : 13 x 30 mm
central distance : 50 mm
Profile side perforation : 11 x 15 mm
central distance : 100 mm
Delivery length L : 6000 mm
Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461
NIEDAX Model No. : 2996Z/6 FL
EP Material_____ EP Wage_____
Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098