

C-Profile Type 2997Z

C-profile, slot width 22 mm, perforated

2997Z/3 FL


EAN Code: 4013339173662

Smallest packaging unit: 3 m

quantity unit: m M



the photorealistic images are to be considered as reference images

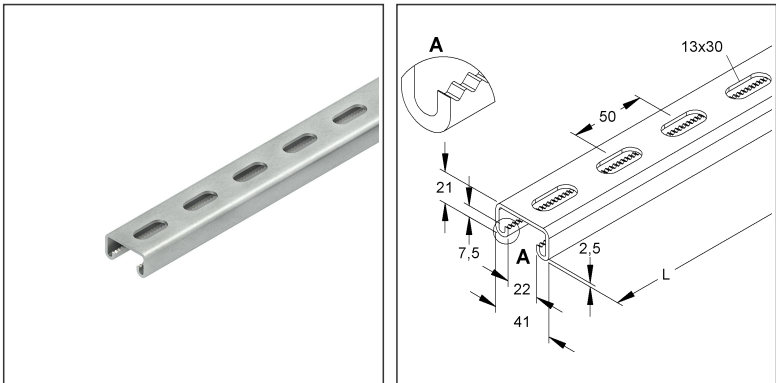

Article Description

C-profile, slot width 22 mm, 41x21x3000 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461, interlocked

Weight

Weight per quantity unit	1,844 kg / m
Weight in kg per 100	184 kg / 100m

Physical Article Dimensions

Height	21.00 mm
Width	41.00 mm
Depth/length	3000 mm

Technical Datasheet

Niedax rails

2997Z/3 FL

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N13
quantity unit	m

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	3000 mm	Width	41.00 mm	Height	21.00 mm
Gross weight	5,53 kg	Volume	0,003 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

750 meters = 1 rack					
Lenght	3000 mm	Width	850 mm	Height	670 mm
Gross weight	1470 kg	Volume	1,708 m³		
Min. Quantity	750.00 m	Max. Quantity	750.00 m		

Tender Text

C-profile model 2997Z with serration, bottom continuously perforated. Sliding nut GMZ M.. F and screws or hammerhead screw HMZ M10/... F to be ordered separately. Suitable U-clamps (BU... and BUK...).

The protective cap SKC 86 must be fitted in personal hazard areas. To ensure that the protective cap can be fitted without problems, a distance of at least 30 mm from the end of the profile must be maintained.

Dimensions (approx. dimensions)

Height H x width W x material thickness t : 21 x 41 x 2.5 mm

Slot width : 22 mm

Profile perforation : 13 x 30 mm

centre distance : 50 mm

Delivery length L : 3000 mm

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model no. : 2997Z/3 FL

EP Material_____ EP Wage_____

Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098