


C-profile, double, Type 2996ZD

C-profile with serration, slot width 22 mm, perforated, riveted

2996ZD/4500 FL

EAN Code: 4013339960705
Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

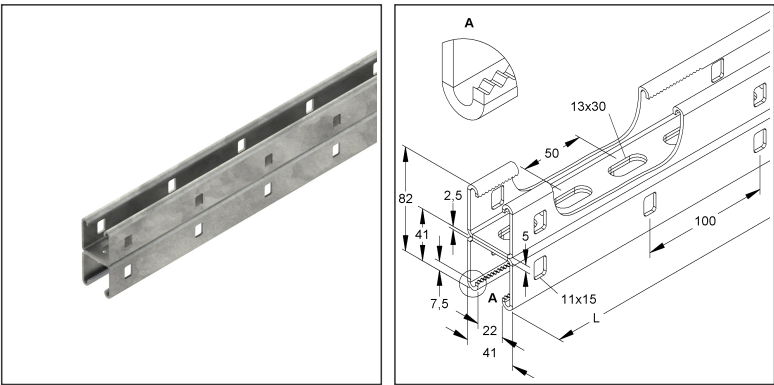

Article Description

C-profile, double, slot width 22 mm, 41x82x4500 mm, perforated, Steel, galvanised according to DIN EN ISO 1461, teathed

Weight

Weight per quantity unit	24 kg/ pcs.
Weight in kg per 100	2390 kg/ 100pcs.

Physical Article Dimensions

Height	82.00 mm
Width	41.00 mm
Depth/length	4500 mm

Technical Datasheet

Niedax rails

2996ZD/4500 FL

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N13
quantity unit	pcs.

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	4500 mm	Width	41.00 mm	Height	82.00 mm
Gross weight	24 kg	Volume	0,015 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

C-profile model 2996ZD, double riveted, with toothing, bottom and sides continuously perforated, for covering the profile ends. Sliding nut GMZ M...-22 F and screws or hammer head bolt HMZ M.../... F to be ordered separately. Suitable U-clamps (BU... and BUK...).

The protective cap SKCED 96 must be fitted in personal hazard areas. To ensure that the protective cap can be fitted without problems, a distance of at least 30 mm from the end of the profile must be maintained.

Dimensions (approx. dimensions)

Height H x width W x material thickness t : 82 x 41 x 2.5 mm

Slot width : 22 mm

Profile bottom perforation : 13 x 30 mm

central distance : 50 mm

Profile side perforation : 11 x 15 mm

central distance : 100 mm

Delivery length L : 4500 mm

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : 2996ZD/4500 FL

EP Material_____ EP Wage_____

Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098