

Profile for Convection Grid


GKG 2000 C

EAN Code: 4013339464708

Smallest packaging unit: 10 x 2 m

quantity unit: m M

the photorealistic images are to be considered as reference images

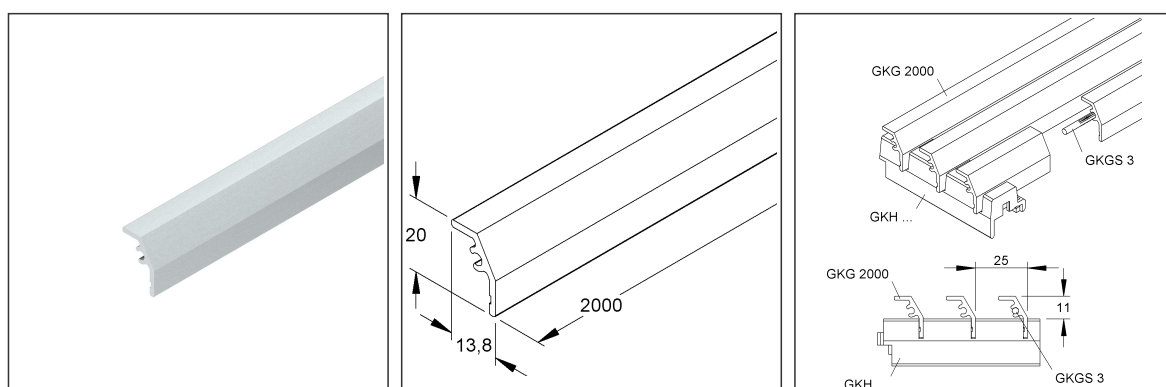

Article Description

Profile for convection grid, length 2000 mm, aluminium, powder-coated

Additional Price Information

Article group	N17
quantity unit	m

Weight

Weight per quantity unit	176 g / m
Weight in kg per 100	18 kg / 100m

Physical Article Dimensions

Height	20.00 mm
Width	13.80 mm
Depth/length	2000 mm

Technical Datasheet

Device trunking system

GKG 2000 C

the photorealistic images are to be considered as reference images

Packing Dimension

2 meters = 1 piece

Lenght	2000 mm	Width	14.00 mm	Height	20.00 mm
Gross weight	0,35 kg	Volume	0,001 m³		
Min. quantity	2.00 m	Max. Quantity	2.00 m		

20 meters = 1 bundle

✓ VP2-smallest Packaging Unit (PU) ✓ VP2-preferred PU

Gross weight	3,51 kg				
Min. Quantity	20.00 m	Max. Quantity	20.00 m		

120 meters = 1

Lenght	2000 mm	Width	14.00 mm	Height	20.00 mm
Gross weight	21 kg	Volume	0,001 m³		
Min. Quantity	120.00 m	Max. Quantity	120.00 m		

Tender Text

Convection wire profile, visible surfaces electronically powder-coated in RAL colour acc. to the manufacturer's catalogue, for creating convection wires of any width in a grid dimension of 25 mm using the system profile holders GKH..., please order coupling pins GKGS 3 for connecting the convection wire profiles separately.

Dimensions (approx. dimensions) H x D : 20 x 13.8 mm

Delivery length L : 2000 mm

Distance from the back of the duct to the wall : _____ mm

Colour: _____ RAL: _____

Material : Aluminium

NIEDAX Model No. : GKG 2000 C

EP Material _____ EP Lohn _____

Unit price/meter

Safety & Environment

REACH Date	21.01.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	76109090