


Profile for Convection Grid

GKS 2000 C

EAN Code: 4013339465187
Smallest packaging unit: 60 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

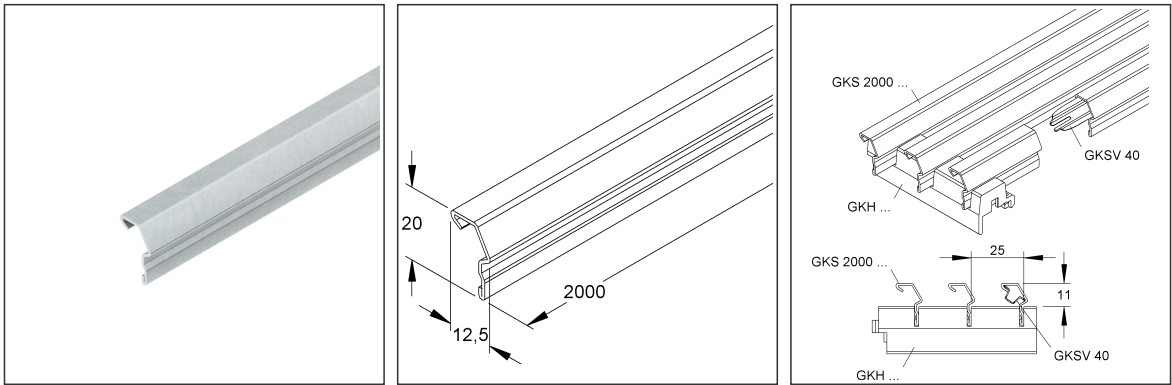

Article Description

Profile for convection grid, length 2000 mm, steel, pre-galvanised according to DIN EN 10346, powder-coated

Additional Price Information

Article group	N17
quantity unit	m

Weight

Weight per quantity unit	271 g / m
Weight in kg per 100	27 kg / 100m

Physical Article Dimensions

Height	20.00 mm
Width	12.50 mm
Depth/length	2000 mm

Technical Datasheet

Device trunking system

GKS 2000 C

the photorealistic images are to be considered as reference images

Packing Dimension

120 meters = 1		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	2000 mm	Width	110.00 mm	Height	400 mm
Gross weight	32 kg	Volume	0,088 m³		
Min. quantity	120.00 m	Max. Quantity	120.00 m		

Tender Text

Convection mesh profile, visible surfaces electrostatically powder-coated in RAL colour acc. to manufacturer's catalogue, for creating convection meshes of any width in a grid dimension of 25 mm using system-associated profile holders GKH..., please order splice plates GKSV 40 for the convection mesh profiles separately.

Dimensions (approx. dimensions) H x D : 20 x 12.5 mm

Delivery length L : 2000 mm

Distance from duct back to wall : _____ mm

Colour: _____ RAL: _____

Material : Steel, pre-galvanised acc. to DIN EN 10346

NIEDAX Model no. : GKS 2000 C

EP Material _____ EP Wage _____

Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098