


Profile for Convection Grid

GKS 2000 L

EAN Code: 4013339741007
Smallest packaging unit: 10 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

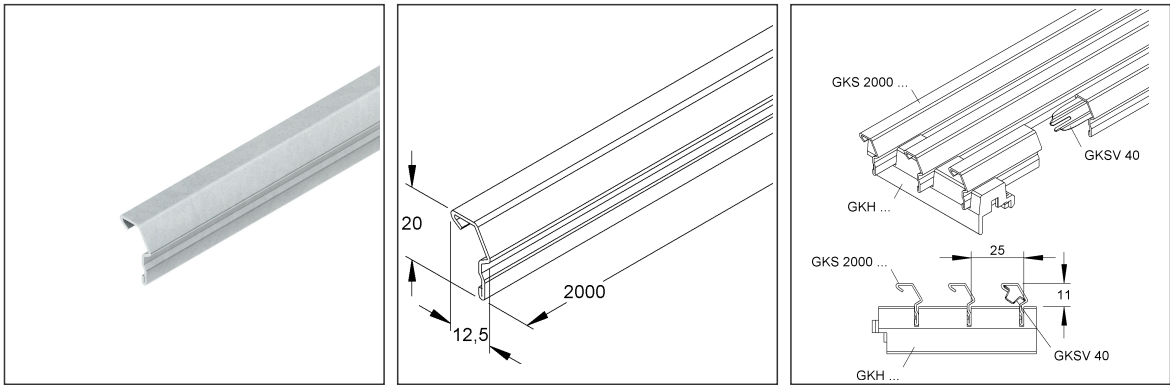

Article Description

Profile for convection grid, length 2000 mm, steel, pre-galvanised according to DIN EN 10346, powder-coated, RAL7035

Additional Price Information

Article group	N17
quantity unit	m

Weight

Weight per quantity unit	271 g / m
Weight in kg per 100	27 kg / 100m

Physical Article Dimensions

Height	20.00 mm
Width	12.50 mm
Depth/length	2000 mm

Technical Datasheet

Device trunking system

GKS 2000 L

the photorealistic images are to be considered as reference images

Packing Dimension

20 meters = 1 bundle		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	2000 mm	Width	60.00 mm	Height	200.00 mm
Gross weight	5,41 kg	Volume	0,024 m³		
Min. quantity	20.00 m	Max. Quantity	20.00 m		

120 meters = 1					
Lenght	2000 mm	Width	110.00 mm	Height	400 mm
Gross weight	32 kg	Volume	0,088 m³		
Min. Quantity	120.00 m	Max. Quantity	120.00 m		

Tender Text

Convection mesh profile, visible surfaces electrostatically powder-coated in RAL colour acc. to the manufacturer's catalogue, for creating convection meshes of any width in a grid dimension of 25 mm using the GKH... profile holders GKH..., please order Splice plates GKSV 40 for the convection mesh profiles separately. Dimensions (approx. dimensions) H x D : 20 x 12.5 mm
Delivery length L : 2000 mm
Distance from the back of the duct to the wall : _____ mm
Colour : light grey RAL : 7035
Material : steel, pre-galvanised acc. to DIN EN 10346
NIEDAX Model No. : GKS 2000 L
EP Material _____ EP Lohn _____
Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098