

Profile for Convection Grid

GKS 2000 S


EAN Code: 4013339465125

Smallest packaging unit: 10 x 2 m

quantity unit: m M



the photorealistic images are to be considered as reference images

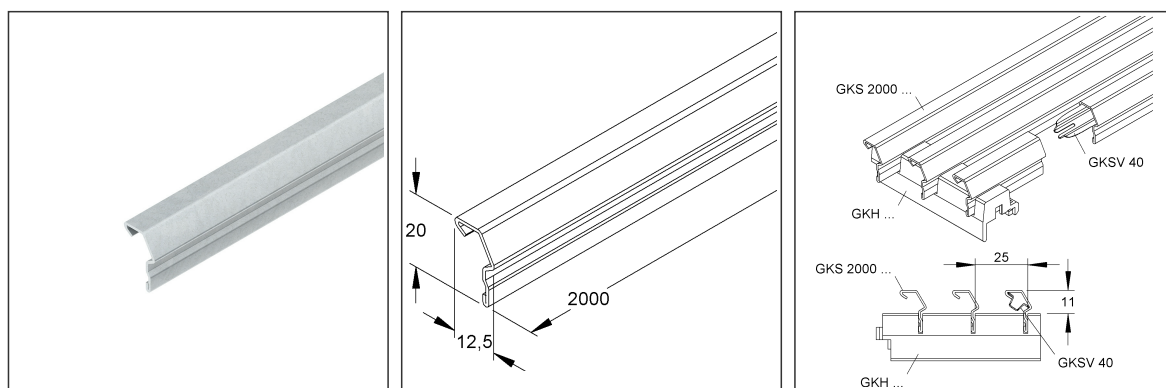

Article Description

Profile for convection grid, length 2000 mm, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N17
quantity unit	m

Weight

Weight per quantity unit	261 g / m
Weight in kg per 100	26 kg / 100m

Physical Article Dimensions

Height	20.00 mm
Width	12.50 mm
Depth/length	2000 mm

Technical Datasheet

Device trunking system

GKS 2000 S

the photorealistic images are to be considered as reference images

Packing Dimension

20 meters = 1 bundle		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU	
Gross weight	5,2 kg		
Min. quantity	20.00 m	Max. Quantity	20.00 m
120 meters = 1			
Lenght	2000 mm	Width	13.00 mm
		Height	20.00 mm
Gross weight	31 kg	Volume	0,000 m³
Min. Quantity	120.00 m	Max. Quantity	120.00 m

Tender Text

Convection mesh profile, for creating convection meshes of any width with a mesh spacing of 25 mm using the GKH... profile brackets belonging to the system, please order splice plates GKSV 40 for the convection mesh profiles separately. Dimensions (approx. dimensions) H x D : 20 x 12.5 mm
Delivery length L : 2000 mm
Distance from the back of the duct to the wall : _____ mm
Material : steel, spre-galvanised acc. to DIN EN 10346
NIEDAX Model No. : GKS 2000 S
EP Material _____ EP Lohn _____
Unit price/meter

Safety & Environment

REACH Date	21.01.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098