

Profile for Convection Grid


GKS 2000 W

EAN Code: 4013339465170

Smallest packaging unit: 10 x 2 m

quantity unit: m M

the photorealistic images are to be considered as reference images

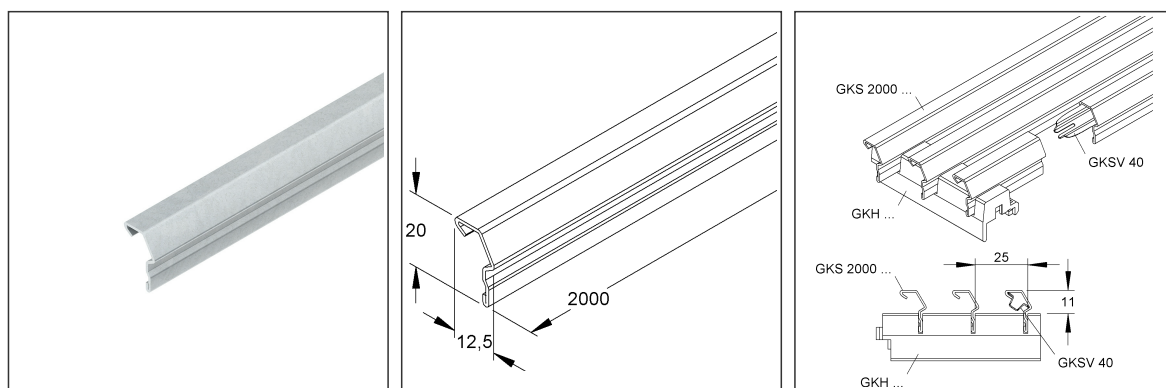

Article Description

Profile for convection grid, length 2000 mm, steel, pre-galvanised according to DIN EN 10346, powder-coated, RAL9001

Additional Price Information

Article group	N17
quantity unit	m

Technical Datasheet

Device trunking system

GKS 2000 W

the photorealistic images are to be considered as reference images

Packing Dimension

20 meters = 1 bundle		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	2000 mm	Width	60.00 mm	Height	200.00 mm
Gross weight	5,41 kg	Volume	0,024 m³		
Min. quantity	20.00 m	Max. Quantity	20.00 m		

120 meters = 1					
Lenght	2000 mm	Width	110.00 mm	Height	400 mm
Gross weight	32 kg	Volume	0,088 m³		
Min. Quantity	120.00 m	Max. Quantity	120.00 m		

Tender Text

Convection mesh profile, visible surfaces electrostatically powder-coated in RAL colour acc. to the manufacturer's catalogue, for creating convection meshes of any width in a mesh spacing of 25 mm using the GKH... profile holders GKH..., please order splice plates GKSV 40 for the convection mesh profiles separately. Dimensions (approx. dimensions) H x D : 20 x 12.5 mm
Delivery length L : 2000 mm
Distance from the back of the duct to the wall : _____ mm
Colour : cream white RAL : 9001
Material : steel, pre-galvanised acc. to DIN EN 10346
NIEDAX Model No. : GKS 2000 W
EP Material _____ EP Lohn _____
Unit price/meter

Safety & Environment