


Profile U 4530

U 4530/200 SL

EAN Code: 4013339165223

Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

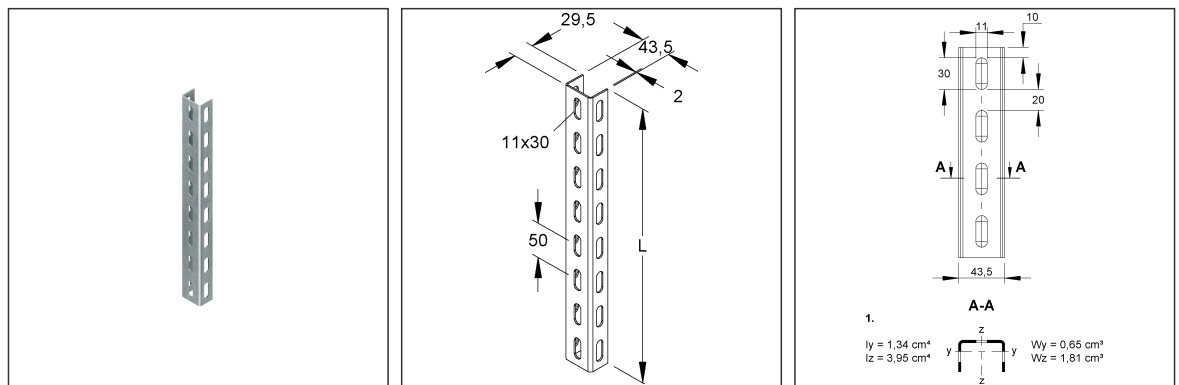

Article Description

U-profile, 43,5x29,5x200 mm, perforated, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	244 g / pcs.
Weight in kg per 100	24 kg / 100pcs.

Physical Article Dimensions

Height	29.50 mm
Width	43.50 mm
Depth/length	200.00 mm

Technical Datasheet

Profile and Overhead Hanger

U 4530/200 SL

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	200.00 mm	Width	44.00 mm	Height	30.00 mm
Gross weight	0,24 kg	Volume	0,000 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

10 pieces = 1 carton		✓ VP2-preferred PU			
Lenght	210 mm	Width	150.00 mm	Height	100.00 mm
Gross weight	2,63 kg	Volume	0,003 m³		
Min. Quantity	10.00 pcs.	Max. Quantity	10.00 pcs.		

1890 pallets = 1 piece					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	512 kg	Volume	0,960 m³		
Min. Quantity	1.890.00 pcs.	Max. Quantity	1.890.00 pcs.		

Tender Text

Profile U 4530, three-sided continuous perforation, for creating overhead hangers and supporting constructions with system components.
Dimensions (approx. dimensions)
U-profile : 43.5 x 29.5 x 29.5 mm
Profile thickness t : 2 mm
Three-sided profile perforation,
single row : 11 x 30 mm
Central distance : 50 mm
Length L : 200 mm
Material : Steel, pre-galvanised acc. to DIN EN 10346
NIEDAX Model no. : U 4530/200 SL
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059