

Profile U 4530




U 4530/2000 SL

EAN Code: 4013339165230

Smallest packaging unit: 2 m

quantity unit: m M

the photorealistic images are to be considered as reference images

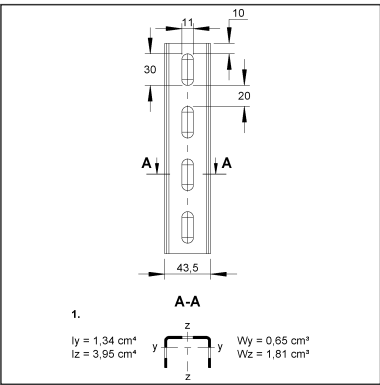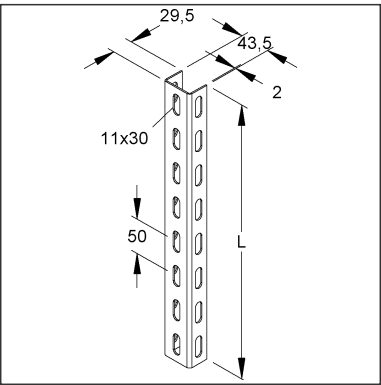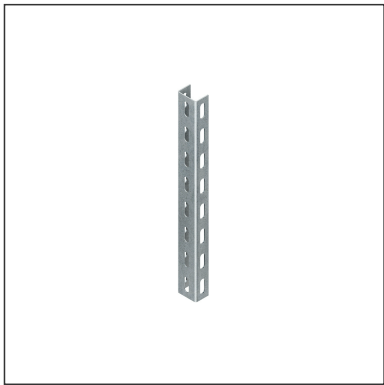

Article Description

U-profile, 43,5x29,5x2000 mm, perforated, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	1,220 kg / m
Weight in kg per 100	122 kg / 100m

Physical Article Dimensions

Height	29.50 mm
Width	43.50 mm
Depth/length	2000 mm

Technical Datasheet

Profile and Overhead Hanger

U 4530/2000 SL

the photorealistic images are to be considered as reference images

Packing Dimension

2 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	2000 mm	Width	44.00 mm	Height	30.00 mm
Gross weight	2,44 kg	Volume	0,003 m³		
Min. quantity	2.00 m	Max. Quantity	2.00 m		

800 meters = 1 rack					
Lenght	2000 mm	Width	850 mm	Height	770 mm
Gross weight	1035 kg	Volume	1,309 m³		
Min. Quantity	800.00 m	Max. Quantity	800.00 m		

Tender Text

Profile U 4530, three-sided continuous perforation, for creating overhead hangers and supporting constructions with system components. Dimensions (approx. dimensions) U-profile : 43.5 x 29.5 x 29.5 mm Profile thickness t : 2 mm Three-sided profile perforation, single row : 11 x 30 mm Central distance : 50 mm Length L : 2000 mm Material : Steel, pre-galvanised acc. to DIN EN 10346 NIEDAX Model no. : U 4530/2000 SL EP Material_____ EP Wage_____ Unit price/piece	
--	--

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059