

Profile U 4530

U 4530/3000 SL


EAN Code: 4013339165179

Smallest packaging unit: 3 m

quantity unit: m M



the photorealistic images are to be considered as reference images

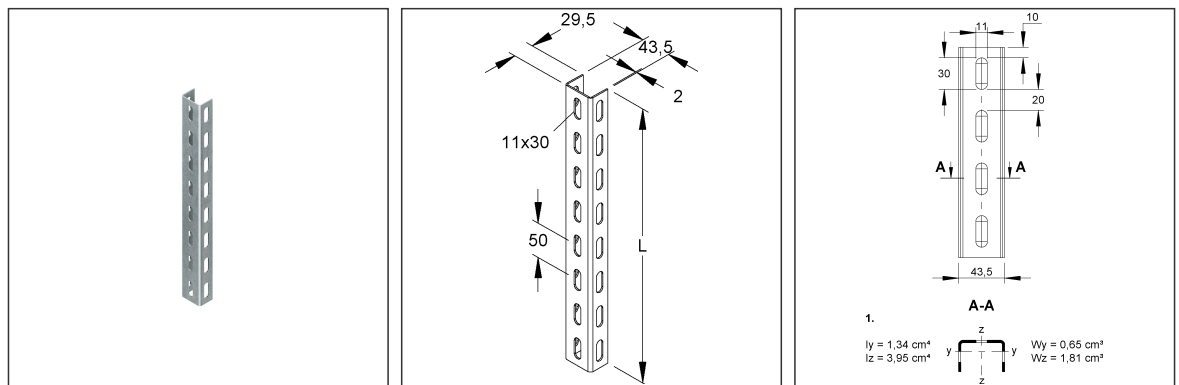

Article Description

U-profile, 43,5x29,5x3000 mm, perforated, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	1,220 kg / m
Weight in kg per 100	122 kg / 100m

Physical Article Dimensions

Height	29.50 mm
Width	43.50 mm
Depth/length	3000 mm

Technical Datasheet

Profile and Overhead Hanger

U 4530/3000 SL

the photorealistic images are to be considered as reference images

Packing Dimension

3 meters = 1 piece

✓ VP1-smallest packaging unit (PU)

Lenght	3000 mm	Width	44.00 mm	Height	30.00 mm
Gross weight	3,66 kg	Volume	0,004 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

750 meters = 1 rack

Lenght	3000 mm	Width	850 mm	Height	670 mm
Gross weight	1002 kg	Volume	1,708 m³		
Min. Quantity	750.00 m	Max. Quantity	750.00 m		

Tender Text

Profile U 4530, three-sided continuous perforation, for creating overhead hangers and supporting constructions with system components.

Dimensions (approx. dimensions)

U-profile : 43.5 x 29.5 x 29.5 mm

Profile thickness t : 2 mm

Three-sided profile perforation,
single row : 11 x 30 mm

Central distance : 50 mm

Length L : 3000 mm

Material : Steel, pre-galvanised acc. to DIN EN 10346

NIEDAX Model no. : U 4530/3000 SL

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059