


Profile U 4530

U 4530/500 SL

EAN Code: 4013339165162

Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

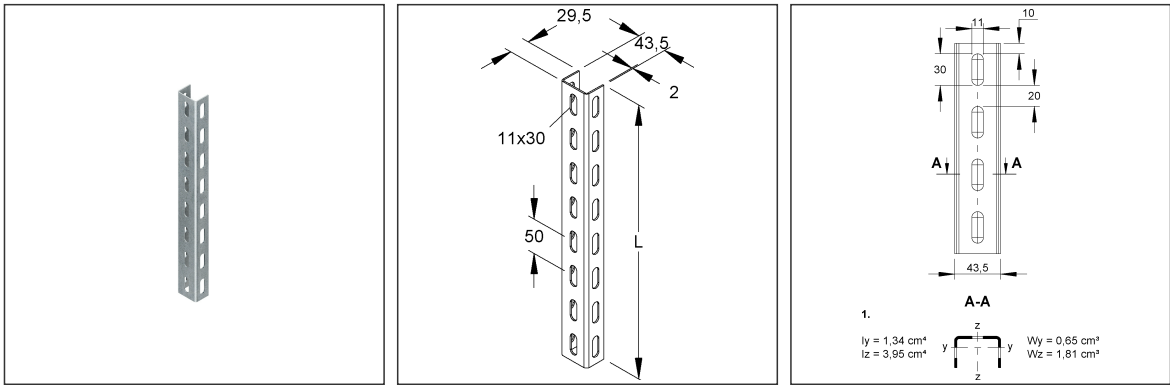

Article Description

U-profile, 43,5x29,5x500 mm, perforated, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	610 g / pcs.
Weight in kg per 100	61 kg / 100pcs.

Physical Article Dimensions

Height	29.50 mm
Width	43.50 mm
Depth/length	500 mm

Technical Datasheet

Profile and Overhead Hanger

U 4530/500 SL

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece

Lenght	500 mm	Width	44.00 mm	Height	30.00 mm
Gross weight	0,61 kg	Volume	0,001 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

10 pieces = 1 carton

✓ VP2-smallest Packaging Unit (PU) ✓ VP2-preferred PU

Lenght	520 mm	Width	140.00 mm	Height	100.00 mm
Gross weight	6,49 kg	Volume	0,007 m³		
Min. Quantity	10.00 pcs.	Max. Quantity	10.00 pcs.		

700 pallets = 1 piece

Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	469 kg	Volume	0,960 m³		
Min. Quantity	700.00 pcs.	Max. Quantity	700.00 pcs.		

Tender Text

Profile U 4530, three-sided continuous perforation, for creating overhead hangers and supporting constructions with system components.

Dimensions (approx. dimensions)

U-profile : 43.5 x 29.5 x 29.5 mm

Profile thickness t : 2 mm

Three-sided profile perforation,

single row : 11 x 30 mm

Central distance : 50 mm

Length L : 500 mm

Material : Steel, pre-galvanised acc. to DIN EN 10346

NIEDAX Model no. : U 4530/500 SL

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059