

Profile U 4530




U 4530/6000 SL

EAN Code: 4013339165148

Smallest packaging unit: 6 m

quantity unit: m M

the photorealistic images are to be considered as reference images

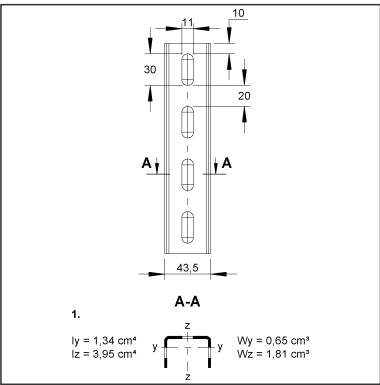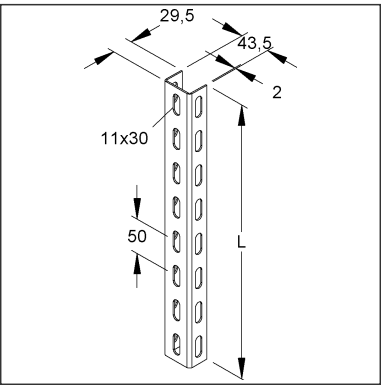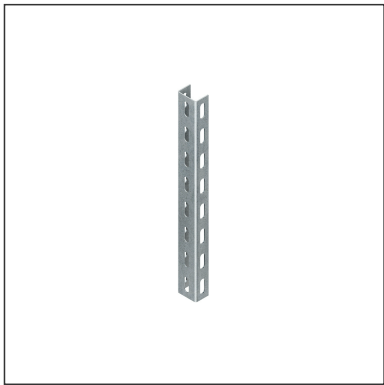

Article Description

U-profile, 43,5x29,5x6000 mm, perforated, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	1,220 kg / m
Weight in kg per 100	122 kg / 100m

Physical Article Dimensions

Height	29.50 mm
Width	43.50 mm
Depth/length	6000 mm

Technical Datasheet

Profile and Overhead Hanger

U 4530/6000 SL

the photorealistic images are to be considered as reference images

Packing Dimension

6 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	6000 mm	Width	44.00 mm	Height	30.00 mm
Gross weight	7,32 kg	Volume	0,008 m³		
Min. quantity	6.00 m	Max. Quantity	6.00 m		

300 meters = 1 bundle					
Lenght	6000 mm	Width	495 mm	Height	743 mm
Gross weight	366 kg	Volume	2,205 m³		
Min. Quantity	300.00 m	Max. Quantity	300.00 m		

Tender Text

Profile U 4530, three-sided continuous perforation, for creating overhead hangers and supporting constructions with system components.
Dimensions (approx. dimensions)
U-profile : 43.5 x 29.5 x 29.5 mm
Profile thickness t : 2 mm
Three-sided profile perforation,
single row : 11 x 30 mm
Central distance : 50 mm
Length L : 6000 mm
Material : Steel, pre-galvanised acc. to DIN EN 10346
NIEDAX Model no. : U 4530/6000 SL
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tarif number	73089059