


Profile U 5050

epoxied

U 5050/1500 C1KG

EAN Code: 4013339967360
Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

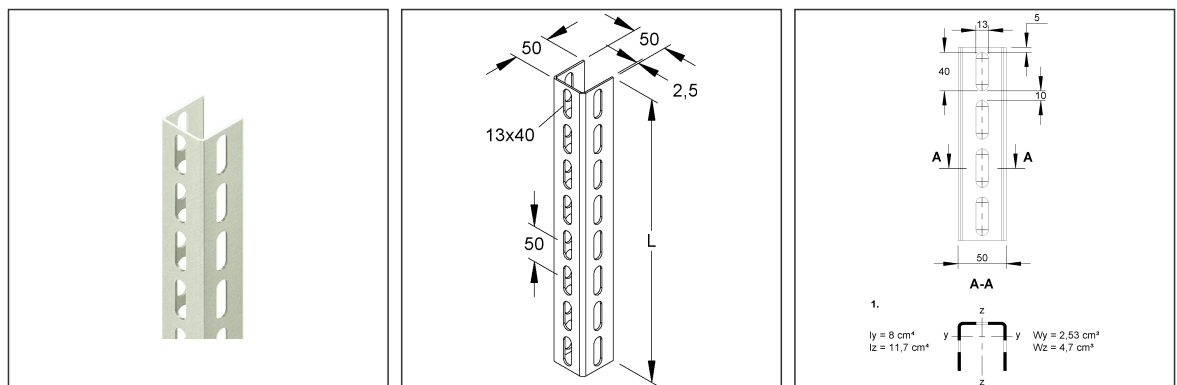

Article Description

U-profile, 50x50x1500 mm, perforated, epoxy coating 60-80 µm, RAL 7032, pebble grey

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	3,791 kg / pcs.
Weight in kg per 100	379 kg / 100pcs.

Physical Article Dimensions

Height	50.00 mm
Width	49.80 mm
Depth/length	1500 mm

Technical Datasheet

Profile and Overhead Hanger

U 5050/1500 C1KG

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	1500 mm	Width	50.00 mm	Height	50.00 mm
Gross weight	3,79 kg	Volume	0,004 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

112 pieces = 1 rack					
Lenght	1500 mm	Width	850 mm	Height	770 mm
Gross weight	484 kg	Volume	0,982 m³		
Min. Quantity	112.00 pcs.	Max. Quantity	112.00 pcs.		

Tender Text

Profile U 5050, continuously perforated on three sides, for creating overhead hangers and supporting structures with system components.

Dimensions (approx. dimensions)

U-profile : 50 x 50 x 50 mm

Profile thickness t : 2.5 mm

three-sided profile perforation,

single row : 12 x 30 mm

central distance : 50 mm

Length L : 1500 mm

Colour : pebble grey

RAL : 7032 (similar)

Surface coating : epoxy-polyester resin coating 60 - 80 µm, halogen-free

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX model no. : U 5050/1500 C1KG

EP material_____ EP wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059