

Profile U 5050

epoxied




U 5050/2000 C1KG

EAN Code: 4013339967377

Smallest packaging unit: 2 m

quantity unit: m M

the photorealistic images are to be considered as reference images

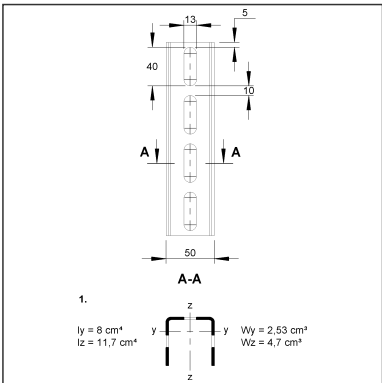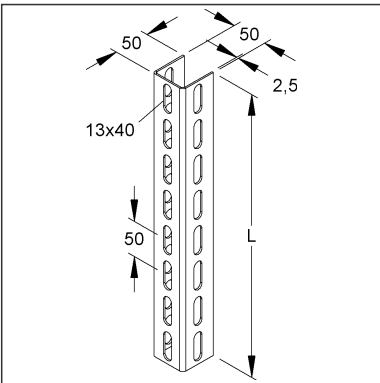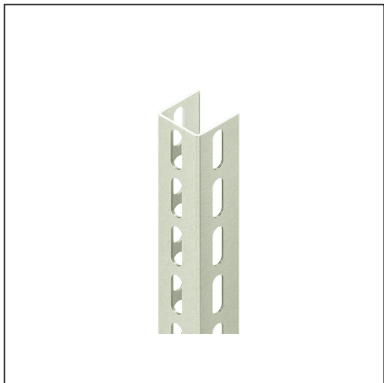

Article Description

U-profile, 50x50x2000 mm, perforated, epoxy coating 60-80 µm, RAL 7032, pebble grey

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	2,527 kg / m
Weight in kg per 100	253 kg / 100m

Physical Article Dimensions

Height	50.00 mm
Width	49.80 mm
Depth/length	2000 mm

Technical Datasheet

Profile and Overhead Hanger

U 5050/2000 C1KG

the photorealistic images are to be considered as reference images

Packing Dimension

2 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	2000 mm	Width	50.00 mm	Height	50.00 mm
Gross weight	5,05 kg	Volume	0,005 m³		
Min. quantity	2.00 m	Max. Quantity	2.00 m		

224 meters = 1 rack					
Lenght	2000 mm	Width	850 mm	Height	770 mm
Gross weight	625 kg	Volume	1,309 m³		
Min. Quantity	224.00 m	Max. Quantity	224.00 m		

Tender Text

Profile U 5050, continuously perforated on three sides, for creating overhead hangers and supporting structures with system components. Dimensions (approx. dimensions) U-profile : 50 x 50 x 50 mm Profile thickness t : 2.5 mm three-sided profile perforation, single row : 12 x 30 mm central distance : 50 mm Length L : 2000 mm Colour : pebble grey RAL : 7032 (similar) Surface coating : epoxy-polyester resin coating 60 - 80 µm, halogen-free Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461 NIEDAX model no. : U 5050/2000 C1KG EP material_____ EP wage_____ Unit price/piece	
--	--

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059