




Profile U 5050

U 5050/1000 F

EAN Code: 4013339918706

Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

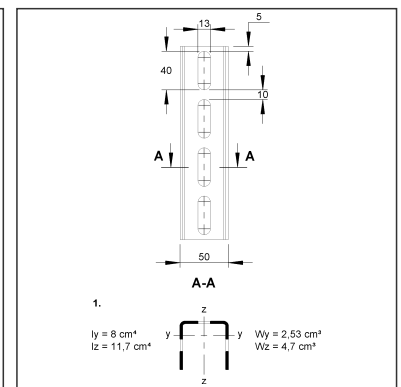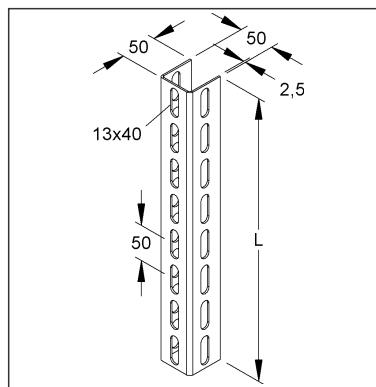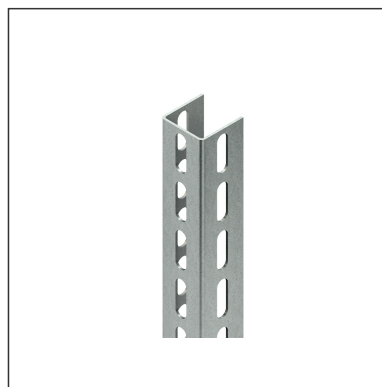

Article Description

U-profile, 50x50x1000 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	2,430 kg / pcs.
Weight in kg per 100	243 kg / 100pcs.

Physical Article Dimensions

Height	50.00 mm
Width	49.80 mm
Depth/length	1000 mm

Technical Datasheet

Profile and Overhead Hanger

U 5050/1000 F

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	1000 mm	Width	50.00 mm	Height	50.00 mm
Gross weight	2,43 kg	Volume	0,002 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

170 pieces = 1					
Lenght	1230 mm	Width	840 mm	Height	970 mm
Gross weight	483 kg	Volume	1,002 m³		
Min. Quantity	170.00 pcs.	Max. Quantity	170.00 pcs.		

Tender Text

Profile U 5050, continuously perforated on three sides, for creating overhead hangers and supporting structures with system components. Please observe additional regulations for use in functional maintenance!

Dimensions (approx. dimensions)

U-profile : 50 x 50 x 50 mm

Profile thickness t : 2.5 mm

three-sided profile perforation,

single row : 12 x 30 mm

central distance : 50 mm

Length L : 1000 mm

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX model no. : U 5050/1000 F

EP material_____ EP wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Federal State of Origin	RP
Customs tariff number	73089059