

Profile U 5050





U 5050/3000 F

EAN Code: 4013339859306

Smallest packaging unit: 3 m

quantity unit: m M

the photorealistic images are to be considered as reference images

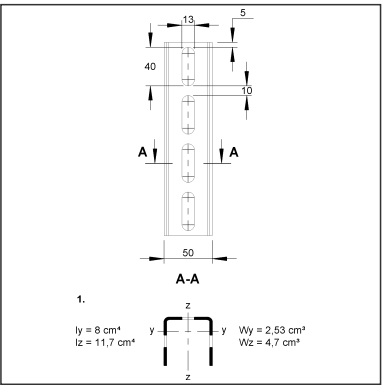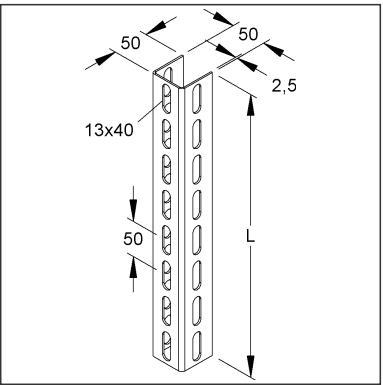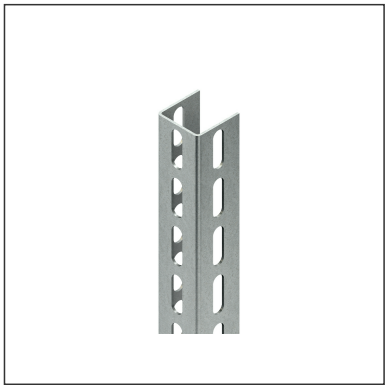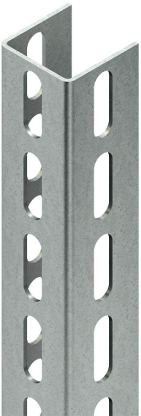

Article Description

U-profile, 50x50x3000 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	2,430 kg / m
Weight in kg per 100	243 kg / 100m

Physical Article Dimensions

Height	50.00 mm
Width	49.80 mm
Depth/length	3000 mm

Technical Datasheet

Profile and Overhead Hanger

U 5050/3000 F

the photorealistic images are to be considered as reference images

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	50.00 mm	Height	50.00 mm
Gross weight	7,29 kg	Volume	0,007 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

150 meters = 1 bundle					
Lenght	3000 mm	Width	500 mm	Height	100.00 mm
Gross weight	364 kg	Volume	0,150 m³		
Min. Quantity	150.00 m	Max. Quantity	150.00 m		

600 racks = 1 meter					
Lenght	3000 mm	Width	1162 mm	Height	1120 mm
Gross weight	1556 kg	Volume	3,904 m³		
Min. Quantity	600.00 m	Max. Quantity	600.00 m		

Tender Text

Profile U 5050, continuously perforated on three sides, for creating overhead hangers and supporting structures with system components.

Dimensions (approx. dimensions)

U-profile : 50 x 50 x 50 mm

Profile thickness t : 2.5 mm

three-sided profile perforation,

single row : 12 x 30 mm

central distance : 50 mm

Length L : 3000 mm

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX model no. : U 5050/3000 F

EP material_____ EP wage_____

Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Federal State of Origin	RP
Customs tariff number	73089059