




Profile U 5050

U 5050/4500 F

EAN Code: 4013339859313

Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

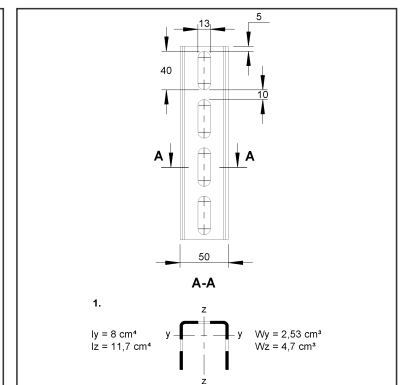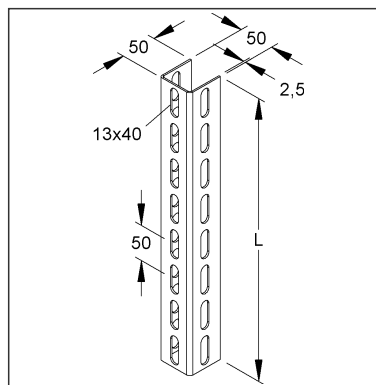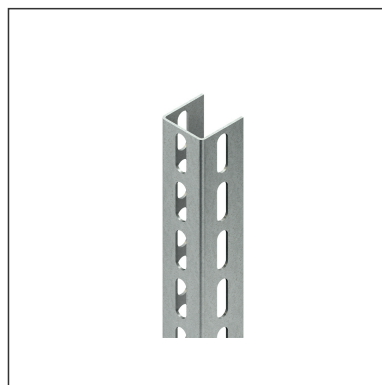

Article Description

U-profile, 50x50x4500 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	11 kg / pcs.
Weight in kg per 100	1093 kg / 100pcs.

Physical Article Dimensions

Height	50.00 mm
Width	49.80 mm
Depth/length	4500 mm

Technical Datasheet

Profile and Overhead Hanger

U 5050/4500 F

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	4500 mm	Width	50.00 mm	Height	50.00 mm
Gross weight	11 kg	Volume	0,011 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Profile U 5050, continuously perforated on three sides, for creating overhead hangers and supporting structures with system components. Dimensions (approx. dimensions) U-profile : 50 x 50 x 50 mm Profile thickness t : 2.5 mm three-sided profile perforation, single row : 12 x 30 mm central distance : 50 mm Length L : 4500 mm Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461 NIEDAX model no. : U 5050/4500 F EP material_____ EP wage_____ Unit price/piece	
---	--

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Federal State of Origin	RP
Customs tariff number	73089059