

Profile U 6040

U 6040/3000 F




EAN Code: 4013339891740

Smallest packaging unit: 3 m

quantity unit: m M



the photorealistic images are to be considered as reference images

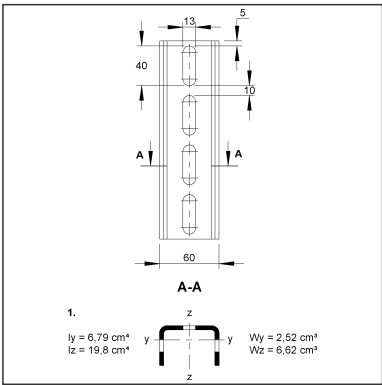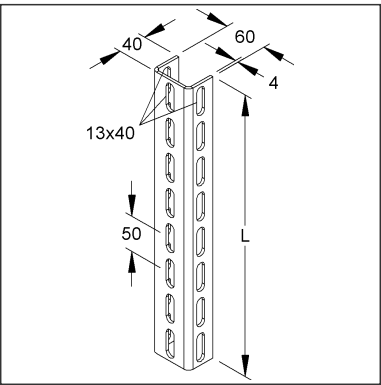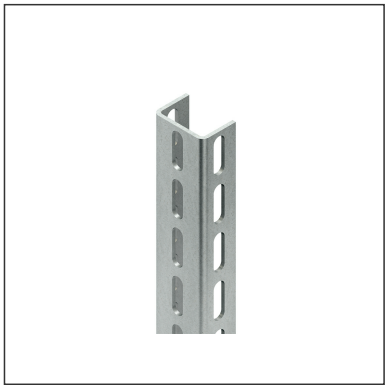

Article Description

U-profile, 60x40x3000 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	3,387 kg / m
Weight in kg per 100	339 kg / 100m

Physical Article Dimensions

Height	40.00 mm
Width	59.80 mm
Depth/length	3000 mm

Technical Datasheet

Profile and Overhead Hanger

U 6040/3000 F

the photorealistic images are to be considered as reference images

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	60.00 mm	Height	40.00 mm
Gross weight	10 kg	Volume	0,007 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

150 meters = 1 bundle					
Lenght	3000 mm	Width	600 mm	Height	80.00 mm
Gross weight	508 kg	Volume	0,144 m³		
Min. Quantity	150.00 m	Max. Quantity	150.00 m		

300 racks = 1 meter					
Lenght	3000 mm	Width	1162 mm	Height	1120 mm
Gross weight	1114 kg	Volume	3,904 m³		
Min. Quantity	300.00 m	Max. Quantity	300.00 m		

Tender Text

Profile U 6040, continuously perforated on three sides, for creating overhead hangers and supporting structures with system components.

Dimensions (approx. dimensions)

U-profile : 40 x 60 x 40 mm

Profile thickness t : 4 mm

three-sided profile perforation,

single row : 13 x 40 mm

central distance : 50 mm

Length L : 3000 mm

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX model no. : U 6040/3000 F

EP material_____ EP wage_____

Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059