




Profile U 6040

U 6040/4500 F

EAN Code: 4013339891757

Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

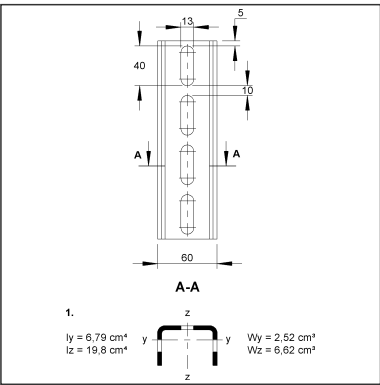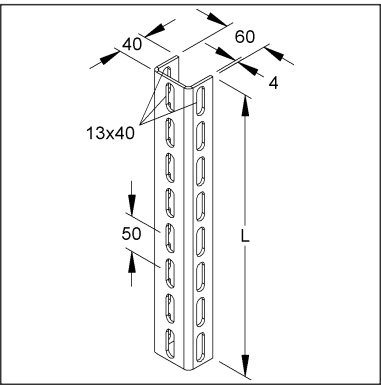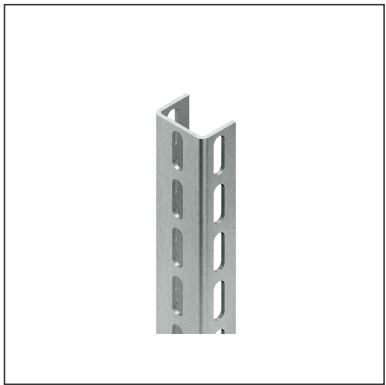

Article Description

U-profile, 60x40x4500 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	15 kg / pcs.
Weight in kg per 100	1524 kg / 100pcs.

Physical Article Dimensions

Height	40.00 mm
Width	59.80 mm
Depth/length	4500 mm

Technical Datasheet

Profile and Overhead Hanger

U 6040/4500 F

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	4500 mm	Width	60.00 mm	Height	40.00 mm
Gross weight	15 kg	Volume	0,011 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

50 pieces = 1 bundle					
Lenght	4500 mm	Width	300 mm	Height	200.00 mm
Gross weight	762 kg	Volume	0,270 m³		
Min. Quantity	50.00 pcs.	Max. Quantity	50.00 pcs.		

Tender Text

Profile U 6040, continuously perforated on three sides, for creating overhead hangers and supporting structures with system components. Dimensions (approx. dimensions) U-profile : 40 x 60 x 40 mm Profile thickness t : 4 mm three-sided profile perforation, single row : 13 x 40 mm central distance : 50 mm Length L : 4500 mm Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461 NIEDAX model no. : U 6040/4500 F EP material_____ EP wage_____ Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tarif number	73089059