

Marine Cable Ladder/vertical



perforated

KLMUL 40.400 F

EAN Code: 4013339932924
 Smallest packaging unit:3 m
 quantity unit:m M



the photorealistic images are to be considered as reference images

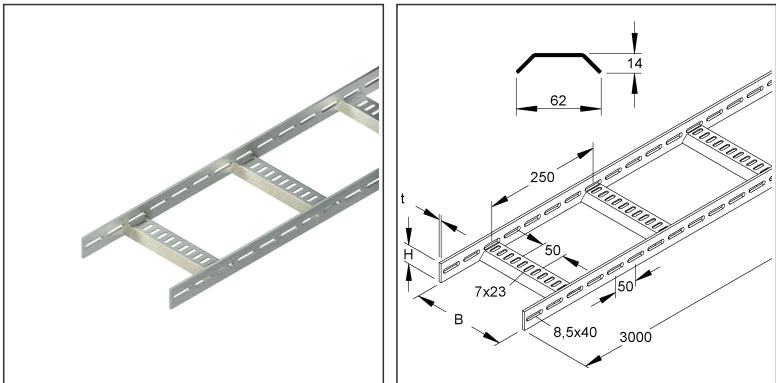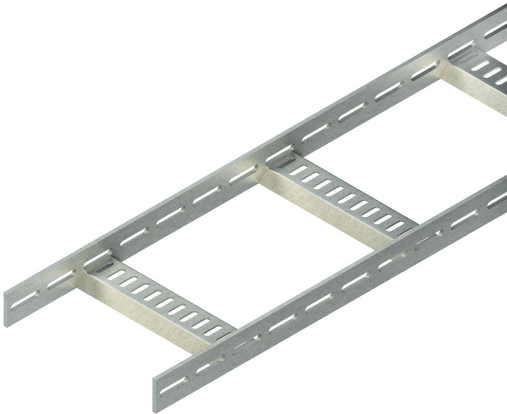

Article Description

Marine cable ladder/vertical, 40x410x3000 mm, t=5,0 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	4,590 kg / m
Weight in kg per 100	459 kg / 100m

Technical Datasheet

Cable Ladder System

KLMUL 40.400 F


the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	40.00 mm
Width	410 mm
Depth/length	3000 mm

Load Specifications

Load diagram: q = evenly distributed cable load (tested acc. to DIN EN IEC 61537)

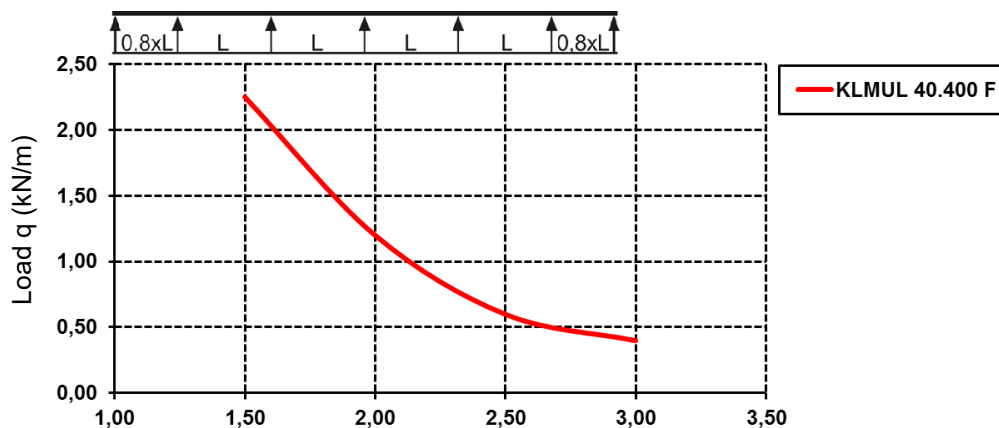

Fixing distance (m)

The load details shown in the diagram are independent of the position of the connectors.

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	410 mm	Height	40.00 mm
Gross weight	14 kg	Volume	0,049 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

120 meters = 1 rack					
Lenght	3000 mm	Width	1162 mm	Height	1120 mm
Gross weight	649 kg	Volume	3,904 m³		
Min. Quantity	120.00 m	Max. Quantity	120.00 m		

Tender Text

Marine cable ladder/ vertical, acc. to DIN EN 61537, with perforated side rails and welded-in, perforated, trapezoidal rungs.

Dimensions (approx. dimensions)

Height H x width W (inside) : 40 x 400 mm

Material thickness t : 5 mm

Rung distance : 250 mm

Rung perforation : 7 x 23 mm

Side rail perforation : 8.5 x 40 mm

Center distance : 50 mm

Delivery length : 3000 mm

Usable cross section : 10140 mm²

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : KLMUL 40.400 F

Technical Datasheet

Cable Ladder System

KLMUL 40.400 F

the photorealistic images are to be considered as reference images

Tender Text

EP Material_____ EP Wage_____
Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Federal State of Origin	RP
Customs tariff number	73089059

Related items

Connector

Model No.	Description
KLMV 40	Splice plate, height 41 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories