



Mounting Rail Type 2932

G-profile, TS 32 acc. to DIN EN 60715, unperforated

2932/2 GO

EAN Code: 4013339020904
Smallest packaging unit: 10 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

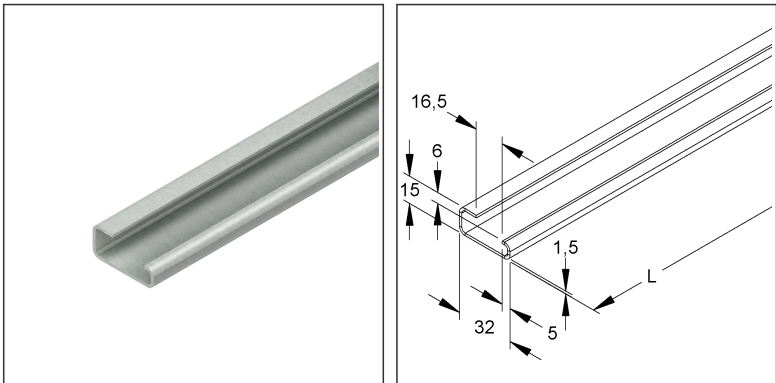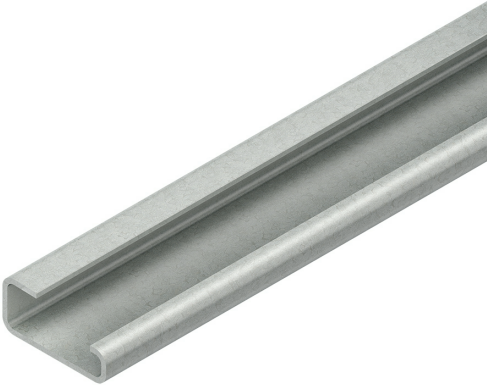

Article Description

Mounting rail, G-profile 16,5 mm, 32x15x2000 mm, unperforated, steel, galvanised acc. to DIN EN ISO 19598, thick-film passivated

Weight

Weight per quantity unit	716 g / m
Weight in kg per 100	72 kg / 100m

Physical Article Dimensions

Height	15.00 mm
Width	32.00 mm
Depth/length	2000 mm

Technical Datasheet

Niedax rails

2932/2 GO

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N04
quantity unit	m

Packing Dimension

20 meters = 1 bundle		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	2000 mm	Width	85.00 mm	Height	50.00 mm
Gross weight	14 kg	Volume	0,008 m³		
Min. quantity	20.00 m	Max. Quantity	20.00 m		

1000 meters = 1 rack					
Lenght	2000 mm	Width	850 mm	Height	770 mm
Gross weight	774 kg	Volume	1,309 m³		
Min. Quantity	1.000.00 m	Max. Quantity	1.000.00 m		

Tender Text

Mounting rail model 2932, G-rail, asymmetrical TS profile, TS 32 to DIN EN 60715, unperforated.
Used for : terminal blocks
Dimensions (approx.)
Height H x width W x material thickness t : 15 x 32 x 1.5 mm
Slot width : 16.5 mm
Delivery length L : 2000 mm
Material : steel, electro-galvanised acc. to DIN EN ISO 19598, thick-film passivated
NIEDAX Model No. : 2932/2 GO
EP Material_____ EP Wage_____
Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098