




Beam Connection Holder

with coupler

MIHK 6030 F

EAN Code: 4013339907861
Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

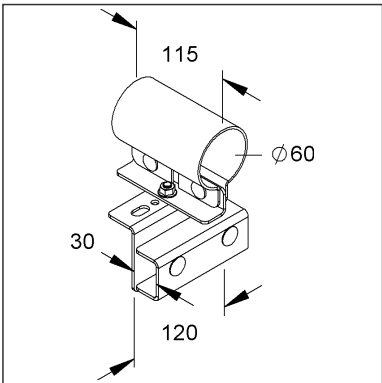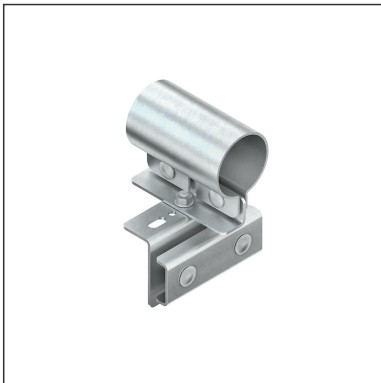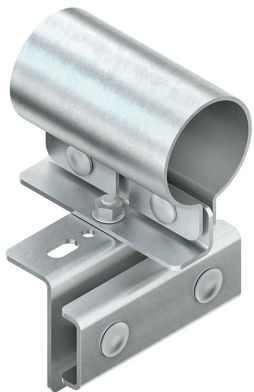

Article Description

Beam connection holder, with coupling, Ø 60 mm, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	1,485 kg / pcs.
Weight in kg per 100	148 kg / 100pcs.

Physical Article Dimensions

Height	170.40 mm
Width	115.00 mm
Depth/length	120.00 mm

Technical Datasheet

Machine installation conduit

MIHK 6030 F

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	120.00 mm	Width	115.00 mm	Height	171.00 mm
Gross weight	1,48 kg	Volume	0,002 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Beam connection holder, with coupling, for crosswise fastening of cable protection conduits to beams of the wide span cable trays and wide span cable ladders.

Used for : machine installation conduit MI 60...

machine installation conduit MIG 60...

installation conduit connection MIA 60...

on wide span cable trays WRL..., WRLM...

and wide span cable ladders WSL..., WSLM...

Dimensions (approx. dimensions)

for beam clamping width W : ≤ 30 mm

Clamping length : 120 mm

Coupling Ø : 60 mm

Coupling length : 115 mm

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : MIHK 6030 F

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73079210