

Beam Connection Holder




with round steel bracket

MIHR 3030 F

EAN Code: 4013339907144

Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

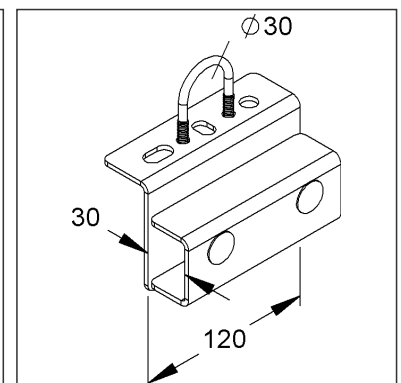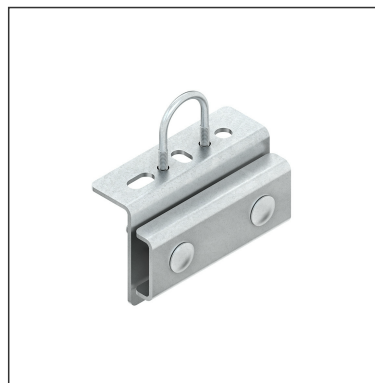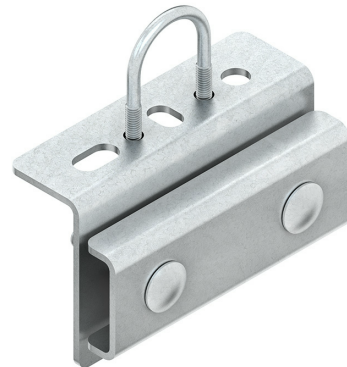

Article Description

Beam connection holder, Ø 30 mm, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	688 g / pcs.
Weight in kg per 100	69 kg / 100pcs.

Physical Article Dimensions

Height	115.00 mm
Width	75.00 mm
Depth/length	120.00 mm

Technical Datasheet

Machine installation conduit

MIHR 3030 F

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	120.00 mm	Width	75.00 mm	Height	115.00 mm
Gross weight	0,69 kg	Volume	0,001 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Beam connection bracket, with round steel clamp, for crosswise fastening of cable protection conduits to beams of wide span cable trays and wide span cable ladders.

Used for : machine installation conduit MI 30...

on wide span cable trays WRL..., WRLM...

and wide span cable ladders WSL..., WSLM...

Dimensions (approx. dimensions)

for beam clamping width W : ≤ 30 mm

Clamping length : 120 mm

Round steel clamp $\varnothing$: 30 mm

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : MIHR 3030 F

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73079210