

Beam Connection Holder



with round steel bracket

MIHR 60 F

EAN Code: 4013339907885

Smallest packaging unit:1 pc.

the photorealistic images are to be considered as reference images

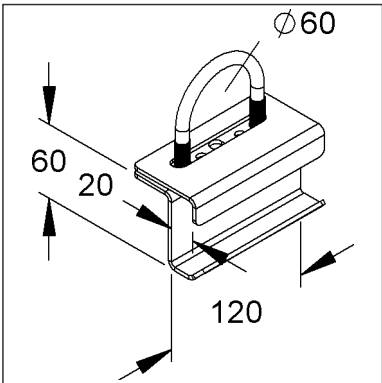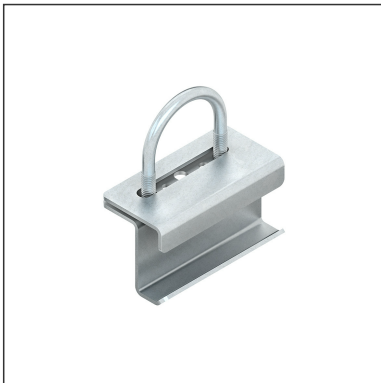

Article Description

Beam connection holder, Ø 60 mm, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	674 g / pcs.
Weight in kg per 100	67 kg / 100pcs.

Physical Article Dimensions

Height	126.00 mm
Width	62.50 mm
Depth/length	120.00 mm

Technical Datasheet

Machine installation conduit

MIHR 60 F

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	120.00 mm	Width	63.00 mm	Height	126.00 mm
Gross weight	0,67 kg	Volume	0,001 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Beam connection bracket, with round steel clamp, for crosswise fastening of cable protection conduits to the beams of Allround cable ladders.
Used for : machine installation conduit MI 60...
machine installation conduit MIG 60...
installation conduit connection MIA 60...
on Allround cable ladders KRC... / KRO...
Dimensions (approx. dimensions)
for cable ladder beams H x W : 60 x 20 mm
Clamping length : 120 mm
Round steel clamp-Ø : 60 mm
Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461
NIEDAX Model No. : MIHR 60 F
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73079210