



Wall Bracket

with adjustment range $+25^{\circ}$ to -60°

KTVW 650 F

EAN Code: 4013339086986
Smallest packaging unit: 10 pcs.

the photorealistic images are to be considered as reference images

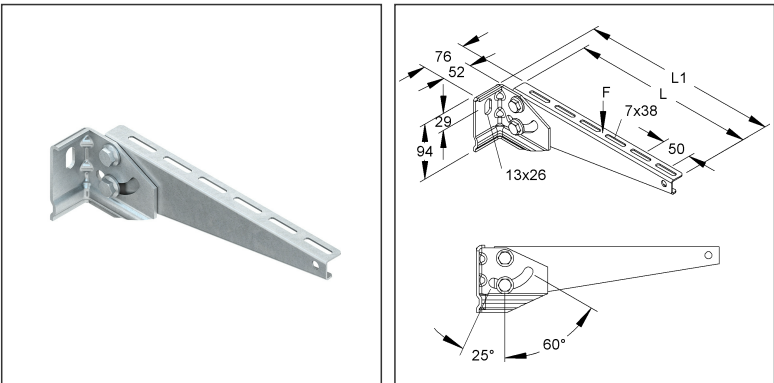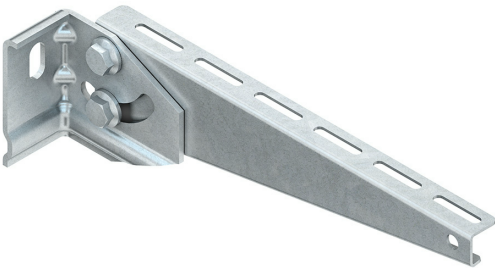

Article Description

Wall bracket, 90x665 mm, with adjustment range $+25^{\circ}$ to -60° , steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Incl. accessories

2 FLM 6X12 F

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	1,859 kg / pcs.
Weight in kg per 100	186 kg / 100pcs.

Technical Datasheet

Supporting structure

KTVW 650 F

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	94.00 mm
Width	76.00 mm
Depth/length	690 mm

Packing Dimension

10 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	730 mm	Width	200.00 mm	Height	150.00 mm
Gross weight	19 kg	Volume	0,022 m³		
Min. quantity	10.00 pcs.	Max. Quantity	10.00 pcs.		

110 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	254 kg	Volume	0,411 m³		
Min. Quantity	110.00 pcs.	Max. Quantity	110.00 pcs.		

Tender Text

Wall bracket, adjustable, adjustment range +25° to -60°, for fastening to sloping walls, e.g. in the area of concrete pipes and tunnels, including proportional fastening accessories in hot-dip galvanised. The load-bearing capacity specifications are only valid if there is sufficient anchoring to the load-bearing substrate and a maximum tightening torque of 123 Nm applied to the screws. Please note: The bracket to be used, when the bracket connection angle is inclined up to 60°, depends on the height available to the sloping ceiling/wall and the required width of the cable tray.

Dimensions (approx. dimensions)

Support height H : 94 mm

Width of the connection angle W : 52 mm

Total width W1 : 76 mm

Support length L : 665 mm

Total length L1 : 690 mm

Load capacity F at L/2 : 0.9 kN tested in the system

Material bracket : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : KTVW 650 F

EP Material_____ EP Lohn_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059