



Wall Bracket

with adjustment range +25° to -60°

KTVW 700 F

EAN Code: 4013339086993
Smallest packaging unit:1 pc.

the photorealistic images are to be considered as reference images

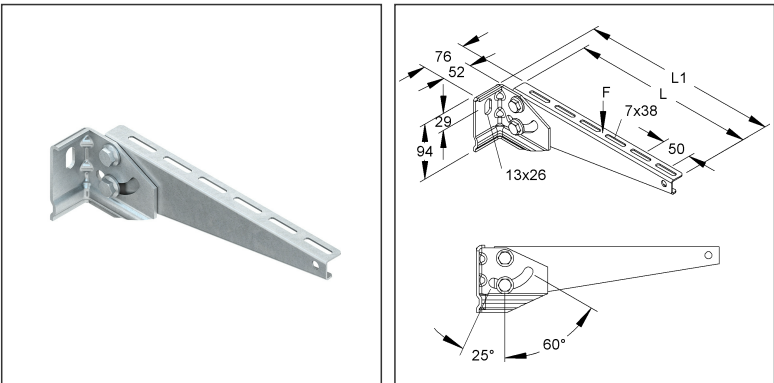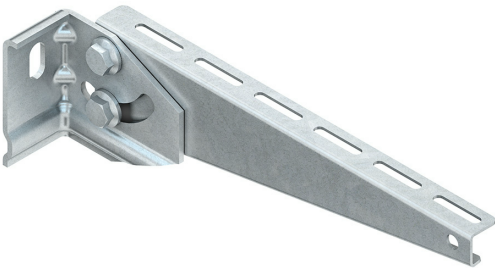

Article Description

Wall bracket, 90x715 mm, with adjustment range +25° to -60°, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Incl. accessories

1 piece = 1 piece		✓ lowest delivery unit	✓ preferred delivery unit
Model No.	Description	quantity	
FLM 6X12 F	Mushroom-head bolt M6, similar DIN 603, length 12 mm, steel, hot dip galvanised DIN EN ISO 1461	2 pcs.	

Additional Price Information

Article group	N13
quantity unit	pcs.

Technical Datasheet

Supporting structure

KTVW 700 F

the photorealistic images are to be considered as reference images

Weight

Weight per quantity unit	1,960 kg / pcs.
Weight in kg per 100	196 kg / 100pcs.

Physical Article Dimensions

Height	94.00 mm
Width	76.00 mm
Depth/length	740 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	740 mm	Width	76.00 mm	Height	94.00 mm
Gross weight	1,96 kg	Volume	0,005 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Wall bracket, adjustable, adjustment range +25° to -60°, for fastening to sloping walls, e.g. in the area of concrete pipes and tunnels, including proportional fastening accessories in hot-dip galvanised. The load-bearing capacity specifications are only valid if there is sufficient anchoring to the load-bearing substrate and a maximum tightening torque of 123 Nm applied to the screws. Please note: The bracket to be used, when the bracket connection angle is inclined up to 60°, depends on the height available to the sloping ceiling/wall and the required width of the cable tray.

Dimensions (approx. dimensions)

Support height H : 94 mm

Width of the connection angle B : 52 mm

Total width B1 : 76 mm

Support length L : 715 mm

Total length L1 : 740 mm

Load capacity F at L/2 : 0.8 kN tested in the system

Material bracket : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : KTVW 700 F

EP Material_____ EP Lohn_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059