

Wall Bracket



heavy duty design

KTASS 500

EAN Code: 4013339189243

Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

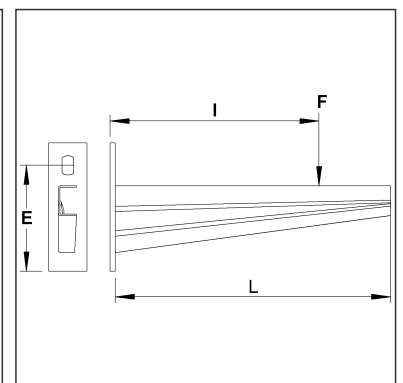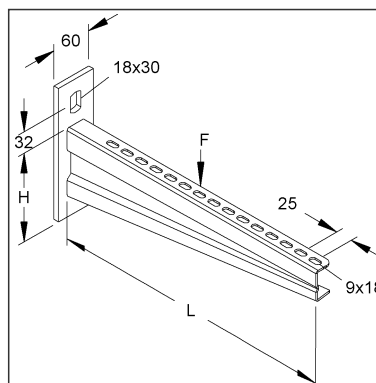

$$F = \sqrt{\frac{R^2}{1 + (I/E)^2}}$$

Article Description

Wall bracket, heavy duty, 133x530 mm, 10,0 kN, steel, hot dip galvanised DIN EN ISO 1461

Technical Datasheet

Supporting structure

KTASS 500

the photorealistic images are to be considered as reference images

Excl. Accessories

exclusive bolting	Please order the necessary fastening accessories separately for F: for cable trays: FLM 6X12 F for cable ladders: KLTB 6 F, UGM 6 F for wide span cable ladders: WSTB 2 for wide span cable trays: FLM 8X16 F
-------------------	---

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	2,256 kg/ pcs.
Weight in kg per 100	226 kg/ 100pcs.

Physical Article Dimensions

Height	200.00 mm
Width	60.00 mm
Depth/length	538 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	538 mm	Width	60.00 mm	Height	200.00 mm
Gross weight	2,26 kg	Volume	0,006 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		
150 pieces = 1					
Lenght	1230 mm	Width	840 mm	Height	970 mm
Gross weight	408 kg	Volume	1,002 m³		
Min. Quantity	150.00 pcs.	Max. Quantity	150.00 pcs.		

Tender Text

Wall bracket, very heavy duty, for wall mounting, please order the required fastening accessories for cable trays/ladders and wide span cable trays/ladders separately. The load-bearing capacity data are only valid if the anchor is sufficiently anchored to the load-bearing substrate (min. concrete C20/25) and the anchor DAZ 16x25 is used in uncracked concrete, taking into account the approval certificate ETA-18/0542. In any case, the introduction of loads into the structure must be agreed with the construction planning or site management.

Dimensions (approx. dimensions)

Support height H : 133 mm

Support length L : 530 mm

Load capacity F at L/2 : 10 kN tested in the system, applies to the bracket independently of the anchoring.

Load capacity F2 at L/2 : 9.5 kN tested in the system, applies to central load introduction and in connection with dowel DAZ 16x25. In case of different load

Technical Datasheet

Supporting structure

KTASS 500

the photorealistic images are to be considered as reference images

Tender Text

introduction (asymmetrical load introduction) a formula for calculating the load capacity is to be used - please contact us if required.
Material bracket : Steel, hot-dip galvanised acc. to DIN EN ISO 1461
NIEDAX Model No. : KTASS 500
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Federal State of Origin	RP
Customs tariff number	73089059