



Wall Bracket

standard

KTA 200

EAN Code: 4013339187102
Smallest packaging unit: 20 pcs.

the photorealistic images are to be considered as reference images

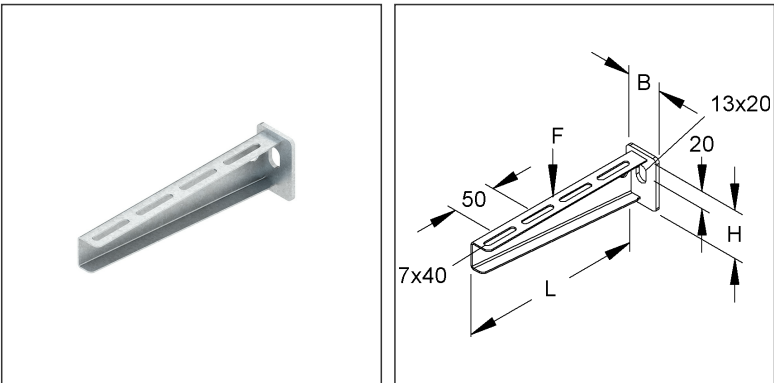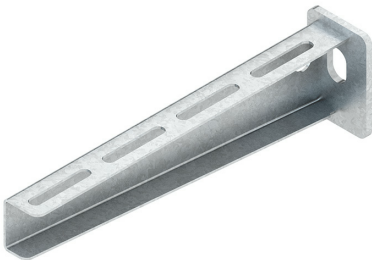

Article Description

Overhead hanger- and wall bracket, standard, 55x210 mm, 2,5 kN, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Incl. accessories

2 FLM 6X12

Excl. Accessories

exclusive bolting	Please order the necessary fastening accessories separately: for cable trays KK... and KP...: 2 FKM 6X20 E4 for cable ladders UL...: 2 ULKG, 2 BKM 6X30 E4, 2 UGM 6 E5 alternative 2 HSK 10 E5, 2 BKM 6X30 E4, 2 UGM 6 E5
-------------------	--

Additional Price Information

Article group	N13
quantity unit	pcs.

Technical Datasheet

Supporting structure

KTA 200

the photorealistic images are to be considered as reference images

Weight

Weight per quantity unit	274 g / pcs.
Weight in kg per 100	27 kg / 100pcs.

Physical Article Dimensions

Height	60.00 mm
Width	40.00 mm
Depth/length	214 mm

Packing Dimension

20 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	260 mm	Width	185.00 mm	Height	120.00 mm
Gross weight	5,77 kg	Volume	0,006 m³		
Min. quantity	20.00 pcs.	Max. Quantity	20.00 pcs.		

720 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	248 kg	Volume	0,411 m³		
Min. Quantity	720.00 pcs.	Max. Quantity	720.00 pcs.		

Tender Text

Overhead hanger and wall bracket, standard, for wall and overhead hanger mounting, including proportional fastening accessories in hot-dip galvanised. The load-bearing capacity data is only valid if anchored sufficiently to the load-bearing substrate or if mounted on hanging poles in accordance with the regulations.

Please observe additional regulations for use in functional maintenance or for suspended ceilings with fire protection requirements (MLAR 2/2015 sample cable system guideline)! The use of the KTA... in functional maintenance is only suitable in connection with KAWG 12!

VDE certified!

Dimensions (approx. dimensions)

Support height H : 55 mm

Support length L : 210 mm

Load capacity F at L/2 : 2.5 kN tested in the system

Material of the bracket : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : KTA 200

EP material_____ EP wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Supporting structure

KTA 200

the photorealistic images are to be considered as reference images

Origin & International Trade	
Country of origin	DE
Customs tarif number	73089059