



Wall Bracket

standard

KTA 400

EAN Code: 4013339187508
 Smallest packaging unit:20 pcs.

the photorealistic images are to be considered as reference images

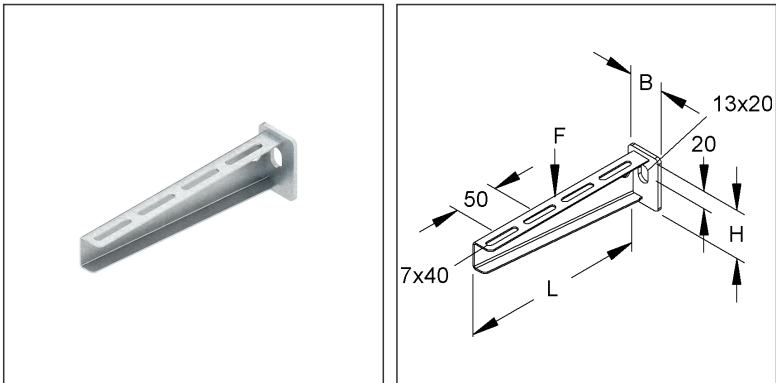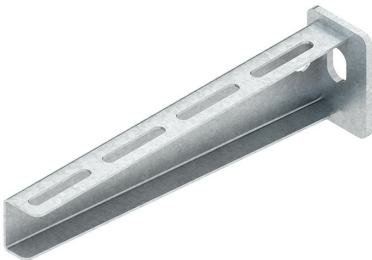

Article Description

Overhead hanger- and wall bracket, standard, 75x410 mm, 2,5 kN, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Incl. accessories

2 FLM 6X12

Excl. Accessories

exclusive bolting	Please order the necessary fastening accessories separately: for cable trays KK... and KP...: 2 FKM 6X20 E4 for cable ladders UL...: 2 ULKG, 2 BKM 6X30 E4, 2 UGM 6 E5 alternative 2 HSK 10 E5, 2 BKM 6X30 E4, 2 UGM 6 E5
-------------------	--

Additional Price Information

Article group	N13
quantity unit	pcs.

Technical Datasheet

Supporting structure

KTA 400

the photorealistic images are to be considered as reference images

Weight

Weight per quantity unit	791 g / pcs.
Weight in kg per 100	79 kg / 100pcs.

Physical Article Dimensions

Height	80.00 mm
Width	50.00 mm
Depth/length	416 mm

Packing Dimension

20 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	480 mm	Width	280 mm	Height	140.00 mm
Gross weight	17 kg	Volume	0,019 m³		
Min. quantity	20.00 pcs.	Max. Quantity	20.00 pcs.		

240 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	240 kg	Volume	0,411 m³		
Min. Quantity	240.00 pcs.	Max. Quantity	240.00 pcs.		

Tender Text

Overhead hanger and wall bracket, standard, for wall and overhead hanger mounting, including proportional fastening accessories in hot-dip galvanised. The load-bearing capacity data is only valid if anchored sufficiently to the load-bearing substrate or if mounted on hanging poles in accordance with the regulations.

Please observe additional regulations for use in functional maintenance or for suspended ceilings with fire protection requirements (MLAR 2/2015 sample cable system guideline)! The use of the KTA... in functional maintenance is only suitable in connection with KAWG 12!

VDE certified!

Dimensions (approx. dimensions)

Support height H : 75 mm

Support length L : 410 mm

Load capacity F at L/2 : 2.5 kN tested in the system

Material of the bracket : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : KTA 400

EP material_____ EP wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Supporting structure

KTA 400

the photorealistic images are to be considered as reference images

Origin & International Trade	
Country of origin	DE
Customs tarif number	73089059