



Wall Bracket

standard

KTA 500

EAN Code: 4013339187706
 Smallest packaging unit:10 pcs.

the photorealistic images are to be considered as reference images

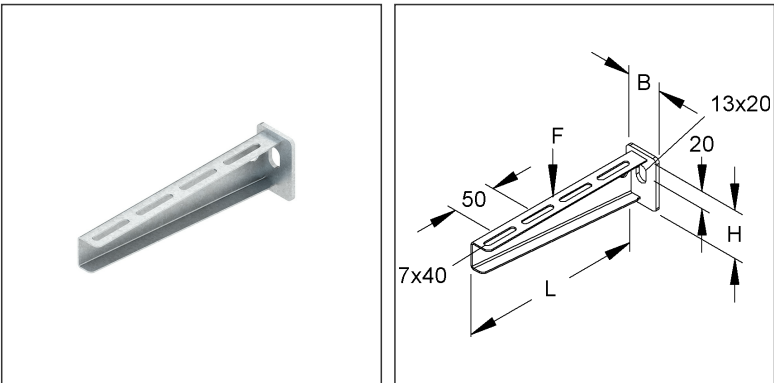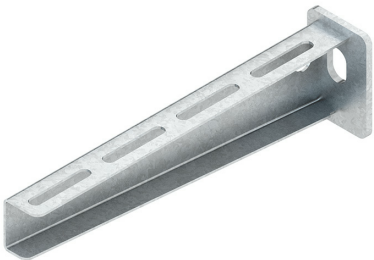

Article Description

Overhead hanger- and wall bracket, standard, 90x510 mm, 2,5 kN, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Incl. accessories

2 FLM 6X12

Excl. Accessories

exclusive bolting	Please order the necessary fastening accessories separately: for cable trays KK... and KP...: 2 FKM 6X20 E4 for cable ladders UL...: 2 ULKG, 2 BKM 6X30 E4, 2 UGM 6 E5 alternative 2 HSK 10 E5, 2 BKM 6X30 E4, 2 UGM 6 E5
-------------------	--

Additional Price Information

Article group	N13
quantity unit	pcs.

Technical Datasheet

Supporting structure

KTA 500

the photorealistic images are to be considered as reference images

Weight

Weight per quantity unit	1,111 kg/ pcs.
Weight in kg per 100	111 kg/ 100pcs.

Physical Article Dimensions

Height	95.00 mm
Width	50.00 mm
Depth/length	516 mm

Packing Dimension

10 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	550 mm	Width	185.00 mm	Height	140.00 mm
Gross weight	12 kg	Volume	0,014 m³		
Min. quantity	10.00 pcs.	Max. Quantity	10.00 pcs.		

170 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	239 kg	Volume	0,411 m³		
Min. Quantity	170.00 pcs.	Max. Quantity	170.00 pcs.		

Tender Text

Overhead hanger and wall bracket, standard, for wall and overhead hanger mounting, including proportional fastening accessories in hot-dip galvanised. The load-bearing capacity data is only valid if anchored sufficiently to the load-bearing substrate or if mounted on hanging poles in accordance with the regulations.

Please observe additional regulations for use in functional maintenance or for suspended ceilings with fire protection requirements (MLAR 2/2015 sample cable system guideline)!

VDE certified!

Dimensions (approx. dimensions)

Support height H : 90 mm

Support length L : 510 mm

Load capacity F at L/2 : 2.5 kN tested in the system

Material of the bracket : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : KTA 500

EP material_____ EP wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Supporting structure

KTA 500

the photorealistic images are to be considered as reference images

Origin & International Trade

Country of origin	DE
Federal State of Origin	RP
Customs tariff number	73089059