




Overhead Hanger- and Wall Bracket

standard

KTA 100

EAN Code: 4013339186907
Smallest packaging unit:20 pcs.

the photorealistic images are to be considered as reference images

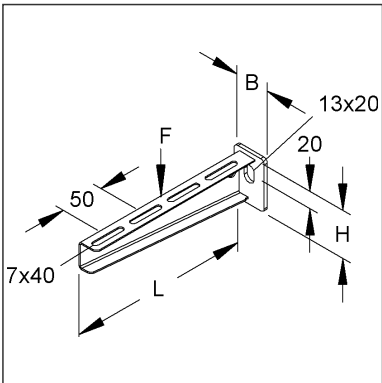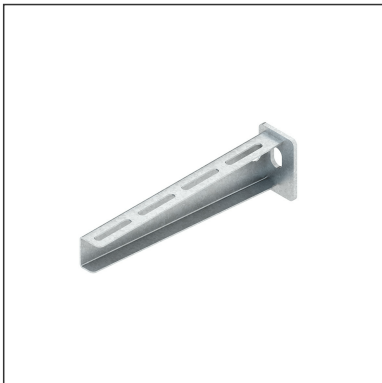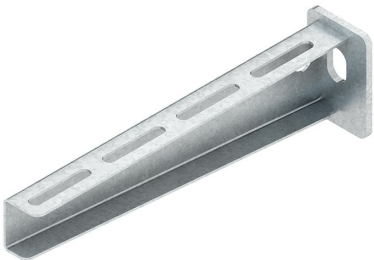

Article Description

Overhead hanger- and wall bracket, standard, 45x110 mm, 2,5 kN, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Incl. accessories

2 FLM 6X12

Excl. Accessories

exclusive bolting

Please order the necessary fastening accessories separately:
for cable trays KK... and KP...: 2 FKM 6X20 E4
for cable ladders UL...: 2 ULKG, 2 BKM 6X30 E4, 2 UGM 6 E5
alternative 2 HSK 10 E5, 2 BKM 6X30 E4, 2 UGM 6 E5

Additional Price Information

Article group
quantity unit

N13
pcs.

Technical Datasheet

Supporting structure

KTA 100

the photorealistic images are to be considered as reference images

Weight

Weight per quantity unit	156 g / pcs.
Weight in kg per 100	16 kg / 100pcs.

Physical Article Dimensions

Height	50.00 mm
Width	40.00 mm
Depth/length	114.00 mm

Packing Dimension

20 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	210 mm	Width	150.00 mm	Height	100.00 mm
Gross weight	3,29 kg	Volume	0,003 m³		
Min. quantity	20.00 pcs.	Max. Quantity	20.00 pcs.		

1000 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	205 kg	Volume	0,411 m³		
Min. Quantity	1.000.00 pcs.	Max. Quantity	1.000.00 pcs.		

Tender Text

Overhead hanger and wall bracket, standard, for wall and overhead hanger mounting, including proportional fastening accessories in hot-dip galvanised. The load-bearing capacity data only apply if the bracket is sufficiently anchored to the load-bearing underground or if it is mounted on overhead hangers in accordance with regulations.

Please observe additional regulations for use in functional maintenance or for suspended ceilings with fire protection requirements (MLAR 2/2015 sample cable system guideline)!

VDE certified!

Dimensions (approx. dimensions)

Support height H : 45 mm

Support length L : 110 mm

Load capacity F at L/2 : 2.5 kN tested in the system

Material of the bracket : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : KTA 100

EP material_____ EP wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Supporting structure

KTA 100

the photorealistic images are to be considered as reference images

Origin & International Trade	
Country of origin	DE
Customs tarif number	73089059