



Ceiling Support

W-shaped, galvanised wire according to DIN EN 10244-2

DT 50.300 DV

EAN Code: 4013339088454
 Smallest packaging unit:2 m
 quantity unit:m M

the photorealistic images are to be considered as reference images

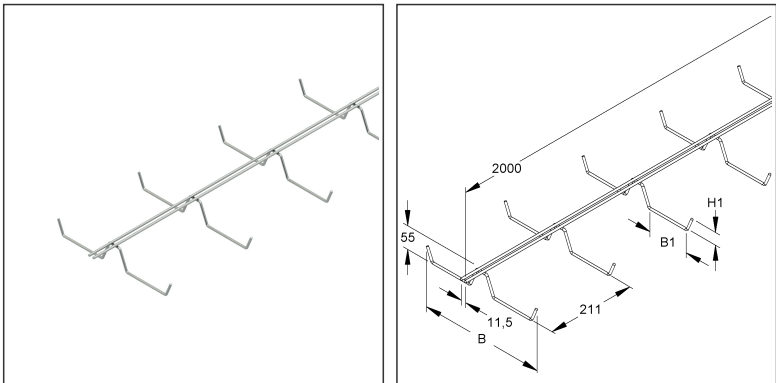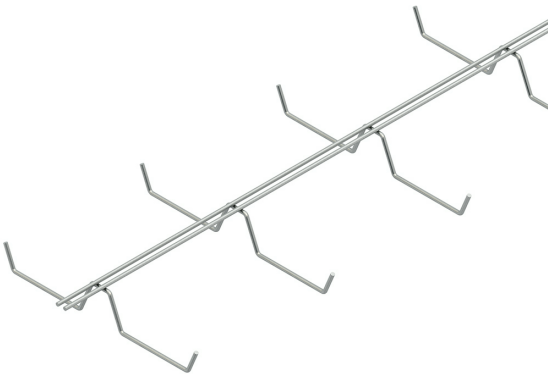

Article Description

Ceiling support, W-shaped, 50x300x2000 mm, wire-Ø 5,0 mm, steel, wire galvanised according to DIN EN 10244-2

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	612 g/ m
Weight in kg per 100	61 kg/ 100m

Technical Datasheet

Wire Mesh Tray System

DT 50.300 DV


the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	55.00 mm
Width	300 mm
Depth/length	2000 mm

Load Specifications

Load diagram: q = evenly distributed cable load (tested acc. to DIN EN IEC 61537)

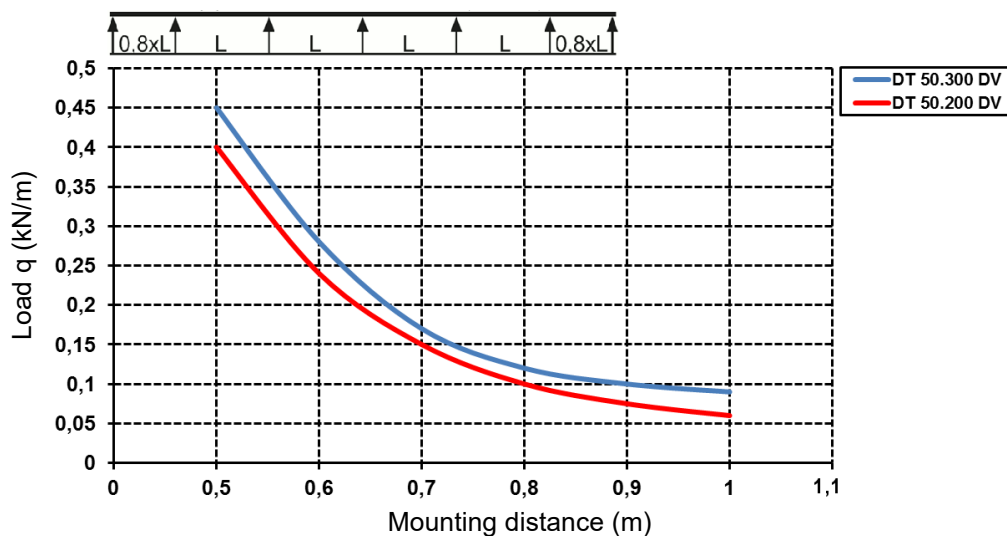

Packing Dimension

2 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	2000 mm	Width	300 mm	Height	55.00 mm
Gross weight	1,22 kg	Volume	0,033 m³		
Min. quantity	2.00 m	Max. Quantity	2.00 m		

800 meters = 1 rack					
Lenght	2000 mm	Width	1162 mm	Height	1120 mm
Gross weight	587 kg	Volume	2,603 m³		
Min. Quantity	800.00 m	Max. Quantity	800.00 m		

Tender Text

Ceiling support acc. to DIN EN IEC 61537, W-shaped, made of steel wires for suspended ceiling constructions and/or for direct fastening to the ceiling, please order three-part universal splice plate GRV M6X20 V separately. For use for suspended ceilings with fire protection requirements (sample wiring system guideline MLAR 2/2015) please observe additional regulations!

Please observe additional regulations for use in functional maintenance!

Dimensions (approx. dimensions)

Nominal dimensions height H (outside) x width W (outside) : 55 x 200 mm

Longitudinal wire Ø : 5 mm

Longitudinal wire Ø : 11.5 mm

Cross wire Ø : 5 mm

Cross wire spacing : 211 mm

Technical Datasheet

Wire Mesh Tray System

DT 50.300 DV

the photorealistic images are to be considered as reference images

Tender Text

Delivery length L : 2000 mm
Usable cross section : 5280 mm²
Suitable connectors : GRV M6X20 V
Material : Steel, wire galvanised acc. to DIN EN 10244-2
NIEDAX Model no. : DT 50.300 DV
EP Material_____ EP Wage_____
Unit price/metre

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73143100

Related items

Connector

Model No.	Description
GRV M6X20 V	Universal-splice plate, three-part, with toothed flange, steel, electro galvanised according DIN EN ISO 2081, blue passivated