


Support

C-profile

2988/810 V W

EAN Code: 4013339464067
Smallest packaging unit:1 pc.

the photorealistic images are to be considered as reference images

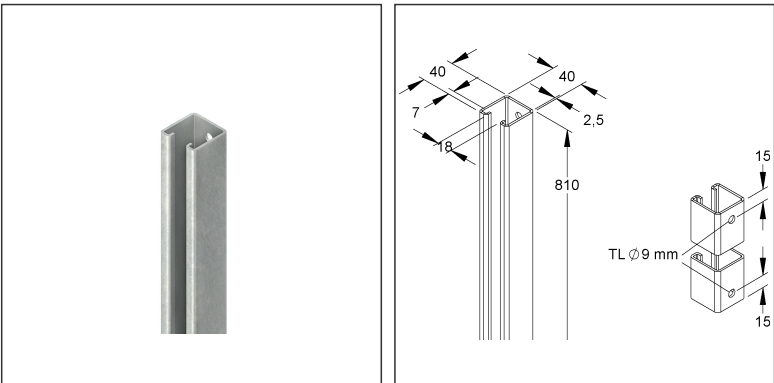

Article Description

Support, C-profile, slot width 18 mm, 40x40x810 mm, immersion hole, steel, electro galvanised according to DIN EN ISO 2081, RAL 9016

Additional Price Information

Article group	N17
quantity unit	pcs.

Weight

Weight per quantity unit	2,219 kg / pcs.
Weight in kg per 100	222 kg / 100pcs.

Technical Datasheet

Device trunking system

2988/810 V W

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	40.00 mm
Width	40.00 mm
Depth/length	810 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	810 mm	Width	40.00 mm	Height	40.00 mm
Gross weight	2,22 kg	Volume	0,001 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Floor support, made of C-profile 2988, visible surfaces electrostatically powder-coated, with central immersion holes on both sides to the profile ends, together with the support fastening set GSB 88 for supporting the device trunking in areas where fastening to the sill is not possible.

Dimensions (approx. dimensions)

Height H x width W : 40 x 40 mm

Material thickness t : 2.5 mm

Slot width : 18 mm

Delivery length L : 810 mm

Immersion hole : Ø 9 mm

Distance to profile end : 15 mm

Standard support distance : ≤ 600 mm

for sill height : 850 mm ± 20 mm

Colour : cream white

RAL : 9001 (similar)

Material : Steel, electro galvanised acc. to DIN EN ISO 19598, blue passivated

NIEDAX Model No. : 2988/810 V W

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	21.01.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059