

Beam Connection Holder




with coupler

MIHK 30 E3

EAN Code: 4013339908400
Smallest packaging unit: 1 pc.



the photorealistic images are to be considered as reference images

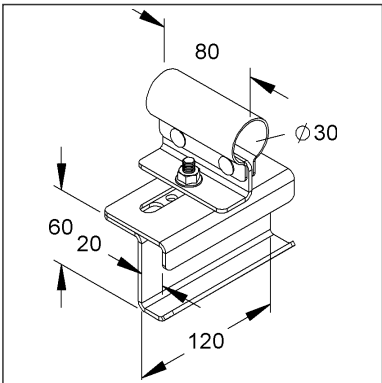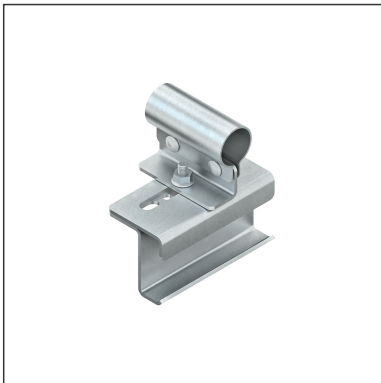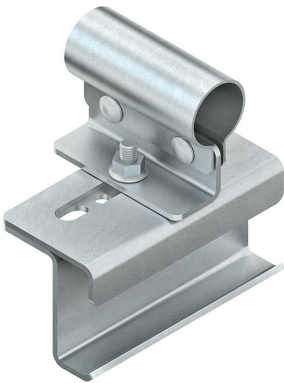

Article Description

Beam connection holder, with coupling, Ø 30 mm, stainless steel, material code: 1.4301, AISI 304

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	766 g / pcs.
Weight in kg per 100	77 kg / 100pcs.

Physical Article Dimensions

Height	126.20 mm
Width	80.00 mm
Depth/length	120.00 mm

Technical Datasheet

Machine installation conduit

MIHK 30 E3

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	120.00 mm	Width	80.00 mm	Height	127.00 mm
Gross weight	0,77 kg	Volume	0,001 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Beam connection holder, with coupling, for crosswise attachment of cable protection conduits to the beams of Allround cable ladders.

Used for : machine installation conduit MI 30...

on Allround cable ladders KRC... / KRO...

Dimensions (approx. dimensions)

for cable ladder beams H x W : 60 x 20 mm

Clamping length : 120 mm

Coupling Ø : 30 mm

Coupling length : 80 mm

Material : stainless steel, material no. 1.4301, AISI 304

NIEDAX Model no. : MIHK 30 E3

EP Material_____ EP Lohn_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73072210