




Beam Connection Holder

with coupler

MIHK 60 E3

EAN Code: 4013339908882
Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

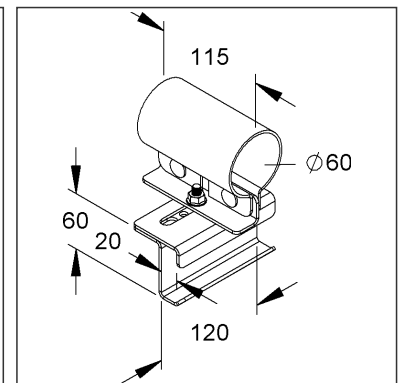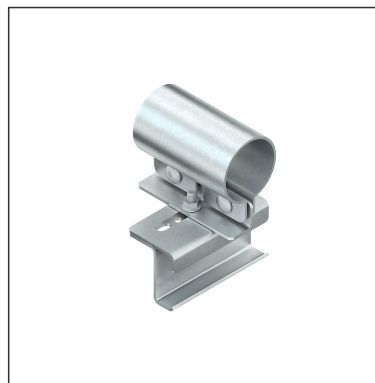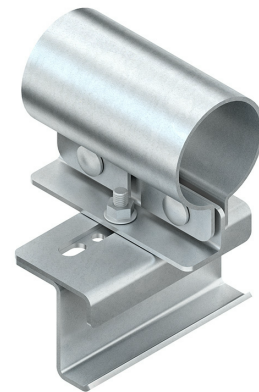

Article Description

Beam connection holder, with coupling, Ø 60 mm, stainless steel, material code: 1.4301, AISI 304

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	1,248 kg / pcs.
Weight in kg per 100	125 kg / 100pcs.

Physical Article Dimensions

Height	159.40 mm
Width	115.00 mm
Depth/length	120.00 mm

Technical Datasheet

Machine installation conduit

MIHK 60 E3

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	120.00 mm	Width	115.00 mm	Height	160.00 mm
Gross weight	1,25 kg	Volume	0,002 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Beam connection holder, with coupling, for crosswise attachment of cable protection conduits to the beams of Allround cable ladders.

Used for : machine installation conduit MI 60...

machine installation conduit MIG 60...

installation conduit connection MIA 60...

on Allround cable ladders KRC... / KRO...

Dimensions (approx. dimensions)

for cable ladder beams H x W : 60 x 20 mm

Clamping length : 120 mm

Coupling Ø : 60 mm

Coupling length : 115 mm

Material : stainless steel, material no. 1.4301, AISI 304

NIEDAX Model no. : MIHK 60 E3

EP Material_____ EP Lohn_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73072210