


Slotted Pan Head Bolt, acc. to DIN EN 1580

FK 6X12

EAN Code: 4013339207053
Smallest packaging unit: 25 pcs.

the photorealistic images are to be considered as reference images

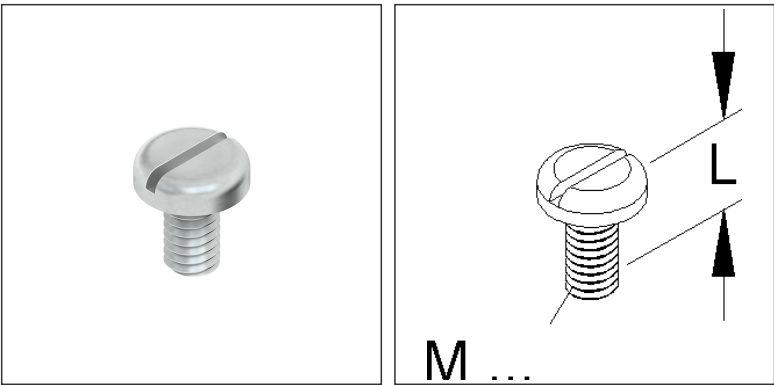

Article Description

Flat head bolt M6, DIN EN ISO 1580, steel, electro galvanised according to DIN EN ISO 2081/4042, blue pass

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	6 g / pcs.
Weight in kg per 100	0,52 kg / 100pcs.

Physical Article Dimensions

Height	12.00 mm
Width	12.00 mm
Depth/length	15.60 mm

Technical Datasheet

Screws and nuts

FK 6X12

the photorealistic images are to be considered as reference images

Packing Dimension

25 pieces = 1		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	106.00 mm	Width	91.00 mm	Height	52.00 mm
Gross weight	0,15 kg	Volume	0,001 m³		
Min. quantity	25.00 pcs.	Max. Quantity	25.00 pcs.		

100 pieces = 1					
Lenght	120.00 mm	Width	80.00 mm	Height	140.00 mm
Gross weight	0,64 kg	Volume	0,001 m³		
Min. Quantity	100.00 pcs.	Max. Quantity	100.00 pcs.		

1000 pieces = 1 covering box					
Lenght	281 mm	Width	186.00 mm	Height	110.00 mm
Gross weight	6,51 kg	Volume	0,006 m³		
Min. Quantity	1.000.00 pcs.	Max. Quantity	1.000.00 pcs.		

Tender Text

Flat head screw with slot acc. to DIN EN ISO 1580, for fastening the perforated cable trays to the profile 2970 with the inclined sliding nut GSF 0406.
Suitable for :
Barrier strip fastening clamp KLWC 11
Cable ladder end outlet plate KLAB ... Separator fastening clamp KLWC 16
wide span cable ladder end outlet plate WLAB ...
Dimensions (approx. dimensions) L : 12 mm
Thread : M 6
Material : Steel, zinc plated acc. to DIN EN ISO 4042, blue passivated.
NIEDAX Model-No. : FK 6X12
EP Material_____ EP Lohn_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	
Customs tariff number	73181558