

Central Suspension





C-shaped

ZC 100 S

EAN Code: 4013339192076

Smallest packaging unit: 10 pcs.

the photorealistic images are to be considered as reference images

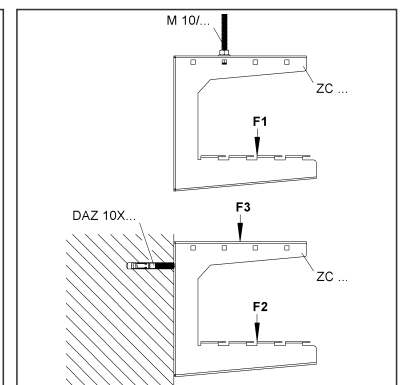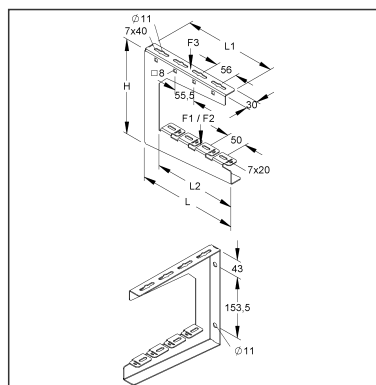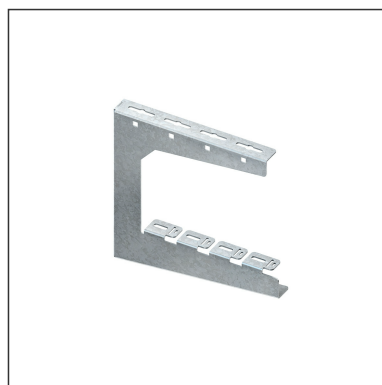

Article Description

Central suspension, C-profile, 133x110mm, 0,9 kN, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	402 g / pcs.
Weight in kg per 100	40 kg / 100pcs.

Physical Article Dimensions

Height	240 mm
Width	150.00 mm
Depth/length	30.00 mm

Technical Datasheet

Supporting structure

ZC 100 S

the photorealistic images are to be considered as reference images

Packing Dimension

10 pieces = 1 carton		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	350 mm	Width	180.00 mm	Height	110.00 mm
Gross weight	4,34 kg	Volume	0,007 m³		
Min. quantity	10.00 pcs.	Max. Quantity	10.00 pcs.		

320 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	179 kg	Volume	0,411 m³		
Min. Quantity	320.00 pcs.	Max. Quantity	320.00 pcs.		

Tender Text

Central suspension, C-shaped, bracket for ceiling mounting by means of threaded rod M 10/... as well as for wall mounting. The load-bearing capacity specifications are only valid with sufficient anchoring to the load-bearing substrate.

Used for : Wire mesh trays with a wire Ø 3.9 - 6 mm and a central longitudinal wire spacing of 50 mm as well as for cable trays

Dimensions (approx. dimensions)

Height H (outer dimension) : 240 mm

Width B (outer dimension) : 30 mm

Length L (outer dimension) : 150 mm

Material thickness t : 1.5 mm

upper support length L1 : 133 mm

Fixing perforation of the upper support surface : 7 x 40 mm and Ø 11 mm

central spacing of the fixing perforation : 52 mm

vertical square perforation : □ 8 mm

central spacing of the square perforation : 55.5 mm

lower support length L2 : 110 mm

Fixing slotted perforation of the lower support surface : 7 x 20 mm

Accommodation of Wire mesh trays with a longitudinal wire spacing : 50 mm and a wire Ø 3.9 - 6 mm

Ceiling suspension by means of threaded rod M 10/... Load capacity F1 at L2/2 : 0.9 kN

Wall fixing by means of push-through anchor DAZ 10X... Load capacity F2 at L2/2 : 1.5 kN

Wall fixing by means of push-through anchor DAZ 10X... Load capacity F3 at L1/2 : 1.5 kN

Material : Steel, pre-galvanised according to DIN EN 10346

NIEDAX Model no. : ZC 100 S

EP Material _____ EP Wage _____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet
Supporting structure

ZC 100 S

the photorealistic images are to be considered as reference images

Origin & International Trade	
Country of origin	DE
Customs tariff number	73089059