



Wire Mesh Tray

U-shaped, spot-welded from steel wires, with welded connector

MTC 54.300 F NX**CITO**Line

EAN Code: 4013339712113
 Smallest packaging unit:3 m
 quantity unit:m M

the photorealistic images are to be considered as reference images

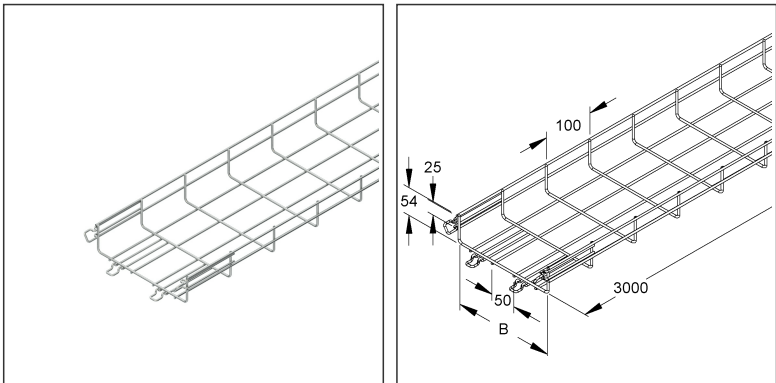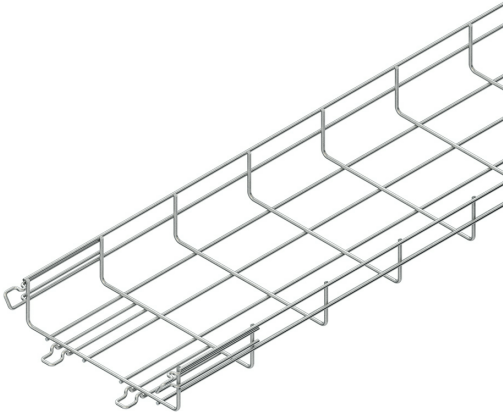

Article Description

Wire mesh tray, U-shaped, w. welded connector, 54x300x3000 mm, CITO, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	2,233 kg / m
Weight in kg per 100	223 kg / 100m

Technical Datasheet

Wire Mesh Tray System

MTC 54.300 F nx **CITO**Line


the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	60.52 mm
Width	318.70 mm
Depth/length	3032 mm

Load Specifications

Load diagram: q = evenly distributed cable load (tested acc. to DIN EN IEC 61537)

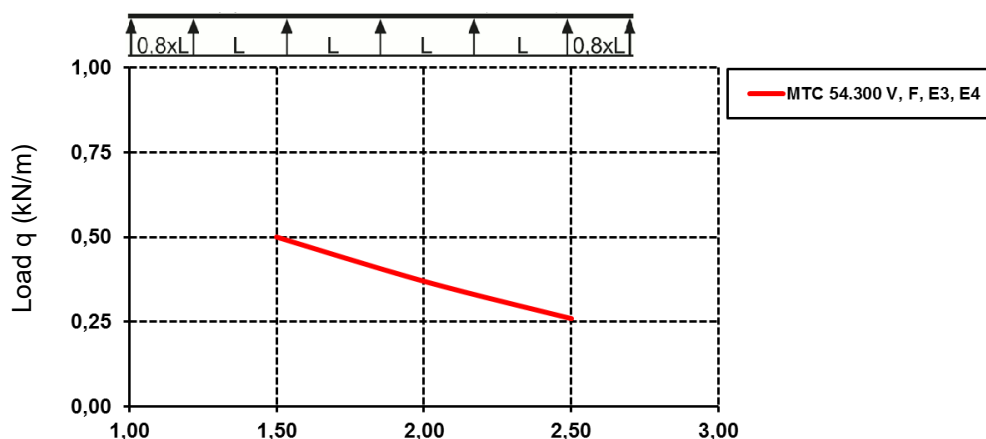

Mounting distance (m)

The load details shown in the diagram are independent of the position of the connectors.

Packing Dimension

3 meters = 1 piece

✓ VP1-smallest packaging unit (PU)

Lenght	3032 mm	Width	319 mm	Height	61.00 mm
Gross weight	6,7 kg	Volume	0,058 m ³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

6 meters = 1 bundle

Lenght	3032 mm	Width	324 mm	Height	66.00 mm
Gross weight	13 kg	Volume	0,064 m ³		
Min. Quantity	6.00 m	Max. Quantity	6.00 m		

234 meters = 1 rack

Lenght	3032 mm	Width	1162 mm	Height	1120 mm
Gross weight	620 kg	Volume	3,945 m ³		
Min. Quantity	234.00 m	Max. Quantity	234.00 m		

Tender Text

Wire mesh tray according to DIN EN 61537, U-shaped, made of steel wires, spot-welded, for quick fixing with welded splice plates in the sides and bottom. VDE certified! For use in functional integrity maintenance, please observe additional regulations!

Dimensions (approx. dimensions)

Technical Datasheet

Wire Mesh Tray System

MTC 54.300 F nx **CITO**Line

the photorealistic images are to be considered as reference images

Tender Text

Nominal dimension H x W (inside) : 54 x 300 mm
Longitudinal wire Ø : 4.82 mm
Bottom longitudinal wire spacing : 50 mm
Transverse wire Ø : 4.82 mm
Transverse wire spacing : 100 mm
Delivery length L : 3000 mm
Usable cross-section : 15262 mm²
Material : Steel, hot-dip galvanised according to DIN EN ISO 1461
NIEDAX Model no. : MTC 54.300 F
EP Material _____ EP Wage _____
Unit price/metre

Safety & Environment

REACH Date	21.01.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	CH
Customs tariff number	73089098

Related items

Cover

Model No.	Description
GRDHL 30 F	Cover retaining lug for cover wire mesh tray, steel, hot dip galvanised DIN EN ISO 1461
MTCC 300/7.5° F	Cover for MTC wire mesh tray, 315,2x3000 mm, 7,5° tilt angle, steel, hot dip galvanised DIN EN ISO 1461

Barrier strip

Model No.	Description
GRTB 6 F	Barrier strip fastening clamp, steel, hot dip galvanised DIN EN ISO 1461
GRVC 14 F	Barrier strip fastening clamp, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RW 50 F	Barrier strip, 47x3000 mm, t=0,75 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RW 60 F	Barrier strip, 55x3000 mm, t=0,75 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories