



Flat Angle 45°

with screw connector perforation, with cover

LEWB 60.200

EAN Code: 4013339534302
Smallest packaging unit:4 pcs.

the photorealistic images are to be considered as reference images

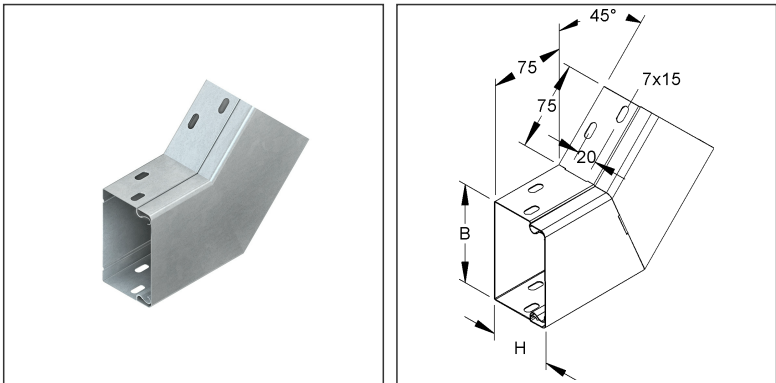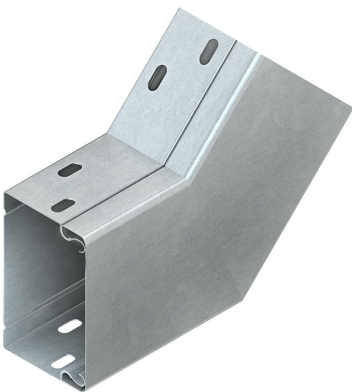

Article Description

Flat angle 45° with cover & screw connector perforation, 60x200 mm, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N16
quantity unit	pcs.

Weight

Weight per quantity unit	1,013 kg / pcs.
Weight in kg per 100	101 kg / 100pcs.

Technical Datasheet

Cable protection duct

LEWB 60.200

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	254 mm
Width	61.00 mm
Depth/length	270 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	270 mm	Width	61.00 mm	Height	254 mm
Gross weight	1,01 kg	Volume	0,004 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

4 pieces = 1 carton		✓ VP2-preferred PU			
Lenght	480 mm	Width	280 mm	Height	140.00 mm
Gross weight	4,94 kg	Volume	0,019 m³		
Min. Quantity	4.00 pcs.	Max. Quantity	4.00 pcs.		

Tender Text

Vertical elbow 45° for industrial duct, with snap-on cover, duct bottom part unperforated but with screw connector perforations in the sides, the equipotential bonding of the covers is carried out automatically when snapped on, accessories for equipotential bonding, two splice plates LIV 60 per joint, must be ordered separately.

VDE certified! for industrial ducts : LUE... LI...

Dimensions (approx. dimensions) H x W (approx. dimensions) : 60 x 200 mm

Leg length inside : 75 mm

Material : steel, pre-galvanised acc. to DIN EN 10346

NIEDAX Model No. : LEWB 60.200

EP Material_____ EP Lohn_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Connector

Model No.	Description
LIV 60	Universal-splice plate, asymmetrical, steel, pre-galvanised according to DIN EN 10346, incl. accessories