
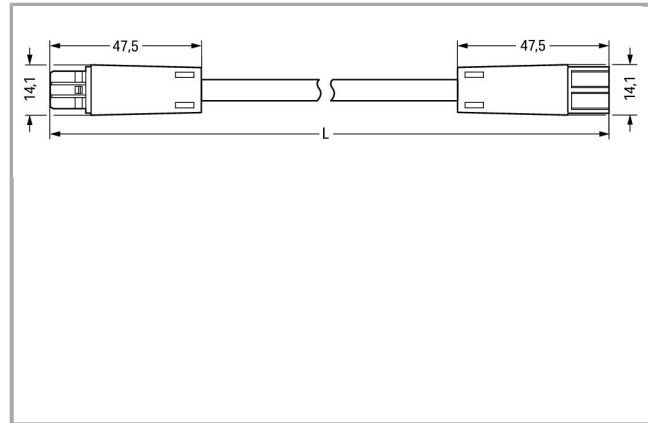


## Fișă tehnică | Număr articol: 894-8992/023-107

pre-assembled interconnecting cable; Socket/plug; 2-pole; Cod. F; 1 m; gray

[www.wago.com/894-8992/023-107](http://www.wago.com/894-8992/023-107)

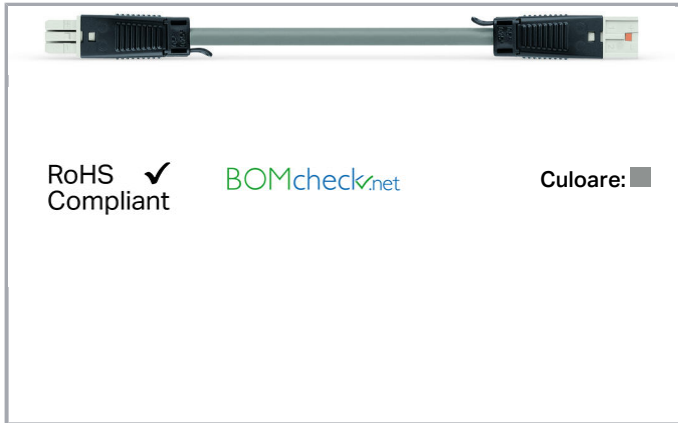

### Descriere articol

- For low voltages up to 50 V
- Compact size, standardized interface
- Available in two different custom coding options with mismatching protection

### Note:

Cables with a different fire class can be found in the eShop.

### Note on mismatching protection:

All WINSTA<sup>®</sup> components are 100% protected against mismatching when:

- plugging different numbers of poles
- plugging while rotated 180
- plugging while laterally staggered
- plugging one pole

### Date

### Electrical data

Note on Contact Resistance

<p>approx. 3mΩ contact resistance</p>

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

**Ratings per IEC/EN 60664-1**

Ratings per	IEC/EN 60664-1
Nominal voltage (III/3)	50 V
Rated surge voltage (III/3)	0,8 kV
Rated current	3 A
Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3

**Connection data**

Conductor diameter	0,8 mm
Pole No.	2
Total number of potentials	2
Conductor preparation	tip-bonded
Connection type	Socket - Plug

**Geometrical Data**

Total length	1 m
--------------	-----

**Mechanical data**

Technologie	KNX
Coding	F
Mating force of a plug-in connection	approx. 10 ... 15 N
Retention force of a plug-in connection	when locked: > 80N
Unmating force of a plug-in connection	when unlocked: approx. 15 ... 20 N
Number of mating cycles	200

Connection type	Socket - Plug
Type of pre-assembled cable	Interconnecting cable
Cable type	J-Y(ST)Y...LG 1x2x0.8
Marking	1+ 2-
Protection type	IP20
Note on protection type	Only when mated and secured with a strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)
Potential marking	1+ 2-

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
 /Representative Office Romania  
 Sos. Pipera-Tunari nr. 1/1  
 building 1, 2nd floor | 077190 Voluntari, Ilfov  
 Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
 Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

Application	KNX
-------------	-----

### Plug connection

Mismating protection	Yes
Locking of plug-in connection	locking lever

### Material Data

Color	gray
Insulation material	Polyamide 66 (PA 66)
Fire class per EN 50575	D <sub>ca</sub>
Contact material	Copper alloy (surface-treated)
Fire load	1,362 MJ
Connector color	light gray
Strain relief color	black
Sheathed cable color	gray
Halogen-free	Yes
Weight	45 g

### Environmental Requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	PVC cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

### Commercial data

Packaging type	not packed
Country of origin	DE
GTIN	4050821473466
Customs tariff number	85444290900

### Counterpart



Nr. articol 893-2032  
Snap-in plug; 2-pole; Cod. F; light gray

[www.wago.com/893-2032](http://www.wago.com/893-2032)



Nr. articol 893-2022  
Snap-in socket; without locking lever; 2-pole; Cod. F; light gray

[www.wago.com/893-2022](http://www.wago.com/893-2022)

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.



**Nr. articol**893-1022

Socket; with strain relief housing; 2-pole; Cod. F; light gray

[www.wago.com/893-1022](http://www.wago.com/893-1022)



**Nr. articol**893-1032

Plug; with strain relief housing; 2-pole; Cod. F; light gray

[www.wago.com/893-1032](http://www.wago.com/893-1032)



**Nr. articol**893-1656

T-distribution connector; 2-pole; 1 input; 2 outputs; green

[www.wago.com/893-1656](http://www.wago.com/893-1656)

## Installation Notes

## Familie de produse

<i>WINSTA</i>® KNX

Afișare globală produse din familie.

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: [info-RO@wago.com](mailto:info-RO@wago.com)

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.