
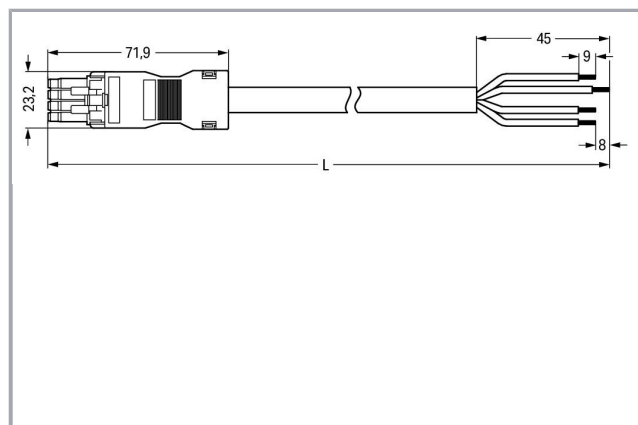


## Fișă tehnică | Număr articol: 891-8994/106-101

pre-assembled connecting cable; Eca; Socket/open-ended; 4-pole; Cod. A;  
H05VV-F 4G 1.5 mm<sup>2</sup>; 1 m; 1,50 mm<sup>2</sup>; black

[www.wago.com/891-8994/106-101](http://www.wago.com/891-8994/106-101)

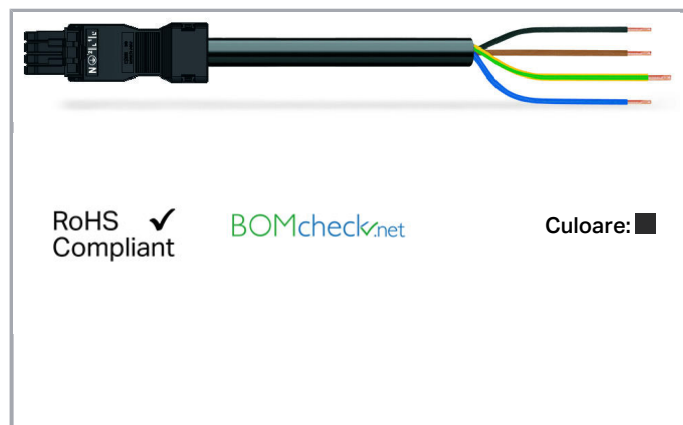

### Descriere articol

- Protected against mismatching and maintenance-free
- Compact design with 4.4 mm pole spacing

### Note:

Cables with a different fire class can be found in the eShop.

### Note on mismatching protection:

All WINSTA<sup>®</sup> components are 100% protected against mismatching when:

- plugging different numbers of poles
- plugging while rotated 180
- plugging while laterally staggered
- plugging one pole

### Safety information 1:

Application note for the U.S. market (USR): Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 5 A and voltages up to 600 V. For further information, please contact your local sales office.

### Date

### Electrical data

Note on Contact Resistance

approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/socket

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: [info-RO@wago.com](mailto:info-RO@wago.com)

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

## Ratings per IEC/EN 60664-1

|                             |                                                                      |
|-----------------------------|----------------------------------------------------------------------|
| Ratings per                 | IEC/EN 60664-1                                                       |
| Nominal voltage (III/3)     | 400 V                                                                |
| Rated surge voltage (III/3) | 6 kV                                                                 |
| Rated current               | 16 A                                                                 |
| Legend (ratings)            | (III / 3) $\triangleq$ Overvoltage category III / Pollution degree 3 |

## Approvals per UL 1977

|                       |       |
|-----------------------|-------|
| Rated voltage UL 1977 | 600 V |
| Rated current UL 1977 | 12 A  |

## Connection data

|                                 |                               |
|---------------------------------|-------------------------------|
| Strip length                    | 9 mm / 0.35 inch              |
| Pole No.                        | 4                             |
| Total number of potentials      | 4                             |
| Ground function                 | with preceding ground contact |
| Conductor preparation           | tip-bonded                    |
| Sheathed cable diameter         | 8,4 ... 10,5 mm               |
| Wire cross-section              | 1,5 mm <sup>2</sup>           |
| Strip length (outer insulation) | 45 mm                         |
| Connection type                 | Socket - Free end             |

## Geometrical Data

|              |                     |
|--------------|---------------------|
| Pin spacing  | 4,4 mm / 0.173 inch |
| Total length | 1 m                 |

## Mechanical data

|                                         |                                                                                                           |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------|
| Coding                                  | A                                                                                                         |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)                                                            |
| Retention force of a plug-in connection | when locked: > 80N                                                                                        |
| Unmating force of a plug-in connection  | when unlocked: approx. 20 ... 70 N (depending on pole number)                                             |
| Number of mating cycles                 | 200, without resistive load<br>100, with resistive load $I_N = 16$ A, tested (1.5mm <sup>2</sup> /AWG 16) |

Supus modificărilor.



|                             |                            |
|-----------------------------|----------------------------|
| Connection type             | Socket - free end          |
| Type of pre-assembled cable | Connecting cable           |
| Cable type                  | H05VV-F 4G1.5              |
| Marking                     | N 2/L 1/L'                 |
| Protection type             | IP40                       |
| Potential marking           | N 2/L 1/L'                 |
| Application                 | General mains applications |

### Plug connection

|                               |               |
|-------------------------------|---------------|
| Mismating protection          | Yes           |
| Locking of plug-in connection | locking lever |
| Locking lever                 | retrofitable  |

### Material Data

|                                  |                                          |
|----------------------------------|------------------------------------------|
| Color                            | black                                    |
| Insulation material              | Polyamide 66 (PA 66)                     |
| Fire class per EN 50575          | E <sub>ca</sub>                          |
| Contact material                 | Copper or copper alloy (surface-treated) |
| Fire load                        | 2,402 MJ                                 |
| Connector color                  | black                                    |
| Printing color of mating face    | white                                    |
| Strain relief color              | black                                    |
| Printing color of strain relief  | white                                    |
| Sheathed cable color             | black                                    |
| Printing color of sheathed cable | white                                    |
| Sheath material                  | PVC                                      |
| Weight                           | 142,5 g                                  |

### Environmental Requirements

|                                          |                                                                                                           |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                                                                                             |
| Continuous operating temperature         | -35 ... +85 °C                                                                                            |
| Note on continuous operating temperature | PVC cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

### Commercial data

|                |            |
|----------------|------------|
| Packaging type | not packed |
|----------------|------------|

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: [info-RO@wago.com](mailto:info-RO@wago.com)

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

|                       |               |
|-----------------------|---------------|
| Country of origin     | PL            |
| GTIN                  | 4055143403931 |
| Customs tariff number | 85444290900   |

## Aprobări / certificate

### Country specific Approvals

| Emblema                                                                          | Aprobare                                     | Text de aprobare suplimentar | Nume certificat |
|----------------------------------------------------------------------------------|----------------------------------------------|------------------------------|-----------------|
|  | <b>KEMA/KEUR</b><br>DEKRA Certification B.V. | EN 61535                     | 2179129.02      |

## Counterpart



### Nr. articol890-114

Plug; with strain relief housing; 4-pole; 1,50 mm<sup>2</sup>; black

[www.wago.com/890-114](http://www.wago.com/890-114)



### Nr. articol890-214

Plug; 4-pole; 1,50 mm<sup>2</sup>; black

[www.wago.com/890-214](http://www.wago.com/890-214)



### Nr. articol890-626

T-distribution connector; 4-pole; Cod. A; 1 input; 2 outputs; 2 locking levers; black

[www.wago.com/890-626](http://www.wago.com/890-626)



### Nr. articol890-627

T-distribution connector; 4-pole; Cod. A; 1 input; 2 outputs; 3 locking levers; for flying leads; black

[www.wago.com/890-627](http://www.wago.com/890-627)



### Nr. articol890-714

Snap-in plug; 4-pole; Cod. A; 1,50 mm<sup>2</sup>; black

[www.wago.com/890-714](http://www.wago.com/890-714)



### Nr. articol890-814

Plug for PCBs; straight; 4-pole; Cod. A

[www.wago.com/890-814](http://www.wago.com/890-814)



### Nr. articol890-814/011-000

Plug for PCBs; angled; 4-pole; Cod. A

[www.wago.com/890-814/011-000](http://www.wago.com/890-814/011-000)

### Nr. articol890-944

Supus modificărilor.



h-distribution connector; 4-pole; Cod. A; 1 input; 2 outputs; outputs on one side; 2 locking levers; black

[www.wago.com/890-944](http://www.wago.com/890-944)



Nr. articol 890-945

h-distribution connector; 4-pole; Cod. A; 1 input; 2 outputs; outputs on one side; 3 locking levers; for flying leads; black

[www.wago.com/890-945](http://www.wago.com/890-945)

## Descărcări

### CAD/CAE-Data

#### CAE data

WSCAD Universe 891-8994/106-101

URL

Descărcare

## Installation Notes

## Familie de produse

**<i>WINSTA</i>® MINI**

Afișare globală produse din familie.

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: [info-RO@wago.com](mailto:info-RO@wago.com)

Aveți întrebări despre produsele noastre?

Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.