



## Fișă tehnică | Număr articol: 281-665/281-400

Component terminal block; 4-conductor; with diode 1N5408; anode, left side; for DIN-rail 35 x 15 and 35 x 7.5; 4 mm<sup>2</sup>; CAGE CLAMP®; 4,00 mm<sup>2</sup>; gray

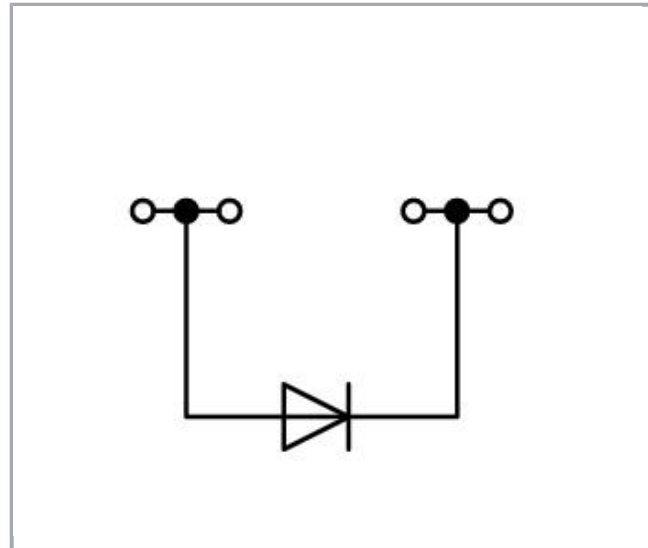

[www.wago.com/281-665/281-400](http://www.wago.com/281-665/281-400)

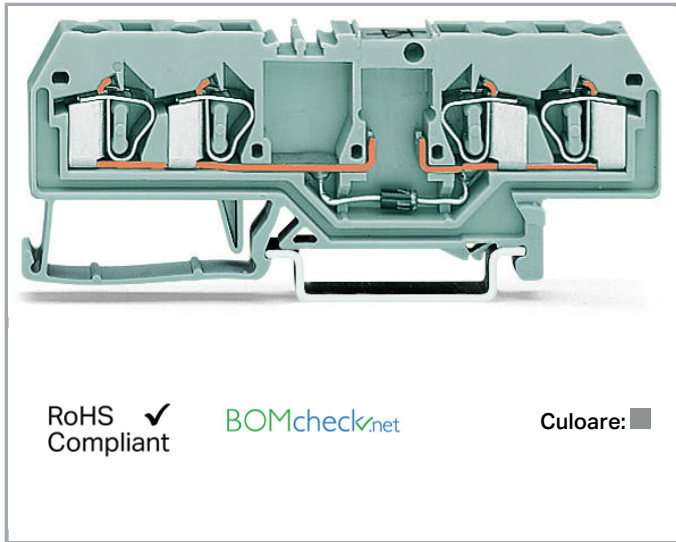

### Descriere articol

#### Note:

##### Terminating Aluminum Conductors

WAGO spring clamp terminal blocks are suitable for solid aluminum conductors up to 4 mm<sup>2</sup>/12 AWG if WAGO "Alu-Plus" Contact Paste is used for termination.

##### "Alu-Plus" Contact Paste Advantages:

- Automatically destroys the oxide film during clamping.
- Prevents fresh oxidation at the clamping point.
- Prevents electrolytic corrosion between aluminum and copper conductors (in the same terminal block).
- Provides long-term protection against corrosion.

Using terminal blocks with CAGE CLAMP® Spring Pressure Connection Technology, **aluminum conductors must first be cleaned with a blade and then immediately be inserted into the clamping units filled with "Alu-Plus" Contact Paste.**

It is also possible to apply WAGO "Alu-Plus" **additionally** on the whole surface of the aluminum conductor before termination.

Please note that the nominal currents must be adapted to the reduced conductivity of the aluminum conductors::

2.5 mm<sup>2</sup> = 16 A

4 mm<sup>2</sup> = 22 A

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

**Date****Electrical data**

|                 |         |
|-----------------|---------|
| Nominal voltage | 250 V   |
| Reverse voltage | 1.000 V |

**Ratings per IEC/EN 60664-1**

|               |                  |
|---------------|------------------|
| Ratings per   | IEC/EN 60947-7-1 |
| Rated current | 1,5 A            |

**Connection data**

|                                   |  |
|-----------------------------------|--|
| Connection technology             | CAGE CLAMP®                                |
| Actuation type                    | Operating tool                             |
| Connectable conductor materials   | Copper<br>Aluminum                         |
| Solid conductor                   | 0,08 ... 4 mm <sup>2</sup> / 28 ... 12 AWG |
| Fine-stranded conductor           | 0,08 ... 4 mm <sup>2</sup> / 28 ... 12 AWG |
| Strip length                      | 9 ... 10 mm / 0.35 ... 0.39 inch           |
| Total number of connection points | 4  |
| Total number of potentials        | 1  |
| Number of levels                  | 1  |
| Wiring type                       | Front-entry wiring                         |

**Geometrical Data**

|                                    |                    |
|------------------------------------|--------------------|
| Width                              | 6 mm / 0.236 inch  |
| Height from upper-edge of DIN-rail | 29 mm / 1.142 inch |
| Depth                              | 86 mm / 3.386 inch |

**Mechanical data**

|               |                 |
|---------------|-----------------|
| Design        | horizontal type |
| Mounting type | DIN-35 rail     |
| Marking level | Center marking  |

**Material Data**

|                     |                      |
|---------------------|----------------------|
| Color               | gray                 |
| Insulation material | Polyamide 66 (PA 66) |

Supus modificărilor.



|           |          |
|-----------|----------|
| Fire load | 0,206 MJ |
| Weight    | 13,7 g   |

### Commercial data



|                       |                                  |
|-----------------------|----------------------------------|
| Product Group         | 1 (Rail Mounted Terminal Blocks) |
| Packaging type        | BOX                              |
| Country of origin     | CN                               |
| GTIN                  | 4050821275510                    |
| Customs tariff number | 85369010000                      |

### Aprobări / certificate

#### Country specific Approvals

| Emblemă   | Aprobare                              | Text de aprobare suplimentar | Nume certificat |
|---|---------------------------------------|------------------------------|-----------------|
|   | CCA<br>DEKRA Certification B.V.       | EN 60947, IEC 60947          | NTR NL-7454/A1  |
|  | KEMA/KEUR<br>DEKRA Certification B.V. | EN 60947                     | 71-107288       |

#### Ship Approvals

| Emblemă  | Aprobare   | Text de aprobare suplimentar | Nume certificat  |
|--|--|------------------------------|------------------|
|  | ABS<br>American Bureau of Shipping               | -                            | 20-HG1941090-PDA |
|  | DNV GL<br>Det Norske Veritas, Germanischer Lloyd | -                            | TAE00001V2       |

### Counterpart

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

## Produse compatibile

### Carrier rail



















|  |   |  |
|--|---|--|
|    | <b>Nr. articol: 210-112</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm   | <a href="http://www.wago.com/210-112">www.wago.com/210-112</a> |
|    | <b>Nr. articol: 210-113</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715                    | <a href="http://www.wago.com/210-113">www.wago.com/210-113</a> |
|    | <b>Nr. articol: 210-114</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715                     | <a href="http://www.wago.com/210-114">www.wago.com/210-114</a> |
|    | <b>Nr. articol: 210-115</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm   | <a href="http://www.wago.com/210-115">www.wago.com/210-115</a> |
|  | <b>Nr. articol: 210-118</b><br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715                   | <a href="http://www.wago.com/210-118">www.wago.com/210-118</a> |
|  | <b>Nr. articol: 210-196</b><br>Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored | <a href="http://www.wago.com/210-196">www.wago.com/210-196</a> |
|  | <b>Nr. articol: 210-197</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715                       | <a href="http://www.wago.com/210-197">www.wago.com/210-197</a> |
|  | <b>Nr. articol: 210-198</b><br>Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored  | <a href="http://www.wago.com/210-198">www.wago.com/210-198</a> |
|  | <b>Nr. articol: 210-504</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715          | <a href="http://www.wago.com/210-504">www.wago.com/210-504</a> |
|  | <b>Nr. articol: 210-505</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715        | <a href="http://www.wago.com/210-505">www.wago.com/210-505</a> |
|  | <b>Nr. articol: 210-506</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715         | <a href="http://www.wago.com/210-506">www.wago.com/210-506</a> |
|  | <b>Nr. articol: 210-508</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715           | <a href="http://www.wago.com/210-508">www.wago.com/210-508</a> |

### Jumper

Supus modificărilor.















WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

|  |  |  |
|--|--|--|
|    | <b>Nr. articol:</b> 210-103<br>Wire commoning chain; insulated; 50 connections; black                                    | <a href="http://www.wago.com/210-103">www.wago.com/210-103</a> |
|    | <b>Nr. articol:</b> 210-123<br>Wire commoning chain; insulated; 50 connections   | <a href="http://www.wago.com/210-123">www.wago.com/210-123</a> |
|    | <b>Nr. articol:</b> 249-123<br>Push-in type wire jumper; insulated; wire length 180 mm; Conductor cross section 0.75 mm² | <a href="http://www.wago.com/249-123">www.wago.com/249-123</a> |
|    | <b>Nr. articol:</b> 249-125<br>Push-in type wire jumper; insulated; wire length 60 mm; Conductor cross section 0.75 mm²  | <a href="http://www.wago.com/249-125">www.wago.com/249-125</a> |
|    | <b>Nr. articol:</b> 249-126<br>Push-in type wire jumper; insulated; wire length 110 mm; Conductor cross section 0.75 mm² | <a href="http://www.wago.com/249-126">www.wago.com/249-126</a> |
|    | <b>Nr. articol:</b> 249-127<br>Push-in type wire jumper; insulated; wire length 250 mm; Conductor cross section 0.75 mm² | <a href="http://www.wago.com/249-127">www.wago.com/249-127</a> |
|    | <b>Nr. articol:</b> 281-482<br>Comb-style jumper bar; insulated; 2-way; IN = IN terminal block; gray                     | <a href="http://www.wago.com/281-482">www.wago.com/281-482</a> |
|    | <b>Nr. articol:</b> 281-483<br>Comb-style jumper bar; insulated; 3-way; IN = IN terminal block; gray                     | <a href="http://www.wago.com/281-483">www.wago.com/281-483</a> |
|    | <b>Nr. articol:</b> 281-485<br>Comb-style jumper bar; insulated; 5-way; IN = IN terminal block; gray                     | <a href="http://www.wago.com/281-485">www.wago.com/281-485</a> |
|   | <b>Nr. articol:</b> 281-490<br>Comb-style jumper bar; insulated; 10-way; IN = IN terminal block; gray                    | <a href="http://www.wago.com/281-490">www.wago.com/281-490</a> |
|  | <b>Nr. articol:</b> 281-492<br>Alternate comb-style jumper bar; insulated; 2-way; IN = IN terminal block; gray           | <a href="http://www.wago.com/281-492">www.wago.com/281-492</a> |
|  | <b>Nr. articol:</b> 709-110<br>Wire commoning chain; insulated; 4 connections; 3 x 110 mm; black                         | <a href="http://www.wago.com/709-110">www.wago.com/709-110</a> |
|  | <b>Nr. articol:</b> 709-111<br>Wire commoning chain; insulated; 3 connections; 2 x 120 mm; black                         | <a href="http://www.wago.com/709-111">www.wago.com/709-111</a> |
|  | <b>Nr. articol:</b> 709-112<br>Wire commoning chain; insulated; 3 connections; 2 x 170 mm; black                         | <a href="http://www.wago.com/709-112">www.wago.com/709-112</a> |
| <b>End plate</b>   |  |  |
|  | <b>Nr. articol:</b> 281-334<br>End and intermediate plate; 2.5 mm thick; gray  | <a href="http://www.wago.com/281-334">www.wago.com/281-334</a> |
|  | <b>Nr. articol:</b> 281-335<br>End and intermediate plate; 2.5 mm thick; orange  | <a href="http://www.wago.com/281-335">www.wago.com/281-335</a> |
|  | <b>Nr. articol:</b> 281-338<br>Separator plate; 2 mm thick; oversized; gray  | <a href="http://www.wago.com/281-338">www.wago.com/281-338</a> |
|  | <b>Nr. articol:</b> 281-339<br>Separator plate; 2 mm thick; oversized; orange  | <a href="http://www.wago.com/281-339">www.wago.com/281-339</a> |

Supus modificărilor.














## Marking accessories

|  |  |  |
|--|--|--|
|    | <b>Nr. articol: 2009-115</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white               | <a href="http://www.wago.com/2009-115">www.wago.com/2009-115</a>                 |
|    | <b>Nr. articol: 2009-115/000-002</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow      | <a href="http://www.wago.com/2009-115/000-002">www.wago.com/2009-115/000-002</a> |
|    | <b>Nr. articol: 2009-115/000-006</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue        | <a href="http://www.wago.com/2009-115/000-006">www.wago.com/2009-115/000-006</a> |
|    | <b>Nr. articol: 2009-115/000-007</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray        | <a href="http://www.wago.com/2009-115/000-007">www.wago.com/2009-115/000-007</a> |
|    | <b>Nr. articol: 2009-115/000-012</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange      | <a href="http://www.wago.com/2009-115/000-012">www.wago.com/2009-115/000-012</a> |
|    | <b>Nr. articol: 2009-115/000-017</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green | <a href="http://www.wago.com/2009-115/000-017">www.wago.com/2009-115/000-017</a> |
|   | <b>Nr. articol: 2009-115/000-023</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green       | <a href="http://www.wago.com/2009-115/000-023">www.wago.com/2009-115/000-023</a> |
|  | <b>Nr. articol: 2009-115/000-024</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet      | <a href="http://www.wago.com/2009-115/000-024">www.wago.com/2009-115/000-024</a> |
|  | <b>Nr. articol: 249-105</b><br>Group marker carrier; gray  | <a href="http://www.wago.com/249-105">www.wago.com/249-105</a>                   |
|  | <b>Nr. articol: 793-501</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white  | <a href="http://www.wago.com/793-501">www.wago.com/793-501</a>                   |
|  | <b>Nr. articol: 793-501/000-002</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; yellow                                       | <a href="http://www.wago.com/793-501/000-002">www.wago.com/793-501/000-002</a>   |
|  | <b>Nr. articol: 793-501/000-005</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; red  | <a href="http://www.wago.com/793-501/000-005">www.wago.com/793-501/000-005</a>   |
|  | <b>Nr. articol: 793-501/000-006</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; blue   | <a href="http://www.wago.com/793-501/000-006">www.wago.com/793-501/000-006</a>   |
|  | <b>Nr. articol: 793-501/000-007</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; gray   | <a href="http://www.wago.com/793-501/000-007">www.wago.com/793-501/000-007</a>   |

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

















|  |   |  |
|--|---|--|
|    | <b>Nr. articol: 793-501/000-012</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; orange  | <a href="http://www.wago.com/793-501/000-012">www.wago.com/793-501/000-012</a>   |
|    | <b>Nr. articol: 793-501/000-017</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; light green   | <a href="http://www.wago.com/793-501/000-017">www.wago.com/793-501/000-017</a>   |
|    | <b>Nr. articol: 793-501/000-023</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; green   | <a href="http://www.wago.com/793-501/000-023">www.wago.com/793-501/000-023</a>   |
|    | <b>Nr. articol: 793-501/000-024</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; violet  | <a href="http://www.wago.com/793-501/000-024">www.wago.com/793-501/000-024</a>   |
|    | <b>Nr. articol: 793-5501</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white               | <a href="http://www.wago.com/793-5501">www.wago.com/793-5501</a>                 |
|    | <b>Nr. articol: 793-5501/000-002</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow      | <a href="http://www.wago.com/793-5501/000-002">www.wago.com/793-5501/000-002</a> |
|   | <b>Nr. articol: 793-5501/000-005</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red         | <a href="http://www.wago.com/793-5501/000-005">www.wago.com/793-5501/000-005</a> |
|  | <b>Nr. articol: 793-5501/000-006</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue        | <a href="http://www.wago.com/793-5501/000-006">www.wago.com/793-5501/000-006</a> |
|  | <b>Nr. articol: 793-5501/000-007</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray        | <a href="http://www.wago.com/793-5501/000-007">www.wago.com/793-5501/000-007</a> |
|  | <b>Nr. articol: 793-5501/000-012</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange      | <a href="http://www.wago.com/793-5501/000-012">www.wago.com/793-5501/000-012</a> |
|  | <b>Nr. articol: 793-5501/000-017</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green       | <a href="http://www.wago.com/793-5501/000-017">www.wago.com/793-5501/000-017</a> |
|  | <b>Nr. articol: 793-5501/000-023</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green | <a href="http://www.wago.com/793-5501/000-023">www.wago.com/793-5501/000-023</a> |
|  | <b>Nr. articol: 793-5501/000-024</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet      | <a href="http://www.wago.com/793-5501/000-024">www.wago.com/793-5501/000-024</a> |

**Insulation stop**

Supus modificărilor.







WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

|  |   |  |
|--|---|--|
|    | <b>Nr. articol: 281-470</b><br>Insulation stop; 0.08 - 0.2 mm <sup>2</sup> "s" (0.14 mm <sup>2</sup> "f-st"); 5 pieces/strip; white | <a href="http://www.wago.com/281-470">www.wago.com/281-470</a> |
|    | <b>Nr. articol: 281-471</b><br>Insulation stop; 0.25 - 0.5 mm <sup>2</sup> ; 5 pieces/strip; light gray                             | <a href="http://www.wago.com/281-471">www.wago.com/281-471</a> |
|    | <b>Nr. articol: 281-472</b><br>Insulation stop; 0.75 - 1.5 mm <sup>2</sup> ; 5 pieces/strip; dark gray                              | <a href="http://www.wago.com/281-472">www.wago.com/281-472</a> |
| <b>tools</b>   |   |  |
|    | <b>Nr. articol: 210-657</b><br>Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; short                         | <a href="http://www.wago.com/210-657">www.wago.com/210-657</a> |
|    | <b>Nr. articol: 210-658</b><br>Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short                 | <a href="http://www.wago.com/210-658">www.wago.com/210-658</a> |
|    | <b>Nr. articol: 210-720</b><br>Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft                                | <a href="http://www.wago.com/210-720">www.wago.com/210-720</a> |
| <b>Protective Warning Marker</b>   |   |  |
|    | <b>Nr. articol: 281-415</b><br>Protective warning marker; with high-voltage symbol, black; for 5 terminal blocks; yellow            | <a href="http://www.wago.com/281-415">www.wago.com/281-415</a> |
| <b>assembling</b>  |   |  |
|    | <b>Nr. articol: 209-106</b><br>Mounting carrier; for isolated mounting on DIN 35 rails; gray  | <a href="http://www.wago.com/209-106">www.wago.com/209-106</a> |
|  | <b>Nr. articol: 709-153</b><br>Cover; Type 1; suitable for cover carrier, type 1; 1 m long; transparent                             | <a href="http://www.wago.com/709-153">www.wago.com/709-153</a> |
| <b>ferrule</b>   |   |  |
|  | <b>Nr. articol: 216-106</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; uninsulated; electro-tin plated                    | <a href="http://www.wago.com/216-106">www.wago.com/216-106</a> |
|  | <b>Nr. articol: 216-201</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; white               | <a href="http://www.wago.com/216-201">www.wago.com/216-201</a> |
|  | <b>Nr. articol: 216-202</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; gray               | <a href="http://www.wago.com/216-202">www.wago.com/216-202</a> |
|  | <b>Nr. articol: 216-203</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; red                   | <a href="http://www.wago.com/216-203">www.wago.com/216-203</a> |
|  | <b>Nr. articol: 216-204</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; black               | <a href="http://www.wago.com/216-204">www.wago.com/216-204</a> |
|  | <b>Nr. articol: 216-205</b><br>Ferrule; Sleeve for 2.08 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; yellow             | <a href="http://www.wago.com/216-205">www.wago.com/216-205</a> |
|  | <b>Nr. articol: 216-206</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; blue                | <a href="http://www.wago.com/216-206">www.wago.com/216-206</a> |
|  | <b>Nr. articol: 216-241</b>   |  |

Supus modificărilor.



|   |  |  |
|---|--|--|
|  | Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white | <a href="http://www.wago.com/216-241">www.wago.com/216-241</a> |
|   | <b>Nr. articol: 216-242</b>  |  |
|  | Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray | <a href="http://www.wago.com/216-242">www.wago.com/216-242</a> |
|   | <b>Nr. articol: 216-243</b>  |  |
|  | Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red     | <a href="http://www.wago.com/216-243">www.wago.com/216-243</a> |
|   | <b>Nr. articol: 216-244</b>  |  |
|  | Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | <a href="http://www.wago.com/216-244">www.wago.com/216-244</a> |
|   | <b>Nr. articol: 216-246</b>  |  |
|  | Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue  | <a href="http://www.wago.com/216-246">www.wago.com/216-246</a> |
|   | <b>Nr. articol: 216-301</b>  |  |
|   | Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated; yellow   | <a href="http://www.wago.com/216-301">www.wago.com/216-301</a> |
|   | <b>Nr. articol: 216-302</b>  |  |
|  | Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated; green  | <a href="http://www.wago.com/216-302">www.wago.com/216-302</a> |

## Descărcări

### Documentation

#### Additional Information

|                        |             |               |            |
|------------------------|-------------|---------------|------------|
| Technical explanations | Apr 3, 2019 | pdf<br>2,1 MB | Descărcare |
|------------------------|-------------|---------------|------------|

### CAD/CAE-Data

#### CAD data

|                              |     |            |
|------------------------------|-----|------------|
| 2D/3D Models 281-665/281-400 | URL | Descărcare |
|------------------------------|-----|------------|

#### CAE data

|                                   |     |            |
|-----------------------------------|-----|------------|
| EPLAN Data Portal 281-665/281-400 | URL | Descărcare |
|-----------------------------------|-----|------------|


|                                |     |            |
|--------------------------------|-----|------------|
| WSCAD Universe 281-665/281-400 | URL | Descărcare |
|--------------------------------|-----|------------|

### Installation Notes

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

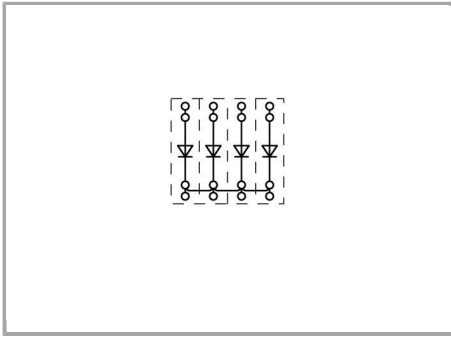

Polarized diode gate, common cathode

Supus modificărilor.