



## Fișă tehnică | Număr articol: 771-8982/016-301

pre-assembled interconnecting cable; Eca; Socket/plug; 2-pole; Cod. I;  
H05Z1Z1-F 2 x 1,50 mm<sup>2</sup>; 3 m; 1,50 mm<sup>2</sup>; blue

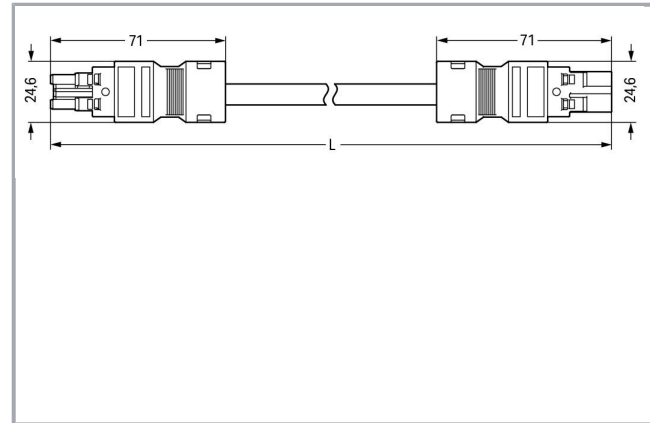

[www.wago.com/771-8982/016-301](http://www.wago.com/771-8982/016-301)

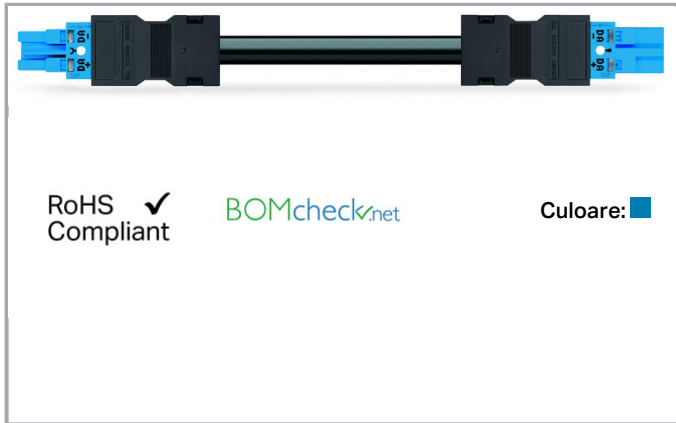

### Descriere articol

- Protected against mismatching and maintenance-free
- Push-in CAGE CLAMP® spring pressure connection technology allows solid conductors to be simply pushed into a unit
- Two-wire connection per pole for loops or bridges

### Note:

Cables with a different fire class can be found in the eShop.

### Note on mismatching protection:

All WINSTA® components are 100% protected against mismatching when:

- plugging different numbers of poles
- plugging while rotated 180
- plugging while laterally staggered
- plugging one pole

### Safety information 1:

Application note for the U.S. market (USR): Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 16 A and voltages up to 600 V. For further information, please contact your local sales office.

### Date

### Electrical data

Note on Contact Resistance

approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

transition plug/socket

**Ratings per IEC/EN 60664-1**

|                             |                                                           |
|-----------------------------|-----------------------------------------------------------|
| Ratings per                 | IEC/EN 60664-1                                            |
| Nominal voltage (III/3)     | 250 V                                                     |
| Rated surge voltage (III/3) | 4 kV                                                      |
| Rated current               | 16 A                                                      |
| Legend (ratings)            | (III / 3) ≙ Overvoltage category III / Pollution degree 3 |

**Approvals per UL 1977**

|                       |       |
|-----------------------|-------|
| Rated voltage UL 1977 | 600 V |
| Rated current UL 1977 | 23 A  |

**Connection data**

|                            |                     |
|----------------------------|---------------------|
| Pole No.                   | 2                   |
| Total number of potentials | 2                   |
| Conductor preparation      | tip-bonded          |
| Sheathed cable diameter    | 6,8 ... 8,6 mm      |
| Wire cross-section         | 1,5 mm <sup>2</sup> |
| Connection type            | Socket - Plug       |

**Geometrical Data**

|              |                    |
|--------------|--------------------|
| Pin spacing  | 10 mm / 0.394 inch |
| Total length | 3 m                |

**Mechanical data**

|                                         |                                                                                                  |
|-----------------------------------------|--------------------------------------------------------------------------------------------------|
| Technologie                             | DALI                                                                                             |
| Coding                                  | I                                                                                                |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)                                                   |
| Retention force of a plug-in connection | when locked: > 80N                                                                               |
| Unmating force of a plug-in connection  | when unlocked: approx. 20 ... 70 N (depending on pole number)                                    |
| Number of mating cycles                 | 200 (without resistive load) 100 (with resistive load $I_N = 25$ A), tested (4 mm <sup>2</sup> ) |
| Connection type                         | Socket - Plug                                                                                    |
| Type of pre-assembled cable             | Interconnecting cable                                                                            |
| Cable type                              | H05Z1Z1-F 2x1.5                                                                                  |

Supus modificărilor.



|                         |                                                                                                       |
|-------------------------|-------------------------------------------------------------------------------------------------------|
| Marking                 | DA+ DA-                                                                                               |
| Protection type         | IP20                                                                                                  |
| Note on protection type | Only when mated (these compact connectors are not designed for use in open, easily accessible areas). |
| Potential marking       | DA+ DA-                                                                                               |
| Application             | Lighting management                                                                                   |

### Plug connection

|                               |               |
|-------------------------------|---------------|
| Mismating protection          | Yes           |
| Locking of plug-in connection | locking lever |
| Locking lever                 | retrofittable |

### Material Data

|                                  |                                          |
|----------------------------------|------------------------------------------|
| Color                            | blue                                     |
| Insulation material              | Polyamide 66 (PA 66)                     |
| Fire class per EN 50575          | E <sub>ca</sub>                          |
| Contact material                 | Copper or copper alloy (surface-treated) |
| Fire load                        | 89,37 MJ                                 |
| Connector color                  | blue                                     |
| Printing color of mating face    | white                                    |
| Strain relief color              | black                                    |
| Printing color of strain relief  | white                                    |
| Sheathed cable color             | black                                    |
| Printing color of sheathed cable | white                                    |
| Halogen-free                     | Yes                                      |
| Weight                           | 283,5 g                                  |

### Environmental Requirements

|                                          |                                                                                                           |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                                                                                             |
| Continuous operating temperature         | -35 ... +85 °C                                                                                            |
| Note on continuous operating temperature | PVC cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

### Commercial data

|                   |               |
|-------------------|---------------|
| Packaging type    | not packed    |
| Country of origin | DE            |
| GTIN              | 4055143293266 |

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

Customs tariff number

85444290900

## Aprobări / certificate

### Country specific Approvals

| Emblemă                                                                          | Aprobare                              | Text de aprobare suplimentar | Nume certificat |
|----------------------------------------------------------------------------------|---------------------------------------|------------------------------|-----------------|
|  | CCA<br>DEKRA Certification B.V.       | EN 61535                     | NTR NL-7355     |
|  | KEMA/KEUR<br>DEKRA Certification B.V. | EN 61535                     | 2179129.01      |

## Counterpart

## Produse compatibile

### Marking accessories

Nr. articol: 210-334

Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white

[www.wago.com/210-334](http://www.wago.com/210-334)

## Descărcări

### CAD/CAE-Data

#### CAE data

WSCAD Universe 771-8982/016-301

URL

Descărcare

## Installation Notes

## Familie de produse

&lt;i&gt;WINSTA&lt;/i&gt;® MIDI

Afișare globală produse din familie.

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.