



Fișă tehnică | Număr articol: 811-310

2-conductor fuse terminal block; for cylindrical fuses 10 x 38 mm; 13/32" x 11/2"; 1-pole; without blown fuse indication; for DIN-rail 35 x 15 and 35 x 7.5; 16 mm²; CAGE CLAMP®; 16,00 mm²; light gray

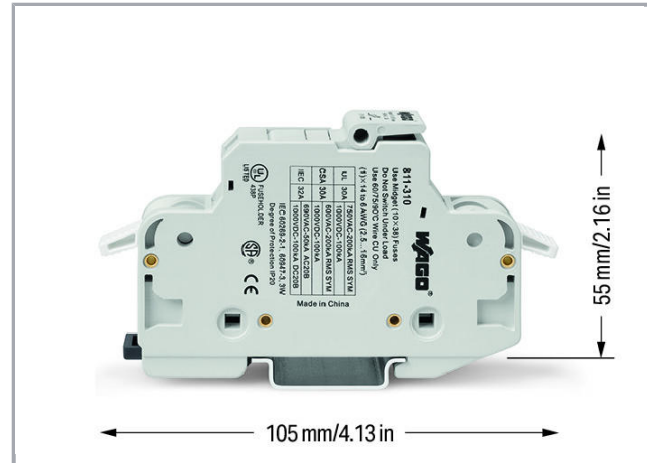

www.wago.com/811-310

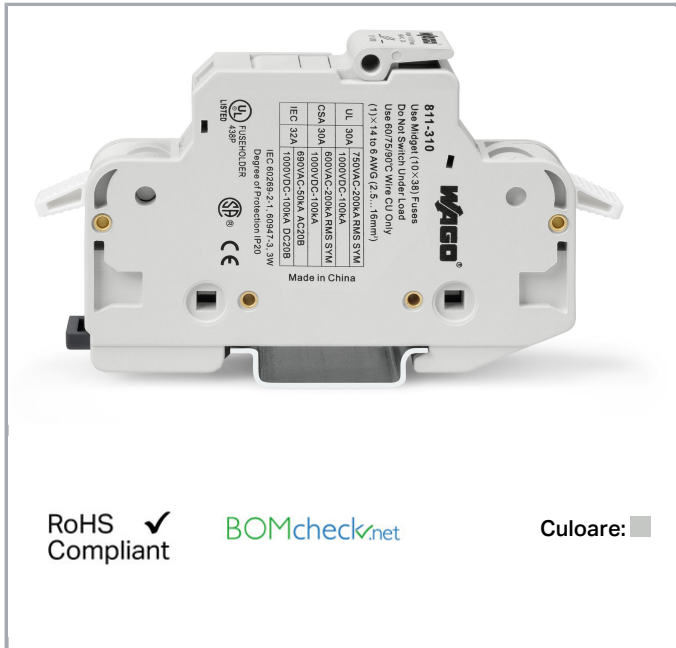

Descriere articol

Safety information 1:

Electrical ratings are given by the fuse.

Safety information 2:

Operating temperature range: -35 °C ... +85 °C

Date

Electrical data

Voltage type 1	AC
Voltage type 2	DC

Ratings per IEC/EN 60664-1

Ratings per	IEC/EN 60947-7-3
Nominal voltage (III/3)	690 V
Rated current	32 A
Rated voltage (III/3) 2	1000 V

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG
/Representative Office Romania
Sos. Pipera-Tunari nr. 1/1
building 1, 2nd floor | 077190 Voluntari, Ilfov
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.



Connection data

Connection technology	CAGE CLAMP®
Actuation type	Operating tool
Connectable conductor materials	Copper
Solid conductor	2,5 ... 16 mm ² / 14 ... 6 AWG
Fine-stranded conductor	2,5 ... 16 mm ² / 16 ... 6 AWG
Strip length	12 ... 13 mm / 0.47 ... 0.51 inch
Pole No.	1
Total number of connection points	2
Total number of potentials	1
Number of levels	1
Wiring type	Side-entry wiring

Geometrical Data

Width	17,5 mm / 0.689 inch
Height from upper-edge of DIN-rail	55 mm / 2.165 inch
Depth	105 mm / 4.134 inch

Mechanical data

Design	horizontal type
Mounting type	DIN-35 rail

Material Data

Color	light gray
Insulation material	Polyamide 66 (PA 66)
Weight	1,1 g

Commercial data

Product Group	1 (Rail Mounted Terminal Blocks)
Packaging type	BOX
GTIN	4050821498889

Counterpart

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG
 /Representative Office Romania
 Sos. Pipera-Tunari nr. 1/1
 building 1, 2nd floor | 077190 Voluntari, Ilfov
 Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?
 Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

Produse compatibile

assembling



Nr. articol: 811-612
Coupling kit; for 12 poles

www.wago.com/811-612

Marking accessories



Nr. articol: 285-442
Adaptor; gray

www.wago.com/285-442



Nr. articol: 793-501
WMB marking card; as card; not stretchable; plain; snap-on type; white

www.wago.com/793-501



Nr. articol: 793-501/000-002
WMB marking card; as card; not stretchable; plain; snap-on type; yellow

www.wago.com/793-501/000-002



Nr. articol: 793-501/000-005
WMB marking card; as card; not stretchable; plain; snap-on type; red

www.wago.com/793-501/000-005



Nr. articol: 793-501/000-006
WMB marking card; as card; not stretchable; plain; snap-on type; blue

www.wago.com/793-501/000-006



Nr. articol: 793-501/000-007
WMB marking card; as card; not stretchable; plain; snap-on type; gray

www.wago.com/793-501/000-007



Nr. articol: 793-501/000-012
WMB marking card; as card; not stretchable; plain; snap-on type; orange

www.wago.com/793-501/000-012



Nr. articol: 793-501/000-017
WMB marking card; as card; not stretchable; plain; snap-on type; light green

www.wago.com/793-501/000-017



Nr. articol: 793-501/000-023
WMB marking card; as card; not stretchable; plain; snap-on type; green

www.wago.com/793-501/000-023



Nr. articol: 793-501/000-024
WMB marking card; as card; not stretchable; plain; snap-on type; violet

www.wago.com/793-501/000-024

Nr. articol: 793-5501

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on www.wago.com/793-5501

Supus modificărilor.



type; white

**Nr. articol: 793-5501/000-002**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

www.wago.com/793-5501/000-002**Nr. articol: 793-5501/000-005**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red

www.wago.com/793-5501/000-005**Nr. articol: 793-5501/000-006**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue

www.wago.com/793-5501/000-006**Nr. articol: 793-5501/000-007**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray

www.wago.com/793-5501/000-007**Nr. articol: 793-5501/000-012**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange

www.wago.com/793-5501/000-012**Nr. articol: 793-5501/000-014**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; brown

www.wago.com/793-5501/000-014**Nr. articol: 793-5501/000-017**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green

www.wago.com/793-5501/000-017**Nr. articol: 793-5501/000-023**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green

www.wago.com/793-5501/000-023**Nr. articol: 793-5501/000-024**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet

www.wago.com/793-5501/000-024

Jumper

**Nr. articol: 811-472**

Push-in type jumper bar; insulated; 2-way; Nominal current 63 A; light gray

www.wago.com/811-472**Nr. articol: 811-473**

Push-in type jumper bar; insulated; 3-way; Nominal current 63 A; light gray

www.wago.com/811-473**Nr. articol: 811-474**









Push-in type jumper bar; insulated; 4-way; Nominal current 63 A; light gray

www.wago.com/811-474**Nr. articol: 811-475**

Push-in type jumper bar; insulated; 5-way; Nominal current 63 A; light gray

www.wago.com/811-475

Supus modificărilor.

	Nr. articol: 811-476 Push-in type jumper bar; insulated; 6-way; Nominal current 63 A; light gray	www.wago.com/811-476
	Nr. articol: 811-477 Push-in type jumper bar; insulated; 7-way; Nominal current 63 A; light gray	www.wago.com/811-477
	Nr. articol: 811-478 Push-in type jumper bar; insulated; 8-way; Nominal current 63 A; light gray	www.wago.com/811-478
	Nr. articol: 811-479 Push-in type jumper bar; insulated; 9-way; Nominal current 63 A; light gray	www.wago.com/811-479
	Nr. articol: 811-480 Push-in type jumper bar; insulated; 10-way; Nominal current 63 A; light gray	www.wago.com/811-480
	Nr. articol: 811-481 Push-in type jumper bar; insulated; 11-way; Nominal current 63 A; light gray	www.wago.com/811-481
	Nr. articol: 811-482 Push-in type jumper bar; insulated; 12-way; Nominal current 63 A; light gray	www.wago.com/811-482
Supply module		
	Nr. articol: 811-471 Supply module; 35 mm ² ; for 811 Series Fuse Terminal Blocks; SCREW CLAMP CONNECTION; light gray	www.wago.com/811-471

Descărcări

Documentation

Additional Information

Technical explanations	Apr 3, 2019	pdf 2,1 MB	Descărcare
------------------------	-------------	---------------	------------

CAD/CAE-Data

CAE data

EPLAN Data Portal 811-310	URL	Descărcare
WSCAD Universe 811-310	URL	Descărcare

Installation Notes

Installation


Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG
/Representative Office Romania
Sos. Pipera-Tunari nr. 1/1
building 1, 2nd floor | 077190 Voluntari, Ilfov
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.




Creating a 2- or 3-pole fuse terminal block via coupling kit.

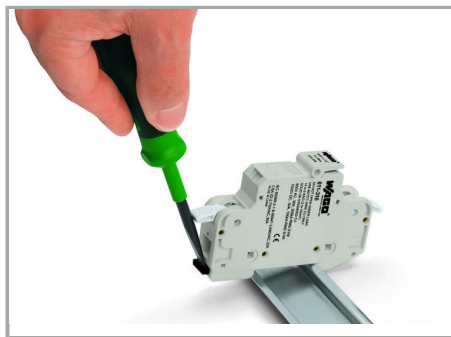


Removing a terminal block from the carrier rail.


Conductor termination

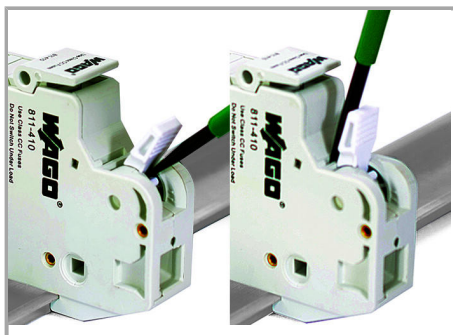

Opening/closing lever via screwdriver.

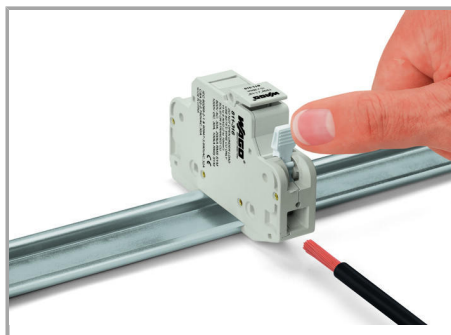

CAGE CLAMP® connection

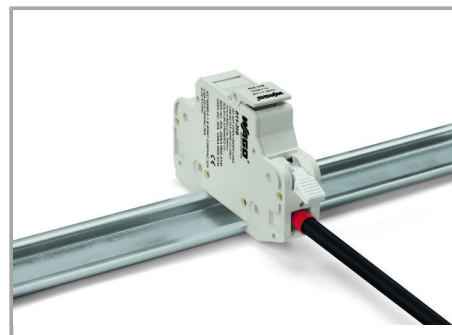


Terminating ferruled conductors up to 10 mm² (8 AWG).

Inserting a conductor via screwdriver.


Opening the clamping unit via integrated lever.

Commoning

Supus modificărilor.

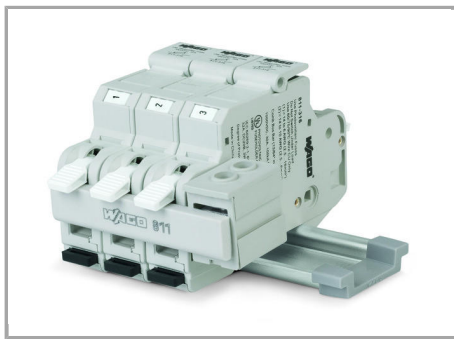


Jumper bar for quick and convenient commoning

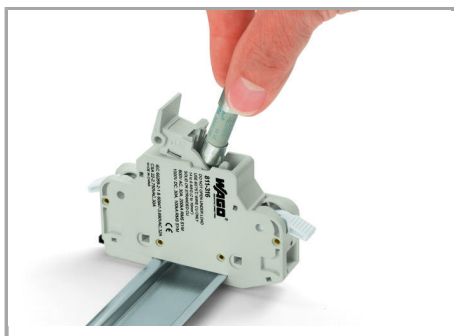


Inserting a fuse.

Marking

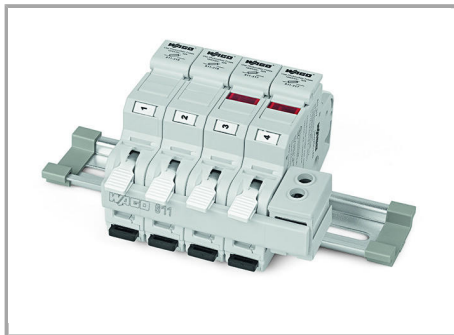

WMB marking location for convenient identification

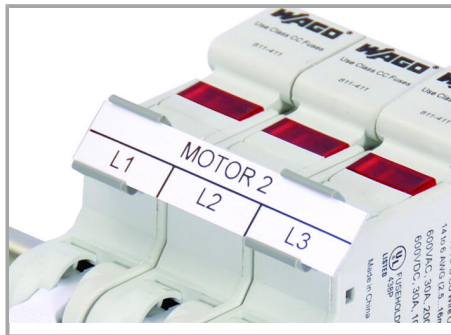

Marker carriers (285-442) for continuous marking strips

Supus modificărilor.