
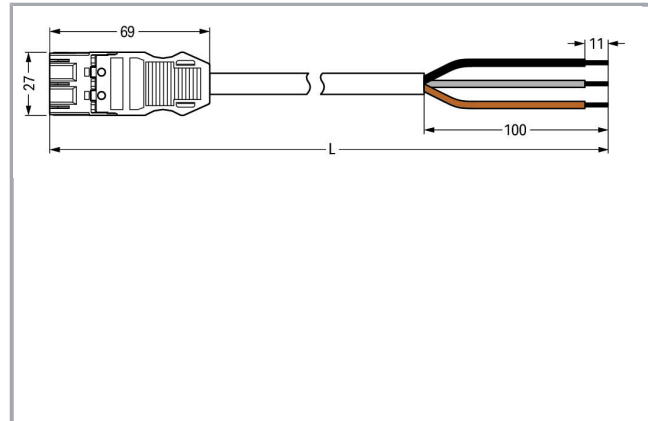


## Fișă tehnică | Număr articol: 771-9973/216-305

pre-assembled connecting cable; Eca; Plug/open-ended; 3-pole; Cod. S; 3 m; 1,50 mm<sup>2</sup>; brown

[www.wago.com/771-9973/216-305](http://www.wago.com/771-9973/216-305)

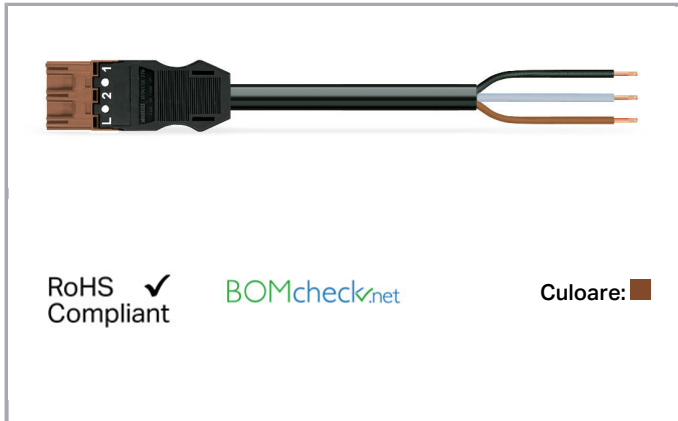

### Descriere articol

- Protected against mismatching and maintenance-free

### Note:

Cables with a different fire class can be found in the eShop.

### Note on mismatching protection:

All WINSTA<sup>®</sup> components are 100% protected against mismatching when:

- plugging different numbers of poles
- plugging while rotated 180
- plugging while laterally staggered
- plugging one pole

### Safety information 1:

Application note for the U.S. market (USR): Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 16 A and voltages up to 600 V. For further information, please contact your local sales office.

### Date

### Electrical data

Note on Contact Resistance

approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/socket

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

## Ratings per IEC/EN 60664-1

|                             |   |
|-----------------------------|---|
| Ratings per                 | IEC/EN 60664-1  |
| Nominal voltage (III/3)     | 250 V   |
| Rated surge voltage (III/3) | 4 kV  |
| Rated current               | 16 A  |
| Legend (ratings)            | (III / 3) ≙ Overvoltage category III / Pollution degree 3 |

## Approvals per UL 1977

|                       |       |
|-----------------------|-------|
| Rated voltage UL 1977 | 600 V |
| Rated current UL 1977 | 23 A  |

## Connection data

|                                 |                     |
|---------------------------------|---------------------|
| Strip length                    | 11 mm / 0.43 inch   |
| Pole No.                        | 3                   |
| Total number of potentials      | 3                   |
| Conductor preparation           | tip-bonded          |
| Sheathed cable diameter         | 7,4 ... 9,4 mm      |
| Wire cross-section              | 1,5 mm <sup>2</sup> |
| Strip length (outer insulation) | 100 mm              |
| Connection type                 | Plug - Free end     |

## Geometrical Data

|              |                    |
|--------------|--------------------|
| Pin spacing  | 10 mm / 0.394 inch |
| Total length | 3 m                |

## Mechanical data

|   |  |
|---|--|
| Coding                                  | S  |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)   |
| Retention force of a plug-in connection | when locked: > 80N   |
| Unmating force of a plug-in connection  | when unlocked: approx. 20 ... 70 N (depending on pole number)                                    |
| Number of mating cycles                 | 200 (without resistive load) 100 (with resistive load $I_N = 25$ A), tested (4 mm <sup>2</sup> ) |
| Connection type                         | Plug - free end  |
| Type of pre-assembled cable             | Connecting cable   |
| Cable type                              | H05Z1Z1-F 3x1.5  |

Supus modificărilor.



|                         |   |
|-------------------------|---|
| Marking                 | 1 2 L   |
| Protection type         | IP20  |
| Note on protection type | Only when mated (these compact connectors are not designed for use in open, easily accessible areas). |
| Potential marking       | 1 2 L   |
| Application             | Switching function  |
| Suitable                | for distribution connectors; series and two-way circuits  |

### Plug connection

|                               |               |
|-------------------------------|---------------|
| Mismating protection          | Yes           |
| Locking of plug-in connection | locking lever |
| Locking lever                 | retrofitable  |

### Material Data

|                                  |  |
|----------------------------------|--|
| Color                            | brown                                    |
| Insulation material              | Polyamide 66 (PA 66)                     |
| Fire class per EN 50575          | E <sub>ca</sub>                          |
| Contact material                 | Copper or copper alloy (surface-treated) |
| Fire load                        | 6 MJ                                     |
| Connector color                  | brown                                    |
| Printing color of mating face    | white                                    |
| Strain relief color              | black                                    |
| Printing color of strain relief  | white                                    |
| Sheathed cable color             | black                                    |
| Printing color of sheathed cable | white                                    |
| Halogen-free                     | Yes                                      |
| Weight                           | 302,5 g                                  |

### Environmental Requirements

|  |   |
|--|---|
| Processing temperature                   | -5 ... +40 °C   |
| Continuous operating temperature         | -35 ... +85 °C  |
| Note on continuous operating temperature | PVC cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

### Commercial data

|                   |            |
|-------------------|------------|
| Packaging type    | not packed |
| Country of origin | DE         |

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

|                       |               |
|-----------------------|---------------|
| GTIN                  | 4050821311003 |
| Customs tariff number | 85444290900   |

## Aprobări / certificate

### Country specific Approvals

| Emblemă  | Aprobare                                     | Text de aprobare suplimentar | Nume certificat |
|--|--|------------------------------|-----------------|
|  | <b>CCA</b><br>DEKRA Certification B.V.       | EN 61535                     | NTR NL-7355     |
|  | <b>KEMA/KEUR</b><br>DEKRA Certification B.V. | EN 61535                     | 2179129.01      |

## Counterpart

## Produse compatibile

### protection



**Nr. articol: 770-360**  
Lockout cap; for plugs; 5-pole; separable; yellow

[www.wago.com/770-360](http://www.wago.com/770-360)

### Marking accessories

**Nr. articol: 210-334**  
Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white

[www.wago.com/210-334](http://www.wago.com/210-334)



**Nr. articol: 770-450**  
Marker card; Plastic; white

[www.wago.com/770-450](http://www.wago.com/770-450)



**Nr. articol: 770-450/000-001**  
Marker card; Plastic; white

[www.wago.com/770-450/000-001](http://www.wago.com/770-450/000-001)



**Nr. articol: 770-450/000-002**  
Marker card; Plastic; white

[www.wago.com/770-450/000-002](http://www.wago.com/770-450/000-002)



**Nr. articol: 770-450/000-005**  
Marker card; Plastic; white

[www.wago.com/770-450/000-005](http://www.wago.com/770-450/000-005)

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: [info-RO@wago.com](mailto:info-RO@wago.com)

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.



Nr. articol: 770-450/000-006  
Marker card; Plastic; white

[www.wago.com/770-450/000-006](http://www.wago.com/770-450/000-006)



Nr. articol: 770-450/000-012  
Marker card; Plastic; white

[www.wago.com/770-450/000-012](http://www.wago.com/770-450/000-012)

## Descărcări

### CAD/CAE-Data

#### CAE data

WSCAD Universe 771-9973/216-305

URL

Descărcare

## Installation Notes

## Familie de produse

<i>WINSTA</i>® MIDI

Afișare globală produse din familie.

Supus modificărilor.