
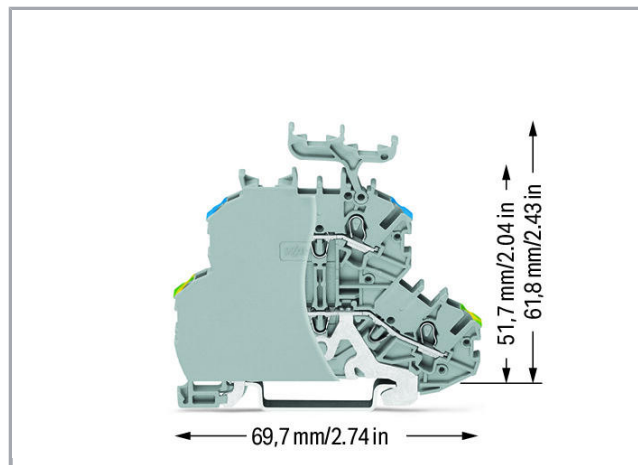


## Fișă tehnică | Număr articol: 2000-2247/099-000

Double-deck terminal block; Ground conductor/through terminal block; PE /N; with marker carrier; for DIN-rail 35 x 15 and 35 x 7.5; 1 mm<sup>2</sup>; Push-in CAGE CLAMP®; 1,00 mm<sup>2</sup>; gray


[www.wago.com/2000-2247/099-000](http://www.wago.com/2000-2247/099-000)

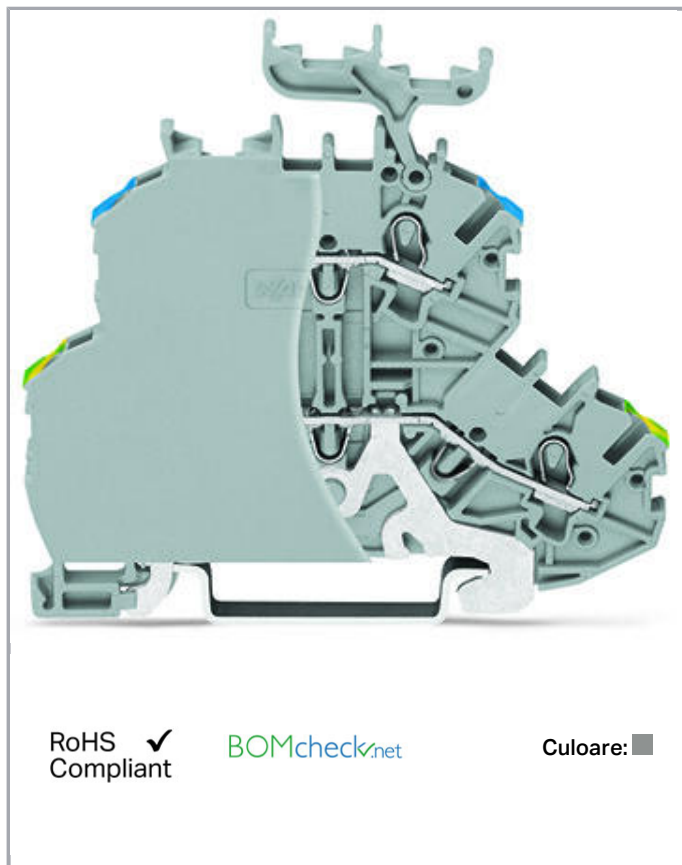

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

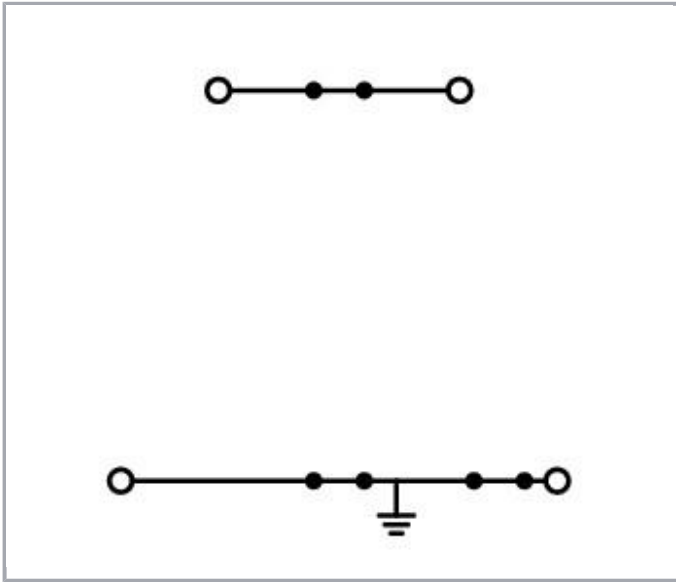**Date****Electrical data****Ratings per IEC/EN 60664-1**

| Ratings per                 | IEC/EN 60947-7-1                                          |
|-----------------------------|-----------------------------------------------------------|
| Nominal voltage (III/3)     | 800 V                                                     |
| Rated surge voltage (III/3) | 8 kV                                                      |
| Rated current               | 13,5 A                                                    |
| Rated current 2             | 16 A                                                      |
| Legend (ratings)            | (III / 3) ≙ Overvoltage category III / Pollution degree 3 |

**Approvals per UL 1059**

|                                |         |
|--------------------------------|---------|
| Rated voltage UL (Use Group B) | 600 V   |
| Rated current UL (Use Group B) | 15 A    |
| Rated voltage UL (Use Group C) | 600 V   |
| Rated current UL (Use Group C) | 15 A    |
| Approvals per                  | UL 1059 |

**Connection data**

|                                               |                     |
|-----------------------------------------------|---------------------|
| Connection technology                         | Push-in CAGE CLAMP® |
| Number of connection points (connection type) | 2                   |
| Actuation type                                | Push-in             |

Supus modificărilor.



|                                                            | Open Tool Slot                                                                                                                    |
|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Connectable conductor materials                            | Copper                                                                                                                            |
| Nominal cross-section                                      | 1 mm <sup>2</sup>                                                                                                                 |
| Solid conductor                                            | 0,14 ... 1,5 mm <sup>2</sup> / 24 ... 16 AWG                                                                                      |
| Solid conductor; push-in termination                       | 0,5 ... 1,5 mm <sup>2</sup> / 20 ... 16 AWG                                                                                       |
| Fine-stranded conductor                                    | 0,14 ... 1,5 mm <sup>2</sup> / 24 ... 16 AWG                                                                                      |
| Fine-stranded conductor; with insulated ferrule            | 0,5 ... 0,75 mm <sup>2</sup> / 20 ... 18 AWG                                                                                      |
| Fine-stranded conductor; with ferrule; push-in termination | 0,5 ... 0,75 mm <sup>2</sup> / 20 ... 18 AWG                                                                                      |
| Strip length                                               | 9 ... 11 mm / 0.35 ... 0.43 inch                                                                                                  |
| Number of connection points                                | 2                                                                                                                                 |
| Total number of connection points                          | 4                                                                                                                                 |
| Total number of potentials                                 | 2                                                                                                                                 |
| Number of levels                                           | 2                                                                                                                                 |
| Wiring type                                                | Front-entry wiring                                                                                                                |
| Note (conductor cross-section)                             | Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination. |

### Geometrical Data

|                                    |                      |
|------------------------------------|----------------------|
| Width                              | 4,2 mm / 0.165 inch  |
| Height from upper-edge of DIN-rail | 61,8 mm / 2.433 inch |
| Depth                              | 69,7 mm / 2.744 inch |

### Mechanical data

|                   |                     |
|-------------------|---------------------|
| Design            | horizontal type     |
| Mounting type     | DIN-35 rail         |
| Potential marking | PE/N                |
| Marking level     | Center/side marking |

### Material Data

|                     |                      |
|---------------------|----------------------|
| Color               | gray                 |
| Insulation material | Polyamide 66 (PA 66) |
| Fire load           | 0,214 MJ             |
| Weight              | 11,8 g               |

### Commercial data

|                |               |
|----------------|---------------|
| Product Group  | 22 (TOPJOB S) |
| Packaging type | BOX           |

Supus modificărilor.


WAGO Kontakttechnik GmbH & Co. KG  
 /Representative Office Romania  
 Sos. Pipera-Tunari nr. 1/1  
 building 1, 2nd floor | 077190 Voluntari, Ilfov  
 Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
 Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.



|                       |               |
|-----------------------|---------------|
| Country of origin     | DE            |
| GTIN                  | 4050821037743 |
| Customs tariff number | 85369010000   |

## Aprobări / certificate

### Ex-Approvals

| Emblemă                                                                          | Aprobare                              | Text de aprobare suplimentar | Nume certificat |
|----------------------------------------------------------------------------------|---------------------------------------|------------------------------|-----------------|
|  | AEx<br>Underwriters Laboratories Inc. | UL 60079                     | E185892         |

### Country specific Approvals

| Emblemă                                                                           | Aprobare                        | Text de aprobare suplimentar | Nume certificat |
|-----------------------------------------------------------------------------------|---------------------------------|------------------------------|-----------------|
|   | CCA<br>DEKRA Certification B.V. | EN 60947                     | 71-102841       |
|  | CCA<br>DEKRA Certification B.V. | EN 60947                     | NTR NL 7671     |

## Counterpart

## Produse compatibile

### Protective Warning Marker



Nr. articol: 2001-115

Protective warning marker; with high-voltage symbol, black; for 5 terminal blocks; yellow

[www.wago.com/2001-115](http://www.wago.com/2001-115)


















### Push-In type wire jumper

Nr. articol: 2009-402

















Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com
















Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

|                                                                                    |                                                                                                                                                                                                              |                                                                  |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
|    | Push-in type wire jumper; insulated; wire length 60 mm; Conductor cross section 0.75 mm <sup>2</sup> ; suitable for 2000 and 2020 Series rail-mounted terminal blocks; gray                                  | <a href="http://www.wago.com/2009-402">www.wago.com/2009-402</a> |
|    | <b>Nr. articol: 2009-404</b><br>Push-in type wire jumper; insulated; wire length 110 mm; Conductor cross section 0.75 mm <sup>2</sup> ; suitable for 2000 and 2020 Series rail-mounted terminal blocks; gray | <a href="http://www.wago.com/2009-404">www.wago.com/2009-404</a> |
|    | <b>Nr. articol: 2009-406</b><br>Push-in type wire jumper; insulated; wire length 250 mm; Conductor cross section 0.75 mm <sup>2</sup> ; suitable for 2000 and 2020 Series rail-mounted terminal blocks; gray | <a href="http://www.wago.com/2009-406">www.wago.com/2009-406</a> |
| <b>check</b>                                                                       |                                                                                                                                                                                                              |                                                                  |
|    | <b>Nr. articol: 2000-510</b><br>TOPJOB®S L-type test plug module; modular; for jumper contact slot; 1,00 mm <sup>2</sup> ; gray                                                                              | <a href="http://www.wago.com/2000-510">www.wago.com/2000-510</a> |
|    | <b>Nr. articol: 2000-511</b><br>TOPJOB®S L-type test plug module; modular; for jumper contact slot; 1-pole; 1,00 mm <sup>2</sup> ; gray                                                                      | <a href="http://www.wago.com/2000-511">www.wago.com/2000-511</a> |
|    | <b>Nr. articol: 2000-549</b><br>Spacer module; modular; e.g., for bridging commoned terminal blocks; gray                                                                                                    | <a href="http://www.wago.com/2000-549">www.wago.com/2000-549</a> |
|    | <b>Nr. articol: 2000-552</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 2-pole; 1,00 mm <sup>2</sup> ; gray                                                                            | <a href="http://www.wago.com/2000-552">www.wago.com/2000-552</a> |
|    | <b>Nr. articol: 2000-553</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 3-pole; 1,00 mm <sup>2</sup> ; gray                                                                            | <a href="http://www.wago.com/2000-553">www.wago.com/2000-553</a> |
|   | <b>Nr. articol: 2000-554</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 4-pole; 1,00 mm <sup>2</sup> ; gray                                                                            | <a href="http://www.wago.com/2000-554">www.wago.com/2000-554</a> |
|  | <b>Nr. articol: 2000-555</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 5-pole; 1,00 mm <sup>2</sup> ; gray                                                                            | <a href="http://www.wago.com/2000-555">www.wago.com/2000-555</a> |
|  | <b>Nr. articol: 2000-556</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 6-pole; 1,00 mm <sup>2</sup> ; gray                                                                            | <a href="http://www.wago.com/2000-556">www.wago.com/2000-556</a> |
|  | <b>Nr. articol: 2000-557</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 7-pole; 1,00 mm <sup>2</sup> ; gray                                                                            | <a href="http://www.wago.com/2000-557">www.wago.com/2000-557</a> |
|  | <b>Nr. articol: 2000-558</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 8-pole; 1,00 mm <sup>2</sup> ; gray                                                                            | <a href="http://www.wago.com/2000-558">www.wago.com/2000-558</a> |
|  | <b>Nr. articol: 2000-559</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 9-pole; 1,00 mm <sup>2</sup> ; gray                                                                            | <a href="http://www.wago.com/2000-559">www.wago.com/2000-559</a> |
|  | <b>Nr. articol: 2000-560</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 10-pole; 1,00 mm <sup>2</sup> ; gray                                                                           | <a href="http://www.wago.com/2000-560">www.wago.com/2000-560</a> |
|  | <b>Nr. articol: 2009-174</b><br>Test plug adapter; for 4 mm Ø test plugs; for testing TOPJOB®S rail-mounted terminal blocks; gray                                                                            | <a href="http://www.wago.com/2009-174">www.wago.com/2009-174</a> |
|  | <b>Nr. articol: 2009-182</b><br>Testing tap; for max. 2.5 mm <sup>2</sup> ; tool-free connection for individual test wires 0.08 - 2.5 mm; gray                                                               | <a href="http://www.wago.com/2009-182">www.wago.com/2009-182</a> |

Supus modificărilor.

|                                                                                    |                                                                                                                                                                                               |                                                                                  |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|    | <b>Nr. articol: 210-136</b><br>Test plug; 2 mm Ø; with 500 mm cable; red                                                                                                                      | <a href="http://www.wago.com/210-136">www.wago.com/210-136</a>                   |
|    | <b>Nr. articol: 210-137</b><br>Test plug; 2.3 mm Ø; with 500 mm cable; yellow                                                                                                                 | <a href="http://www.wago.com/210-137">www.wago.com/210-137</a>                   |
| <b>tools</b>                                                                       |                                                                                                                                                                                               |                                                                                  |
|    | <b>Nr. articol: 210-647</b><br>Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft                                                                                          | <a href="http://www.wago.com/210-647">www.wago.com/210-647</a>                   |
|    | <b>Nr. articol: 210-648</b><br>Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft; angled; short                                                                           | <a href="http://www.wago.com/210-648">www.wago.com/210-648</a>                   |
|    | <b>Nr. articol: 210-719</b><br>Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft                                                                                          | <a href="http://www.wago.com/210-719">www.wago.com/210-719</a>                   |
| <b>ferrule</b>                                                                     |                                                                                                                                                                                               |                                                                                  |
|    | <b>Nr. articol: 216-241</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white | <a href="http://www.wago.com/216-241">www.wago.com/216-241</a>                   |
|    | <b>Nr. articol: 216-242</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray | <a href="http://www.wago.com/216-242">www.wago.com/216-242</a>                   |
|    | <b>Nr. articol: 216-243</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red     | <a href="http://www.wago.com/216-243">www.wago.com/216-243</a>                   |
| <b>Jumper</b>                                                                      |                                                                                                                                                                                               |                                                                                  |
|  | <b>Nr. articol: 2000-492</b><br>Double-deck vertical jumper; insulated; light gray                                                                                                            | <a href="http://www.wago.com/2000-492">www.wago.com/2000-492</a>                 |
|  | <b>Nr. articol: 2001-402</b><br>Push-in type jumper bar; insulated; 2-way; Nominal current 18 A; light gray                                                                                   | <a href="http://www.wago.com/2001-402">www.wago.com/2001-402</a>                 |
|  | <b>Nr. articol: 2001-403</b><br>Push-in type jumper bar; insulated; 3-way; Nominal current 18 A; light gray                                                                                   | <a href="http://www.wago.com/2001-403">www.wago.com/2001-403</a>                 |
|  | <b>Nr. articol: 2001-404</b><br>Push-in type jumper bar; insulated; 4-way; Nominal current 18 A; light gray                                                                                   | <a href="http://www.wago.com/2001-404">www.wago.com/2001-404</a>                 |
|  | <b>Nr. articol: 2001-405</b><br>Push-in type jumper bar; insulated; 5-way; Nominal current 18 A; light gray                                                                                   | <a href="http://www.wago.com/2001-405">www.wago.com/2001-405</a>                 |
|  | <b>Nr. articol: 2001-405/011-000</b><br>Star point jumper; insulated; 3-way (1-3-5); IN = IN terminal block; light gray                                                                       | <a href="http://www.wago.com/2001-405/011-000">www.wago.com/2001-405/011-000</a> |
|  | <b>Nr. articol: 2001-406</b><br>Push-in type jumper bar; insulated; 6-way; Nominal current 18 A; light gray                                                                                   | <a href="http://www.wago.com/2001-406">www.wago.com/2001-406</a>                 |
|  | <b>Nr. articol: 2001-406/020-000</b><br>Delta jumper; insulated; 1-2 3-4 5-6; IN = IN terminal block; light gray                                                                              | <a href="http://www.wago.com/2001-406/020-000">www.wago.com/2001-406/020-000</a> |

Supus modificărilor.


|                                                                                    |                                                                                                                                         |                                                                  |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
|    | <b>Nr. articol: 2001-407</b><br>Push-in type jumper bar; insulated; 7-way; Nominal current 18 A; light gray                             | <a href="http://www.wago.com/2001-407">www.wago.com/2001-407</a> |
|    | <b>Nr. articol: 2001-408</b><br>Push-in type jumper bar; insulated; 8-way; Nominal current 18 A; light gray                             | <a href="http://www.wago.com/2001-408">www.wago.com/2001-408</a> |
|    | <b>Nr. articol: 2001-409</b><br>Push-in type jumper bar; insulated; 9-way; Nominal current 18 A; light gray                             | <a href="http://www.wago.com/2001-409">www.wago.com/2001-409</a> |
|    | <b>Nr. articol: 2001-410</b><br>Push-in type jumper bar; insulated; 10-way; Nominal current 18 A; light gray                            | <a href="http://www.wago.com/2001-410">www.wago.com/2001-410</a> |
|    | <b>Nr. articol: 2001-433</b><br>Push-in type jumper bar; insulated; from 1 to 3; Nominal current 18 A; light gray                       | <a href="http://www.wago.com/2001-433">www.wago.com/2001-433</a> |
|    | <b>Nr. articol: 2001-434</b><br>Push-in type jumper bar; insulated; from 1 to 4; Nominal current 18 A; light gray                       | <a href="http://www.wago.com/2001-434">www.wago.com/2001-434</a> |
|    | <b>Nr. articol: 2001-435</b><br>Push-in type jumper bar; insulated; from 1 to 5; Nominal current 18 A; light gray                       | <a href="http://www.wago.com/2001-435">www.wago.com/2001-435</a> |
|    | <b>Nr. articol: 2001-436</b><br>Push-in type jumper bar; insulated; from 1 to 6; Nominal current 18 A; light gray                       | <a href="http://www.wago.com/2001-436">www.wago.com/2001-436</a> |
|    | <b>Nr. articol: 2001-437</b><br>Push-in type jumper bar; insulated; from 1 to 7; Nominal current 18 A; light gray                       | <a href="http://www.wago.com/2001-437">www.wago.com/2001-437</a> |
|   | <b>Nr. articol: 2001-438</b><br>Push-in type jumper bar; insulated; from 1 to 8; Nominal current 18 A; light gray                       | <a href="http://www.wago.com/2001-438">www.wago.com/2001-438</a> |
|  | <b>Nr. articol: 2001-439</b><br>Push-in type jumper bar; insulated; from 1 to 9; Nominal current 18 A; light gray                       | <a href="http://www.wago.com/2001-439">www.wago.com/2001-439</a> |
|  | <b>Nr. articol: 2001-440</b><br>Push-in type jumper bar; insulated; from 1 to 10; Nominal current 18 A; light gray                      | <a href="http://www.wago.com/2001-440">www.wago.com/2001-440</a> |
|  | <b>Nr. articol: 210-103</b><br>Wire commoning chain; insulated; 50 connections; black                                                   | <a href="http://www.wago.com/210-103">www.wago.com/210-103</a>   |
|  | <b>Nr. articol: 210-123</b><br>Wire commoning chain; insulated; 50 connections                                                          | <a href="http://www.wago.com/210-123">www.wago.com/210-123</a>   |
| <b>Carrier rail</b>                                                                |                                                                                                                                         |                                                                  |
|  | <b>Nr. articol: 210-112</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm | <a href="http://www.wago.com/210-112">www.wago.com/210-112</a>   |
|                                                                                    | <b>Nr. articol: 210-113</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715                  | <a href="http://www.wago.com/210-113">www.wago.com/210-113</a>   |
|                                                                                    | <b>Nr. articol: 210-114</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715                   | <a href="http://www.wago.com/210-114">www.wago.com/210-114</a>   |
|                                                                                    | <b>Nr. articol: 210-115</b>                                                                                                             |                                                                  |


Supus modificărilor.

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm" [www.wago.com/210-115](http://www.wago.com/210-115)

**Nr. articol: 210-118**  
Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715 [www.wago.com/210-118](http://www.wago.com/210-118)

**Nr. articol: 210-196**  
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored [www.wago.com/210-196](http://www.wago.com/210-196)


 **Nr. articol: 210-197**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715 [www.wago.com/210-197](http://www.wago.com/210-197)


 **Nr. articol: 210-198**  
Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored [www.wago.com/210-198](http://www.wago.com/210-198)


#### Marking accessories


 **Nr. articol: 2000-121**  
Adaptor [www.wago.com/2000-121](http://www.wago.com/2000-121)


 **Nr. articol: 2009-110**  
Marking strips; on reel; not stretchable; plain; snap-on type; white [www.wago.com/2009-110](http://www.wago.com/2009-110)


 **Nr. articol: 2009-113**  
WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; white [www.wago.com/2009-113](http://www.wago.com/2009-113)


 **Nr. articol: 2009-113/000-002**  
WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; yellow [www.wago.com/2009-113/000-002](http://www.wago.com/2009-113/000-002)


 **Nr. articol: 2009-113/000-005**  
WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; red [www.wago.com/2009-113/000-005](http://www.wago.com/2009-113/000-005)

 **Nr. articol: 2009-113/000-006**  
WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; blue [www.wago.com/2009-113/000-006](http://www.wago.com/2009-113/000-006)

 **Nr. articol: 2009-113/000-007**  
WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; gray [www.wago.com/2009-113/000-007](http://www.wago.com/2009-113/000-007)

 **Nr. articol: 2009-113/000-012**  
WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; orange [www.wago.com/2009-113/000-012](http://www.wago.com/2009-113/000-012)

 **Nr. articol: 2009-113/000-017**  
WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; light green [www.wago.com/2009-113/000-017](http://www.wago.com/2009-113/000-017)

 **Nr. articol: 2009-113/000-023**  
WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; green [www.wago.com/2009-113/000-023](http://www.wago.com/2009-113/000-023)

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.





Nr. articol: 2009-113/000-024

WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; violet

[www.wago.com/2009-113/000-024](http://www.wago.com/2009-113/000-024)



Nr. articol: 793-3501

WMB marking card; as card; plain; snap-on type; white

[www.wago.com/793-3501](http://www.wago.com/793-3501)

## Descărcări Documentation

### Additional Information

|                        |             |               |            |
|------------------------|-------------|---------------|------------|
| Technical explanations | Apr 3, 2019 | pdf<br>2,1 MB | Descărcare |
|------------------------|-------------|---------------|------------|

## CAD/CAE-Data

### CAD data

|                                |     |            |
|--------------------------------|-----|------------|
| 2D/3D Models 2000-2247/099-000 | URL | Descărcare |
|--------------------------------|-----|------------|


### CAE data

|                                     |     |            |
|-------------------------------------|-----|------------|
| EPLAN Data Portal 2000-2247/099-000 | URL | Descărcare |
|-------------------------------------|-----|------------|


|                                  |     |            |
|----------------------------------|-----|------------|
| WSCAD Universe 2000-2247/099-000 | URL | Descărcare |
|----------------------------------|-----|------------|

## Installation Notes

### Conductor termination

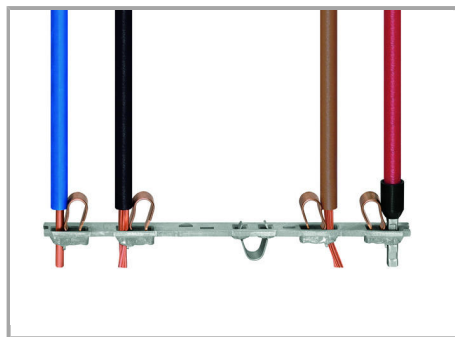


All conductor types at a glance

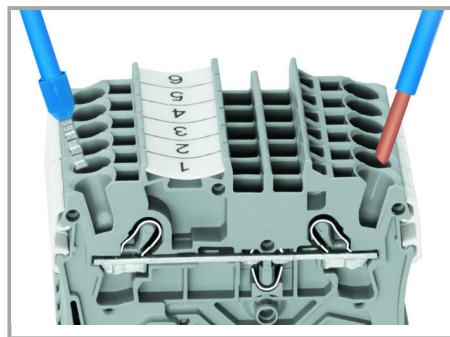


Terminating solid and ferruled conductors via push-in connection.


Supus modificărilor.

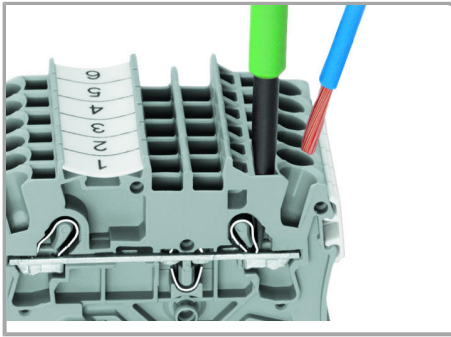

Inserting a conductor via operating tool.

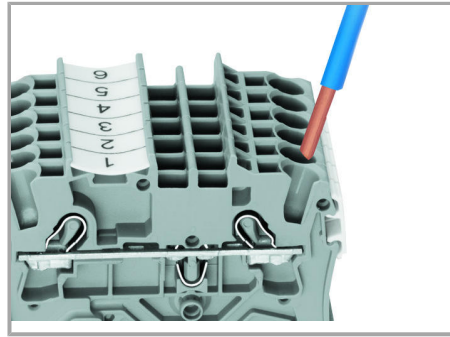

Inserting conductors via push-in termination.

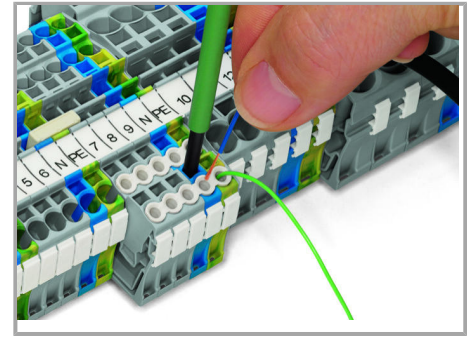

Conductor termination – Insulation stop.


Connecting fine-stranded conductors without ferrules, or small cross-sectional conductors that cannot be pushed in, is performed similarly to the original CAGE CLAMP® – just use an operating tool.

**Solid conductors** with cross-sections from either one size above, or up to two sizes below, the rated cross-section can be simply pushed in – no tools needed.



#### The smart feature:

To open the clamp, the operating tool is inserted vertically. The conductor entry is less than 15 degrees for easier wiring.

#### Marking

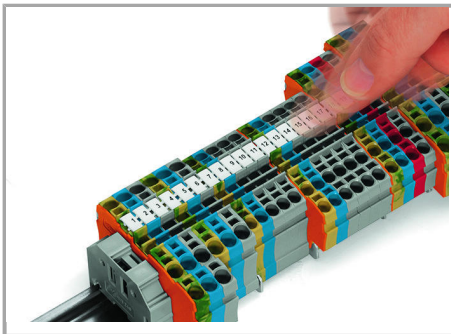

Snapping WMB Inline markers into marker slots.

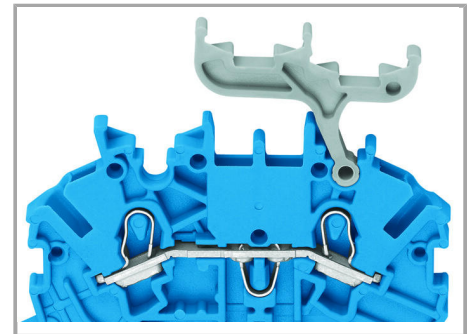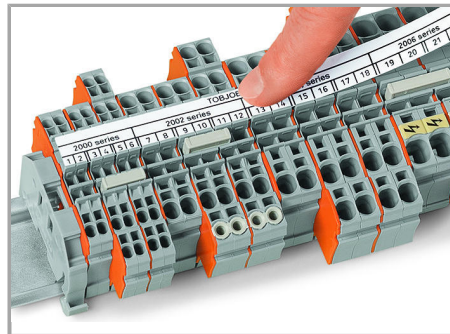

#### Double-Deck Terminal Blocks

A double-deck marker carrier (2000-121) can be retrofitted to double-deck terminal blocks without a marker carrier.

Supus modificărilor.



## Familie de produse

### TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[Afișare globală produse din familie.](#)

Supus modificărilor.