


Fișă tehnică | Număr articol: 790-145

Carrier rail; with special perforations; 1000 mm long; tin-plated

www.wago.com/790-145

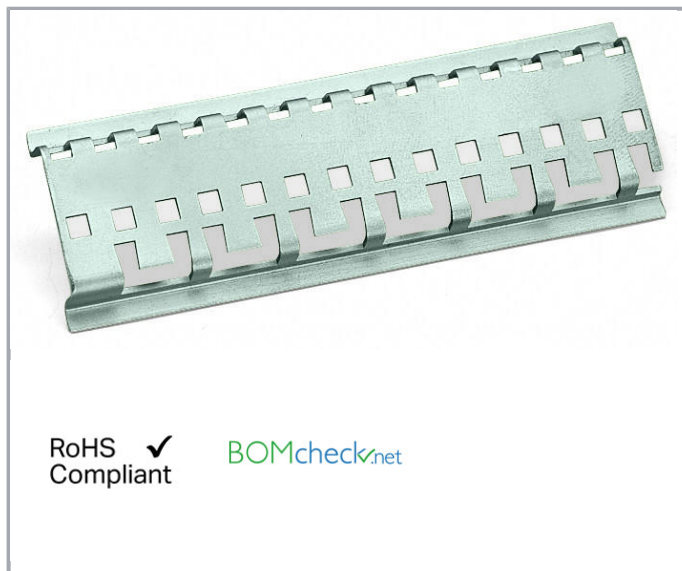

Date

Technical Data

Main product function

Shield termination

Geometrical Data

Width

1000 mm / 39.37 inch

Material Data

Weight

256 g

Commercial data

Packaging type

BOX

Country of origin

IT

GTIN

4045454701109

Customs tariff number

72169180000

Counterpart

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG
/Representative Office Romania
Sos. Pipera-Tunari nr. 1/1
building 1, 2nd floor | 077190 Voluntari, Ilfov
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

Descărcări CAD/CAE-Data

CAD data

2D/3D Models 790-145

[URL](#)

[Descărcare](#)


CAE data

WSCAD Universe 790-145


[URL](#)

[Descărcare](#)


Installation Notes

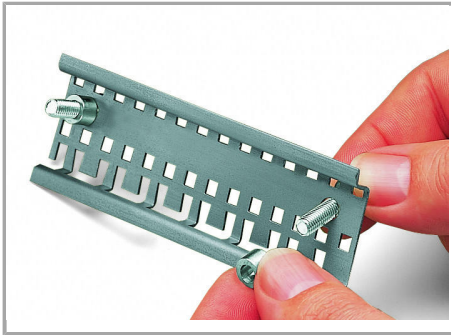


Fitting a spacer sleeve to a specialty slotted carrier rail.

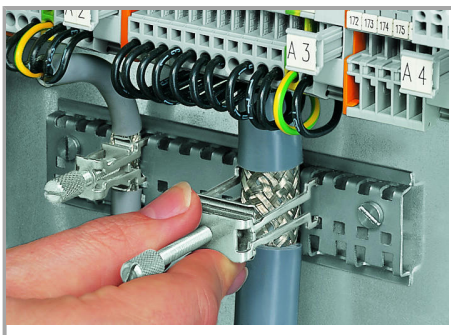

Fitting an additional clamping saddle.

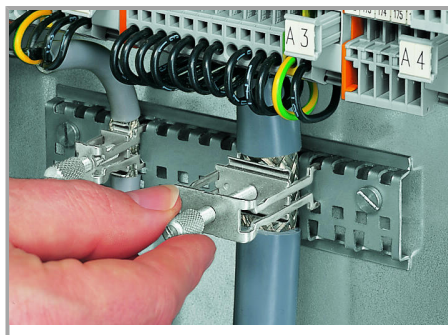


Tightening/removing a shield clamping saddle.

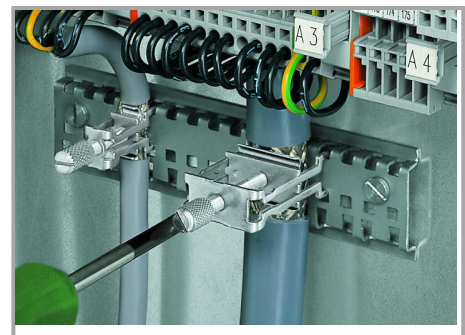

After connection, tighten the knurled screw to complete the installation.

Recommended tightening torque: 0.5 Nm

Supus modificărilor.

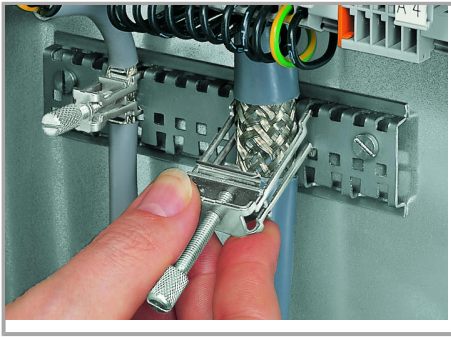

To remove the clamping saddle, unscrew until ratcheted mechanism is released, then slightly tip saddle and remove the clamping saddle.

Supus modificărilor.